


AX61221TM

2U Rackmount Chassis for ATX Motherboard

Features

- Supports 12" x 9.6" standard ATX MB & IMB200
- Internal one 3.5" HDD drive baysn Front-accessible one 3.5", one 5.25" and one slim CD-ROM

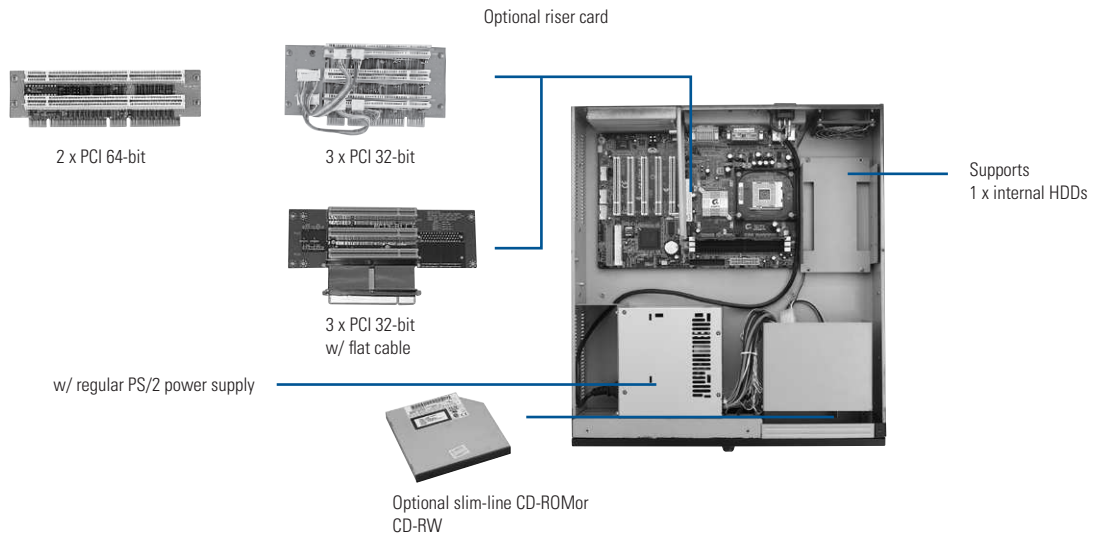

Specifications

Standard Color	Black
Construction	Heavy-duty steel
Form Factor	12" x 9.6" ATX MB
Drive Capacity	Exposed 1 x slim-line CD-ROM, 1 x 3.5" HDD drive bay & 1 x 5.25" HDD drive bay; internal 1 x 3.5" HDD drive bay
Cooling	1 x 8 cm ball-bearing fan (38.6 CFM/each)
Front Panel Indicators	1 x power on/off; 1 x HDD
Front Panel Controls	1 x power on/off; 1 x system reset
Front Panel Connectors	2 x USB

Expansion Interface	PCI riser card with 3-slot 32-bit (optional)
Speaker	1 x 0.3W speaker
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
RangeDimensions	482.6 mm (19") (W) x 450 mm (17.7") (D) x 88.9 mm (3.5") (H)
Weight (net/gross)	12 kg (26.45 lb)/13.5 kg (29.77 lb)

Power Supply Specifications


Items	Watt	Input	Specifications		MTBF
			Output		
PS300-XP2	ATX 300W (PFC)	AC 90-264V (Auto)	+5V @ 30/21.5A	100,000 hours	
			+12V @ 15A		
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+12V @ 0.8A	100,000 hours	
			+3.3V @ 15/28A		
PS500-XP2	ATX 500W (PFC)	AC 90-264V (Auto)	+5VSB @ 2A	100,000 hours	
			-5V @ 0.3A		
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+5V @ 20A	100,000 hours	
			+12V1 @ 16A		
PS500-XP2	ATX 500W (PFC)	AC 90-264V (Auto)	+12V2 @ 16A	100,000 hours	
			-12V @ 0.5A		
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+3.3V @ 20A	100,000 hours	
			+5VSB @ 2.5A		
PS500-XP2	ATX 500W (PFC)	AC 90-264V (Auto)	+5V @ 24A	100,000 hours	
			+12V @ 34A		
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+12V1 @ 17A	100,000 hours	
			+12V2 @ 17A		
PS500-XP2	ATX 500W (PFC)	AC 90-264V (Auto)	-12V @ 0.8A	100,000 hours	
			+3.3V @ 24A		
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+5VSB @ 2.5A	100,000 hours	

Ordering Information

AX61221TM/X300	With ATX 300W power supply
AX61221TM/X400	With ATX 400W power supply
AX61221TM/X500	With ATX 500W power supply

*Specifications and certifications are based on options and may vary.

Dimensions

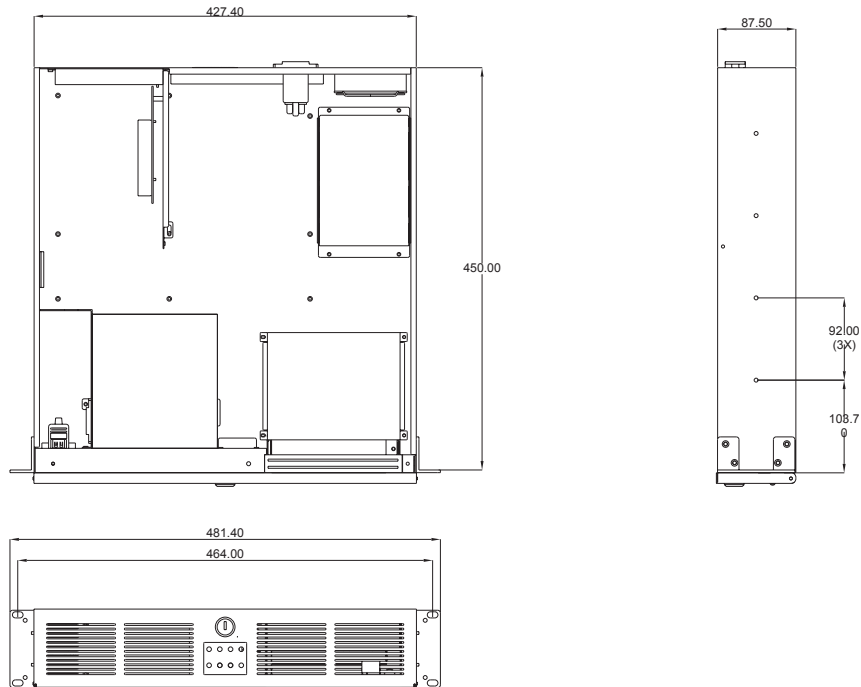

Optional Items

PCI 3	3-slot PCI 32-bit riser card
AX96114	3-slot PCI 32-bit riser card w/ flat cable
AX96118	2-slot PCI 64-bit riser card

Overview

Embedded Systems

Embedded Systems for Transportation

Embedded Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Backplanes

Power Supplies

Peripherals & Accessories

Appendix