


# P1177S-871

17" SXGA TFT Intel® Core™ i7/ i5/ i3 Slim Industrial Panel Computer

**NEW**

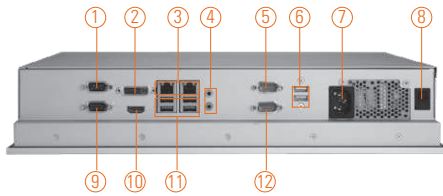

- |   |                   |                    |
|---|-------------------|--------------------|
| 1. COM 1 with 5V & 12V (RS-232/422/485) | 6. USB 2.0 x 2    | 11. USB 3.0 x 4    |
| 2. DVI-I                                | 7. AC plug        | 12. COM 4 (RS-232) |
| 3. Ethernet x 2                         | 8. Power switch   |                    |
| 4. Audio (MIC-in/Line-out)              | 9. COM 2 (RS-232) |                    |
| 5. COM 3 with 5V & 12V (RS-232)         | 10. HDMI          |                    |



IP65



DualView



DDR3

## Introduction

The P1177S-871 is a multi-media panel PC for kiosk application. It has a fashionable mechanism design and industrial-grade material front bezel which can avoid damage from chemical corrosion. To meet the demands of multimedia application, the P1177S-871 is powered by the high performance LGA1155 socket 3rd & 2nd Generation Intel® Core™ i7/ i5/ i3/ Celeron® processors (Ivy Bridge & Sandy Bridge) with Intel® Q77 Express chipset. It features four COM ports, two Gigabit Ethernet and up to 16 GB memory of dual-channel DDR3 that delivers high computing capability for high performance-demanding applications. The industrial panel PC is most suitable for kiosk, factory and automation fields.

### Dual display

The P1177S-871 supports DVI and HDMI simultaneously that features the use of dual display devices for increasing the area available for programs running on a single computer system. It not only increases larger screen viewing but also improves personal productivity.

### Speaker and WLAN antenna supported

The P1177S-871 features built-in speakers for kiosk application to display multimedia content program. It also supports WLAN module (optional) antenna for wireless network connectivity.

## Features

- 17" SXGA TFT LCD display
- High performance system supporting LGA1155 socket 3rd & 2nd Generation Intel® Core™ i7/ i5/ i3/ Celeron® processors (Ivy Bridge & Sandy Bridge)
- Easy installation: a less screw design for user's convenience
- 4 USB 3.0, 2 USB 2.0 and 4 COM ports
- Built-in speakers and optional Wi-Fi 802.11 b/g/n module
- Robust aluminum with IP65 compliant front bezel design



▲ Side view

## Specifications

Front Bezel	Aluminum w/ IP65/NEMA 4 rugged protection	
LCD Panel	Display Type	17" SXGA TFT LCD
	Brightness	380 nits
	Resolution	1280 x 1024 pixels
	Viewing Angle	170°/160°
Main System	CPU	LGA1155 socket 3rd & 2nd Generation Intel® Core™ i7/ i5/ i3/ Celeron® processors (Ivy Bridge & Sandy Bridge)
	Chipset	Intel® Q77
	System Memory	2 x 204-pin DDR3 SO-DIMM max. up to 16 GB
	BIOS	AMI
	Storage	1 x 3.5" or 2 x 2.5" SATA HDD
	Watchdog Timer	255 levels, 1-255 sec.

## Specifications

IO Connector	2 x RS-232 (COM 2 & COM 4) 1 x RS-232/422/485 with 5V & 12V (COM 1) 1 x RS-232 with 5V & 12V (COM 3) 1 x DVI-I 1 x HDMI 4 x USB 3.0 2 x USB 2.0 2 x 10/100/1000 Mbps Ethernet 1 x Audio (Mic-in/Mic-out)
Expansion Interface	N/A
Touchscreen	5-wire resistive type Light transmission 79% 1 million activations (typical) at a single point
Power Supply	100 ~ 240VAC, 270W
Dimensions	410 mm (16.14") (W) x 80 mm (3.15") (D) x 338 mm (13.3") (H)
Packing Dimension	610 mm (24.02") (W) x 260 mm (10.24") (D) x 590 mm (23.23") (H)
Weight(net/gross)	7 kg (15.43 lb)/ 10.8 kg (23.8 lb)
Environment	Operating Temperature: 0° ~ +45°C (32°F ~ 113°F) Storage Temperature: -20°C ~ +60°C (-4°F ~ +140°F) Relative humidity: 10 ~ 95%@40°C, non-considering Operating vibration: 1.0G, 5-500Hz, random
Certification	CE

## Ordering Information

P1177S-871 17" SXGA TFT Intel® Core™ i7/ i5/ i3/ Celeron® slim industrial panel computer

\* Specification and certifications are based on options and may vary.

## Optional OS Installation

Windows® 7


Windows® Vista

Windows® XP



▲ Slim design

## Dimensions

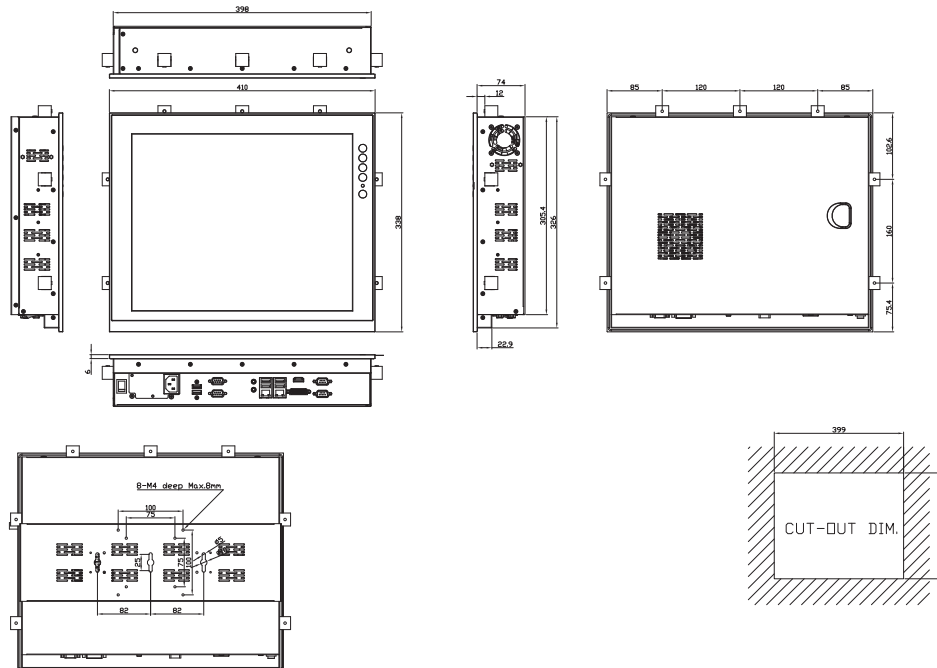

\* All specifications and photos are subject to change without notice.  
© 2013 Axiomtek Co., Ltd. All rights reserved.