


Phase Discriminators Without Video Amplifier

Applications

- Instantaneous Phase and Amplitude
- Phase Locked Loops
- S Parameter Measurements
- Digital Phase Monitors

Features

- 2.0 – 4.0 GHz
- Excellent Phase Accuracy
- Dynamic Range: 30dB
- Voltage/Power Sensitivity: 100mV/mW typ.
- Impedance: 50 ohms
- VSWR: 1.8:1 max
- Additional Screening Available for Military and Space Applications
- Meets MIL-E-5400 Class 3 Requirements

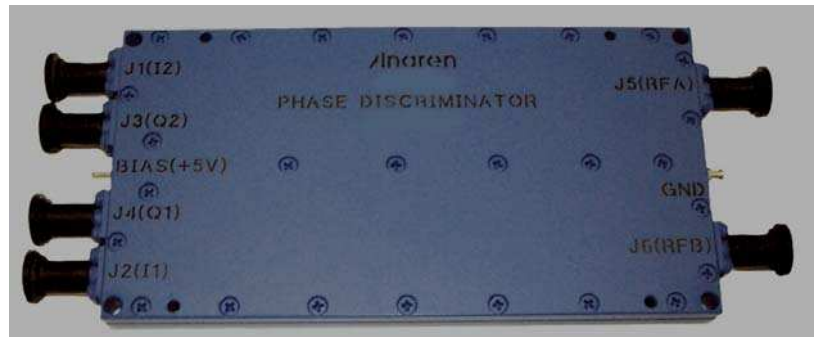

Electrical and Mechanical Specifications subject to change without notice.

Outline Drawing

