

# THYRISTOR MODULE

## SBA500AA

UL:E76102(M)

Power Thyristor Module **SBA500AA** series are designed for high power rectifier control applications. Two independent thyristor elements in a electrically isolated package enable you to achieve flexible design, especially for AC switch application, idial terminal location for bus bar connection helps both your mechanical design and mounting procedure be more efficient. SBA series for two thyristors with blocking voltage up to 1600V are available.



### Isolated mounting base

- $I_{T(AV)}$  500A,  $I_{T(RMS)}$  785A
- $di/dt$  200 A/ $\mu$ s
- $dv/dt$  500V/ $\mu$ s

### (Applications)

- Various rectifiers
- AC/DC motor drives
- Heater controls
- Light dimmers
- Static switches

### Internal Configurations

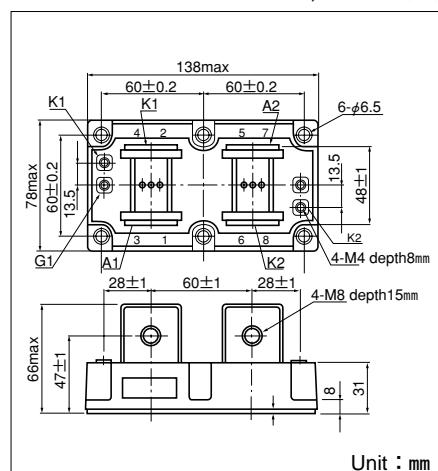

### ■ Maximum Ratings

Symbol	Item	Ratings				Unit
		SBA500AA40	SBA500AA80	SBA500AA120	SBA500AA160	
$V_{DRM}$	Repetitive Peak Off-State Voltage	400	800	1200	1600	V
$V_{RSM}$	Non-Repetitive Peak Reverse Voltage	480	960	1350	1700	V
$V_{RRM}$	Repetitive Peak Reverse Voltage	400	800	1200	1600	V
Symbol	Item	Conditions			Ratings	Unit
$I_{T(AV)}$	Average On-State Current	Single phase, half wave, 180° conduction, $T_c : 66^\circ C$			500	A
$I_{T(RMS)}$	R.M.S. On-State Current	Single phase, half wave, 180° conduction, $T_c : 66^\circ C$			785	A
$I_{TSM}$	Surge On-State Current	$1/2$ cycle, 50Hz/60Hz, peak Value, non-repetitive			9.1/10.0	kA
$I^2t$	$I^2t$	Value for one cycle of surge current			416	kA $\cdot$ s
$P_{GM}$	Peak Gate Power Dissipation				15	W
$P_{G(AV)}$	Average Gate Power Dissipation				5	W
$I_{FGM}$	Peak Gate Current				5	A
$V_{FGM}$	Peak Gate Voltage (Forward)				10	V
$V_{RGM}$	Peak Gate Voltage (Reverse)				5	V
$di/dt$	Critical Rate of Rise of On-State Current	$I_G = 200mA, V_D = 1/2 V_{DRM}, dI_G/dt = 0.2A/\mu s$			200	A/ $\mu$ s
$V_{iso}$	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute			2500	V
$T_j$	Operating Junction Temperature				-40 to +125	°C
$T_{stg}$	Storage Temperature				-40 to +125	°C
Mounting Torque	Mounting (M6)	Recommended Value 2.5-3.9 (Recommended Value 25-40)			4.7 (48)	N·m (kgf·cm)
		Recommended Value 8.8-10 (Recommended Value 90-105)			11.0 (115)	N·m (kgf·cm)
	Terminal (M8)	Recommended Value 1.0-1.4 (Recommended Value 10-14)			1.5 (15)	N·m (kgf·cm)
	Mass	Typical Value			1100	g

### ■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
$I_{DRM}$	Repetitive Peak Off-State Current, max.	at $V_{DRM}$ , Single phase, half wave, $T_j = 125^\circ C$	150	mA
$I_{RRM}$	Repetitive Peak Reverse Current, max.	at $V_{DRM}$ , Single phase, half wave, $T_j = 125^\circ C$	150	mA
$V_{TM}$	Peak On-State Voltage, max.	$I_T = 1500A$	1.45	V
$I_{GT}$	Gate Trigger Current, max.	$V_D = 6V, I_T = 1A$	200	mA
$V_{GT}$	Gate Trigger Voltage, max.	$V_D = 6V, I_T = 1A$	3	V
$V_{GD}$	Non-Trigger Gate, Voltage, min.	$T_j = 125^\circ C, V_D = 1/2 V_{DRM}$	0.25	V
$dv/dt$	Critical Rate of Rise of Off-State Voltage, min.	$T_j = 125^\circ C, V_D = 2/3 V_{DRM}$ , exp, waveform	500	V/ $\mu$ s
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case	0.085	°C/W

