


SC3316F

SMD POWER INDUCTORS

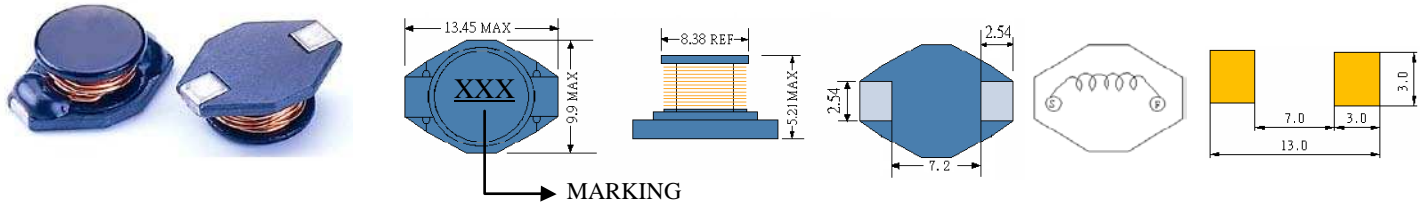



• Features

1. Open frame construction
2. Excellent Power Density
3. Engineered to Provide High Efficiency

ELECTRICAL CHARACTERISTICS



Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (A) (3)	Temperature Current (A) (4)
SC3316F-1R0	1.0	100KHZ	9m	9.0	9.80
SC3316F-1R5	1.5	100KHZ	10m	8.0	9.20
SC3316F-2R2	2.2	100KHZ	13m	7.0	7.00
SC3316F 3R3	3.3	100KHZ	15m	6.4	6.50
SC3316F-4R7	4.7	100KHZ	18m	5.4	5.60
SC3316F-6R8	6.8	100KHZ	27m	4.6	4.50
SC3316F-100	10	100KHZ	38m	3.8	3.90
SC3316F-150	15	100KHZ	56m	3.0	3.10
SC3316F-220	22	100KHZ	85m	2.6	2.70
SC3316F-330	33	100KHZ	0.10	2.0	2.10
SC3316F-470	47	100KHZ	0.16	1.6	1.80
SC3316F-680	68	100KHZ	0.22	1.4	1.50
SC3316F-101	100	100KHZ	0.28	1.2	1.30
SC3316F-151	150	100KHZ	0.40	1.0	1.00
SC3316F-221	220	100KHZ	0.61	0.8	0.80
SC3316F-331	330	100KHZ	1.02	0.6	0.68
SC3316F-471	470	100KHZ	1.27	0.5	0.60
SC3316F-681	680	100KHZ	2.20	0.4	0.42
SC3316F-102	1000	100KHZ	3.00	0.3	0.34

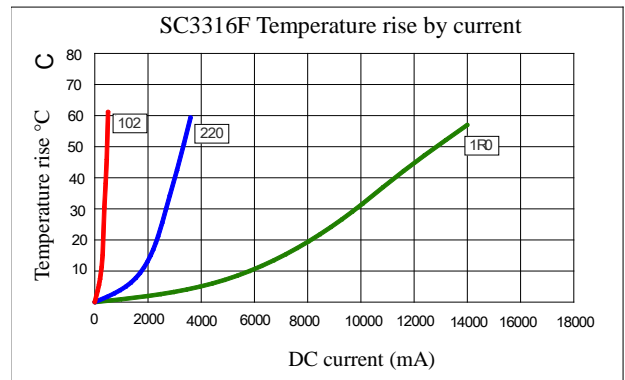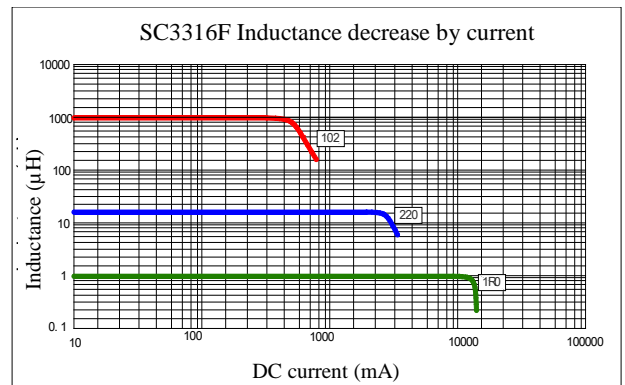

(1). Inductance tolerance for 1.0uH~3.3uH: $\pm 30\%$, for 4.7uH~1000uH: $\pm 20\%$. Tested at 0.25V, 0ADC and 25°C.

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 10% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.