


SCRHB125

SMD POWER INDUCTORS

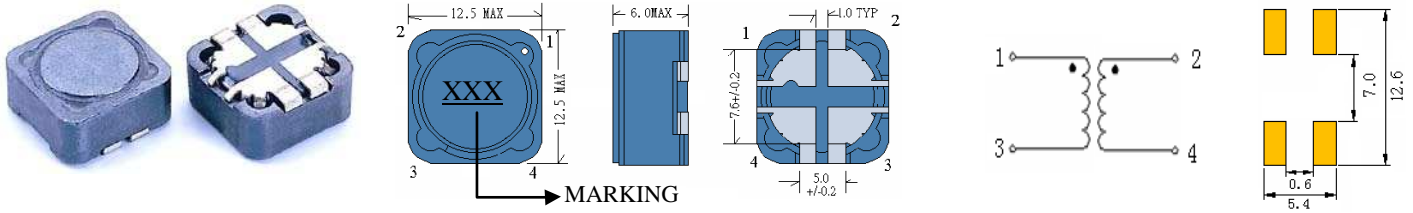



• Features

1. Magnetically shielded construction
2. Excellent Power Density
3. Engineered to Provide High Efficiency



CHARACTERISTICS

Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (A)	Temperature Current (A)	TURN RATIO (L1:L2)
SCRHB125-5622	L1=5.6	1KHZ	24m	5.3	4.90	1:2.2
	L2=25	1KHZ	200m	2.4	2.30	
SCRHB125-6822	L1=6.8	1KHZ	26m	5.0	4.50	1:2.2
	L2=30	1KHZ	220m	2.3	2.00	
SCRHB125-8220	L1=8.2	1KHZ	33m	4.7	4.20	1:2.0
	L2=32	1KHZ	200m	2.2	1.95	
SCRHB125-8222	L1=8.2	1KHZ	33m	4.7	4.20	1:2.2
	L2=39	1KHZ	230m	2.1	1.95	
SCRHB125-1014	L1=10	1KHZ	40m	4.3	4.00	1:1.4
	L2=20	1KHZ	150m	2.9	2.30	
SCRHB125-1016	L1=10	1KHZ	40m	4.3	4.10	1:1.6
	L2=25	1KHZ	180m	2.6	2.00	
SCRHB125-1022	L1=10	1KHZ	40m	4.3	4.10	1:2.2
	L2=45	1KHZ	260m	1.9	1.70	
SCRHB125-1220	L1=12	1KHZ	42m	4.0	4.00	1:2.0
	L2=45	1KHZ	260m	1.9	1.70	

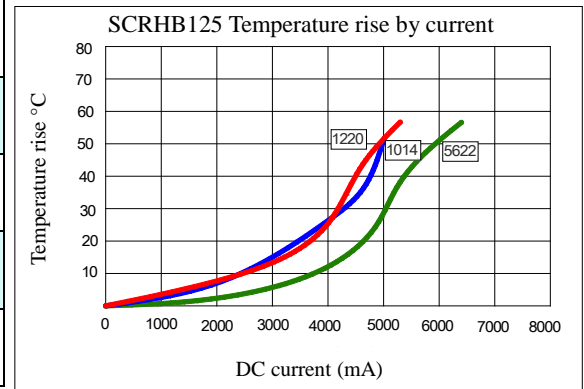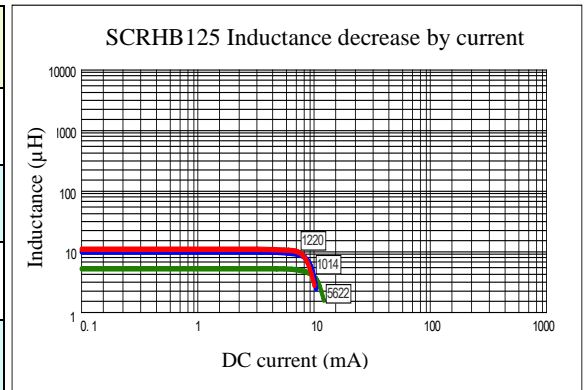

- (1). Inductance tolerance $\pm 20\%$ tested at 0.25V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 25% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.