



### SPECIFICATIONS:

SINGLE PHASE  
 VOLTAGE 240V  
 CURRENT 10A @ 50°C  
 FREQUENCY 50/60Hz  
 ELECTRIC STRENGTH 2121Vdc 1s  
 LEAKAGE CURRENT 1.7mA  
 POWER DISSIPATION 2.47W  
 RESIDUAL 51Vdc @ 1s  
 MATERIAL Aluminium  
 MOUNTING M5x4  
 TERMINALS 6sqmm  
 TERMINAL TORQUE 7lbin (0.8Nm)  
 EARTH M5 STUD  
 MASS 0.64kg  
 TEMPERATURE -25-90°C  
 VIBRATION 10-200Hz 1.8G  
 HUMIDITY 90% RH (Non-condensing)  
 METAL OXIDE VARISTOR  
 L-N / N-E 275V

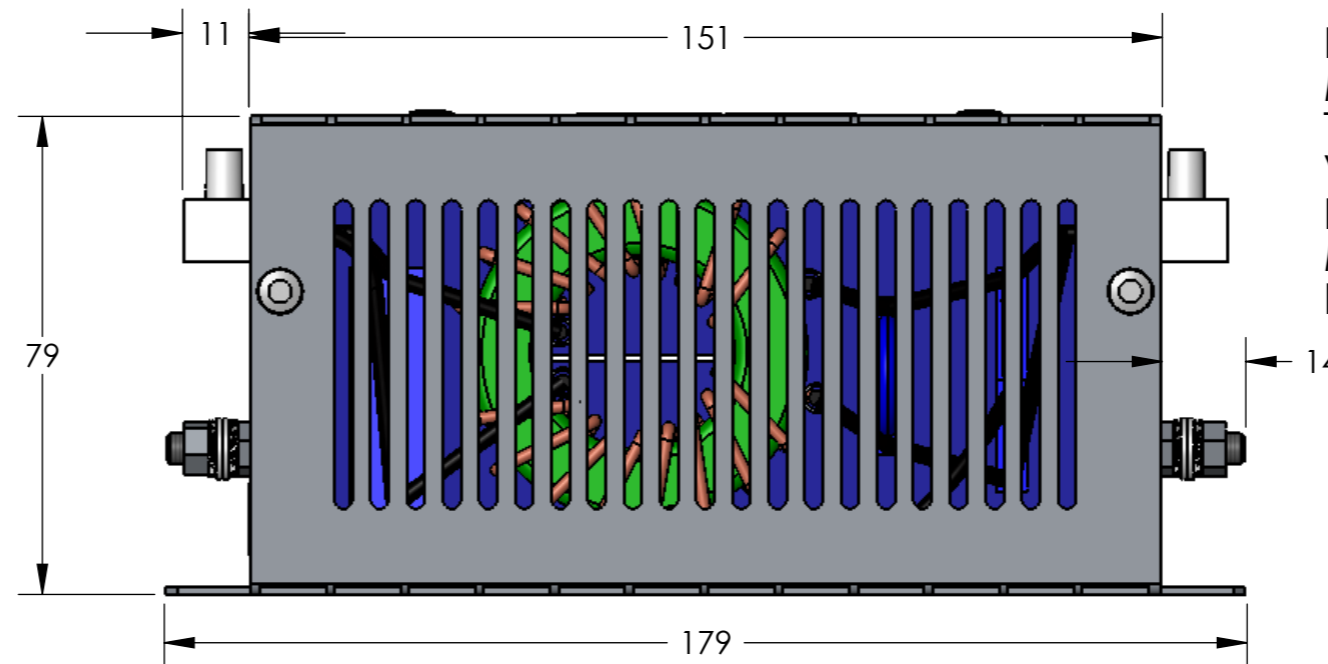

**RoHS**  
**2002/95/EC**  
  
**Compliant**

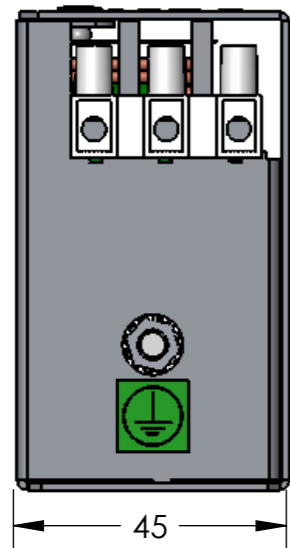