
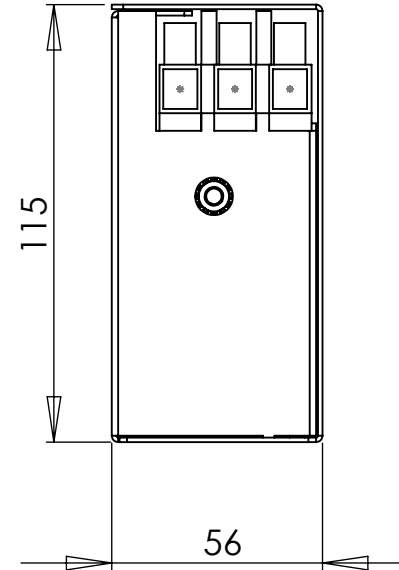
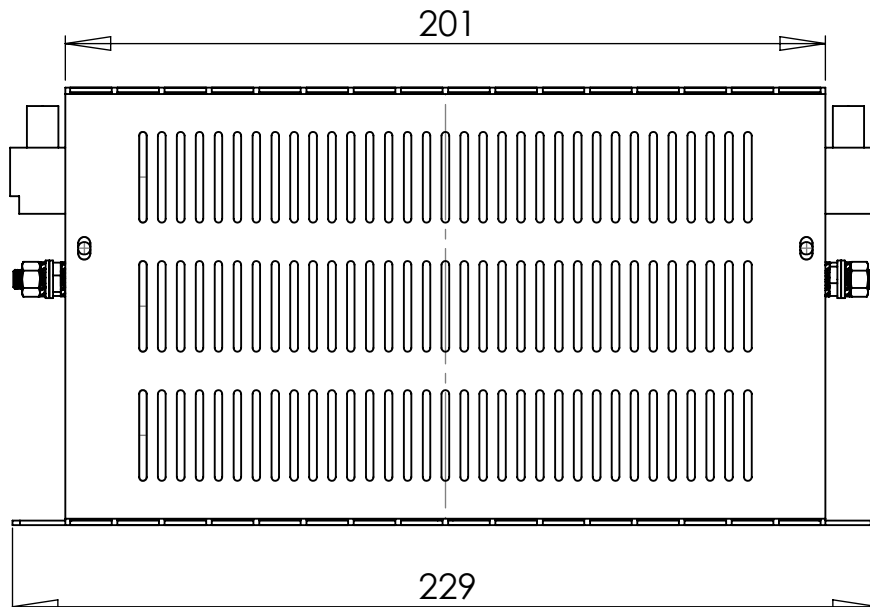



REV.	CNN	CNN DESCRIPTION	Date	Check in
02	-		15/01/2010	Shaun Barron
02	-	border change	19/01/2010	Shaun Barron

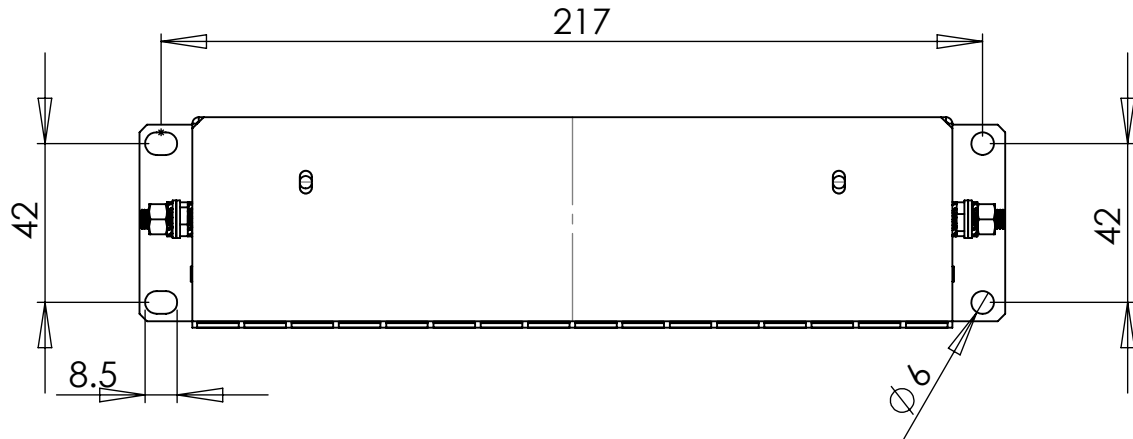

SPECIFICATIONS

VOLTAGE 500Vac
 FREQUENCY 50/60Hz
 CURRENT 18A @ 40°C
 TEMPERATURE -25 TO 100°C
 LEAKAGE CURRENT 37mA @ 500V 50Hz
 HUMIDITY 90% RH (NON-CONDENSING)
 VIBRATION 10-200Hz 1.8G
 ELECTRIC STRENGTH 2250Vac/1min.
 POWER DISSIPATION 11W
 MASS 1.1kg
 TERMINALS 10sqmm TERMINAL BLOCK
 EARTH TERMINALS M5 STUD
 FLANGE MOUNTING 4x M5

RoHS
 2002/95/EC
 Compliant

Tel No. +44(0)1724 273200 Website www.dem-uk.com

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 ALPHA 3 MANUFACTURING.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
 ALPHA 3 MANUFACTURING IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETRES
 LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm
2 DECIMAL PLACES ±0.125mm
 ANGULAR TOLERANCE: ±1°

DEM Manufacturing, Deltron Emcon House
 Hargreaves Way, Sawcliffe Ind. Park,
 Scunthorpe, North Lincolnshire, DN15 8RF, UK



FINISH	STANDARD FILTER	DEBURR AND BREAK SHARP EDGES	DRAWN BY	S BARRON	TITLE	GENERAL SPECIFICATION
			APPROVED BY	SW		3 PHASE 18A 500V INDUSTRIAL FILTER
	IF IN DOUBT ASK DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION	SHEET 1 OF 1	DRAWING NO.	KMF318A
MATERIAL				SCALE 1:2	ISSUE	02
				A4		Release