


MECHANICAL SPECIFICATION

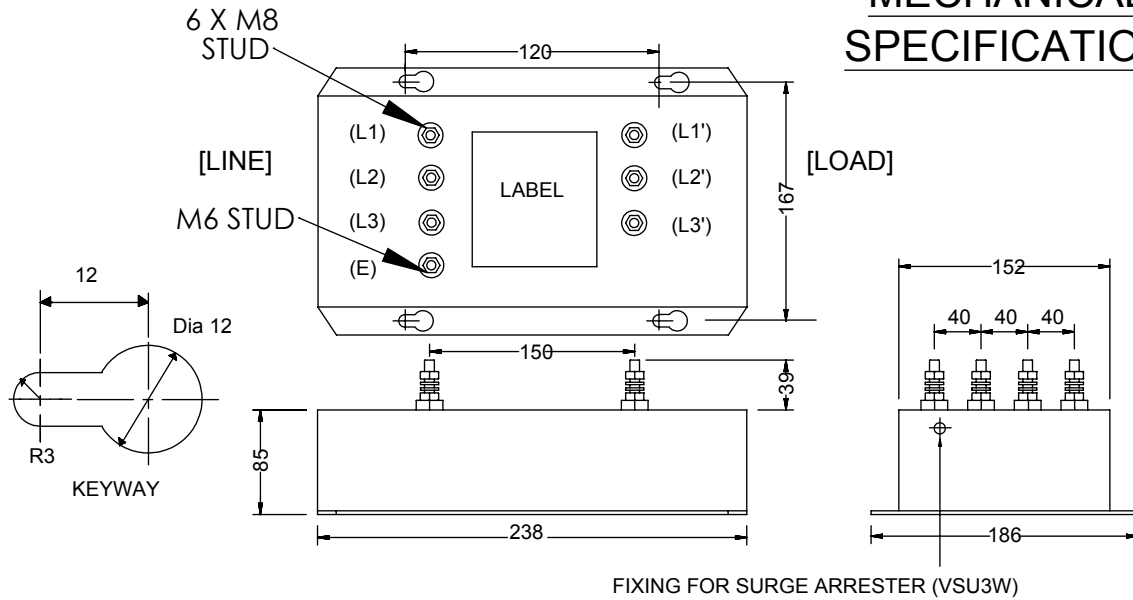

ELECTRICAL SPECIFICATION

RATED VOLTAGE 480V
 LINE FREQUENCY 50/60Hz
 TEMPERATURE RANGE -25 to 85 °C
 TEST VOLTAGE 2.0KV DC
 LEAKAGE CURRENT 163mA AT 250V 50Hz
 WEIGHT 6.35kg

PRODUCT RANGE

TYPE	CURRENT I(RMS) @40°C	INDUCTANCE (L)	RESISTANCE (R) PER WINDING	MINIMUM INSERTION LOSS AT 150 KHz	
				COMMON MODE	DIFFERENTIAL MODE
MDF370	70A	1.10 mH	2.1 mR	79dB	27dB
MDF3100	100A	0.71 mH	1.7 mR	75dB	23dB

RoHS
 2002/95/EC
 Compliant