

**Features**

- Rated voltage 250VAC, compact size.


**Applications**

- Suppressing noise occurring world wide Automatic machines and Office appliances.



Safety Agency : Standard		File No.
UL	: UL-1414	E47474
CSA	: CSA C22.2 No.0, No.1	LR37404, LR68886
VDE	: IEC60384-14 II , EN132400	126833, 126432
SEV	: "	Nr.99.5 50354,01
SEMKO	: "	9805093/02, 9821094/02
NEMKO	: "	P98101548, P98101872
FIMKO	: "	F111185
DEMKO	: "	307778, 307865

**Dimensions**

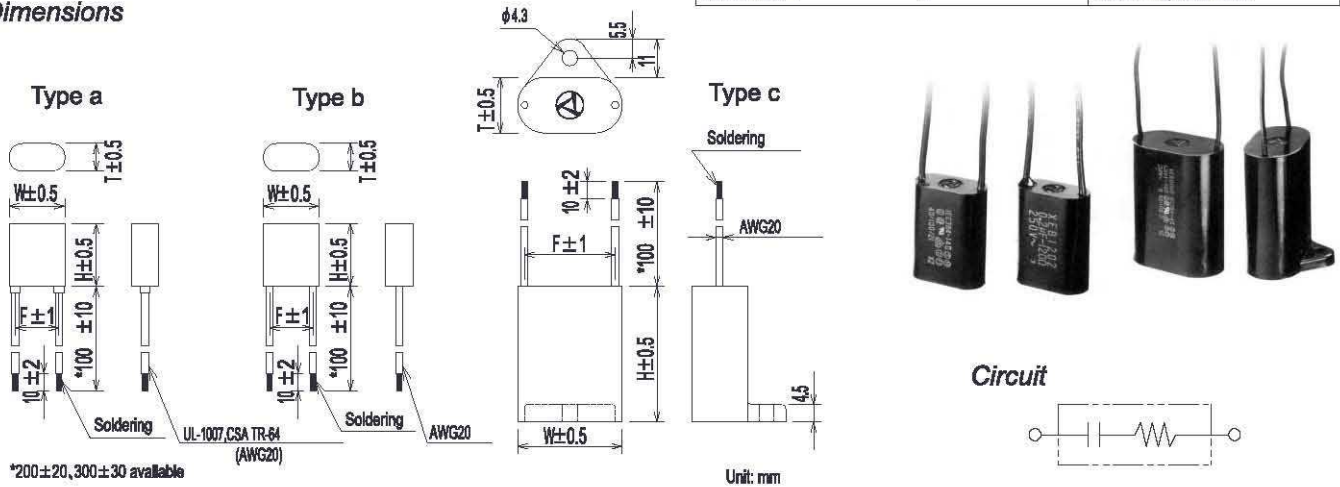

\*200±20, 300±30 available

Unit: mm

Circuit

**Electrical Specifications**

Rated Voltage **250VAC**

Safety Agency	Class	Model Number	Capacitance $\mu\text{F} \pm 20\%$	Resistance $\Omega \pm 30\%$	Type	Dimensions				Pulse condition (Max.)				Peak Pulse Voltage	Test Voltage	Insulation Resistance
						W	H	T	F	Peak to peak	Pulse width	Repetitive frequency	Pulse width (sec) x Frequency (Hz) max.			
	X 2	XEB01001	0.01	10(1/4W)	a	16.0	20.0	8.0	12.5	800V max.	50msec max.	120Hz max.	1200V max.	Line to Line 1250Vrms 50/60Hz 60sec	Line to Line $15 \times 10^3 \text{M}\Omega$ min. except XEB0105 0475,01010 5000M $\Omega$ min. (500Vdc)	
		XEB04701		47(1/4W)												
		XEB12001		120(1/4W)												
		XEB22001		220(1/4W)												
		XEB47001		470(1/4W)												
		XEB010033		0.033												10(1/4W)
		XEB047033	47(1/4W)													
		XEB120033	120(1/4W)													
		XEB220033	220(1/4W)													
		XEB470033	470(1/4W)													
		XEB0101	0.1		10(1/2W)	b	21.5	28.0	11.0							17.0
		XEB0471		47(1/2W)												
		XEB1201		120(1/2W)												
		XEB2201		220(1/2W)												
		XEB4701		470(1/2W)												
		XEB0102		0.2	10(1/2W)											
		XEB0472	47(1/2W)													
		XEB1202	120(1/2W)													
		XEB2202	220(1/2W)													
		XEB0103	0.3		10( 1W )											
XEB0473	47( 1W )															
XEB1203	120( 1W )															
XEB2203	220( 1W )															
XEB0105	0.5	10( 1W )														
XEB0475		47( 1W )														
XEB01010		1.0	10( 1W )													
XEB01010			1.0													

Operating Temperature: -40~+85°C