

A range of high quality UK manufactured phono plugs made from machined brass with various plating options.


- Centre contact available in hollow tube.
- Ground contact with unique 'T' shape slot for maximum contact area.
- Internal cable clamp for secure cable connection.
- Spring strain relief.
- Colour coded ID rings for easy cable identification.
- Attractive body styling.
- Maximum cable size 5.5mm

Rating -

Rated Current: 5A .

Rated Voltage: 50V

Insulation resistance - 100M Ω at 500 Vdc

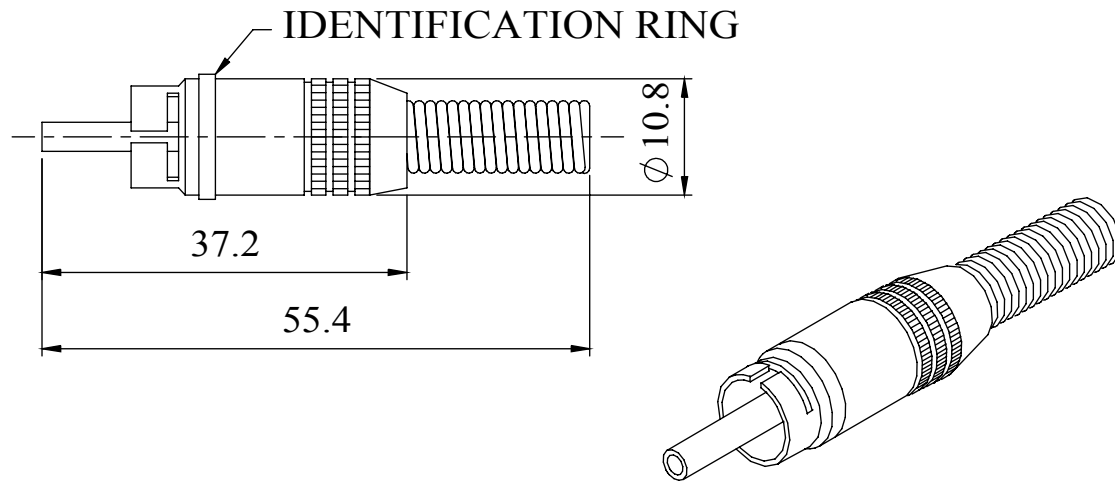

Material

Centre contact :Brass, silver plated

Ground contact :Brass, nickel plated

Insulation :Noryl SE1

Cable clamp :Brass, silver plated

Spring :Spring steel, nickel plated

Cap :Brass, nickel plated

Deltron Part No.	Description
330-0000	NICKEL PLATED
330-0100	NICKEL PLATED (BLACK ID RING)
330-0200	NICKEL PLATED (BLUE ID RING)
330-0500	NICKEL PLATED (RED ID RING)
330-0600	NICKEL PLATED (WHITE ID RING)
330-0700	NICKEL PLATED (YELLOW ID RING)

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 ALPHA 3 MANUFACTURING.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
 ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturing, Deltron Emcon House
 Hargreaves Way, Sawcliffe Ind. Park,
 Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETRES
 LINEAR TOLERANCE:
NO DECIMAL PLACES $\pm 0.5\text{mm}$
1 DECIMAL PLACE $\pm 0.25\text{mm}$
2 DECIMAL PLACES $\pm 0.125\text{mm}$
 ANGULAR TOLERANCE: $\pm 1^\circ$

FINISH -
 DEBURR AND BREAK SHARP EDGES -
 IF IN DOUBT ASK
 DO NOT SCALE DRAWING
 MATERIAL AS SHOWN

DRAWN BY SPB
 APPROVED BY WC
 THIRD ANGLE PROJECTION
 SHEET 1 OF 1
 SCALE 1:1
 A4

TITLE GENERAL SPECIFICATION
 300 SERIES
 THROUGH GROUNDED PHONO PLUG
 DRAWING NO. 330 SERIES
 ISSUE 03
 Release