
A range of high quality UK manufactured phono plugs made from machined brass with various plating options.

- -Centre contact available in hollow tube.
- -Ground contact with unique 'T' shape slot for maximum contact area.
- -Internal cable clamp for secure cable connection.
- -Spring strain relief.
- -Colour coded ID rings for easy cable identification.
- -Attractive body styling.
- -Maximum cable size 5.5mm

Rating –

Rated Current: 5A. Rated Voltage: 50V

Insulation resistance – $100M \Omega$ at 500 Vdc

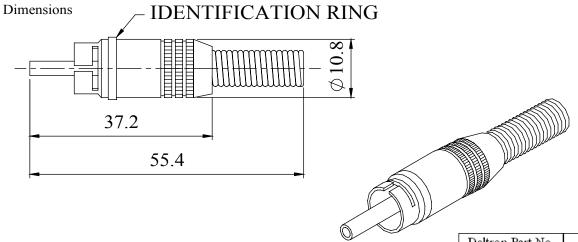

Material

Centre contact :Brass, flash gold plated Ground contact :Brass, flash gold plated

Insulation :Noryl SE1

Cable clamp :Brass, flash gold plated

:Spring steel, black chrome plated Spring

:Brass, black chrome plated Cap

Deltron Part No.	Description
332-0000	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING
332-0100	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (BLACK ID RING)
332-0200	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (BLUE ID RING)
332-0500	FLASH GOLD PLUGASSY/BLACK CHROME CAP & SPRING (RED ID RING)
332-0600	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (WHITE ID RING)
332-0700	FLASH GOLD PLUG ASSY/BLACK CHROME CAP & SPRING (YELLOW ID RING)

A4





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION O

Harareaves Way, Sawcliffe Ind. Park

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: NO DECIMAL PLACES ±0.5mm 1 DECIMAL PLACE ±0.25mm

2 DECIMAL PLACES ±0.125mm

ANGULAR TOLERANCE: +1°

PROFESSIONAL **FINISH** PHONO LINE PLUG IF IN DOUBT ASK DO NOT SCALE DRAWING MATERIAL SEE NOTE

DEBURR AND BREAK | DRAWN BY SHARP EDGES APPROVED BY HIRD ANGLE PROJECTION SHEET 1 OF 1 SCALE 1:1

GENERAL SPECIFICATION 332 SERIES PHONO LINE PLUG

332 SERIES

Release