

REV.	CNN	CNN DESCRIPTION	Date	Check in
03	2753	SHOW PIN AS SOLID	09/02/2010	Shaun Barron
04	2753	SHOW PIN AS SOLID	29/09/2010	Shaun Barron

A range of high quality UK manufactured phono plugs made from machined brass with various plating options.

- Centre contact available in hollow tube.
- Ground contact with unique 'T' shape for maximum contact area.
- Internal cable clamp for secure cable connection.
- Spring strain relief.
- Colour coded ID rings for easy cable identification.
- Attractive body styling.
- Maximum cable size 5.5mm

Rating -

Rated Current: 5A .

Rated Voltage: 50V

Insulation resistance - 100M Ω at 500 Vdc

Material

Centre contact :Brass, silver plated



Ground contact :Brass, nickel plated

Insulation :Noryl SE1

Cable clamp :Brass, silver plated

Spring :Spring steel, nickel plated

Cap :Brass, nickel plated

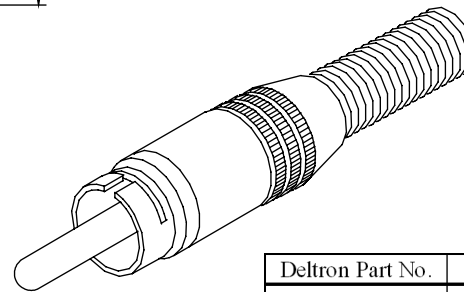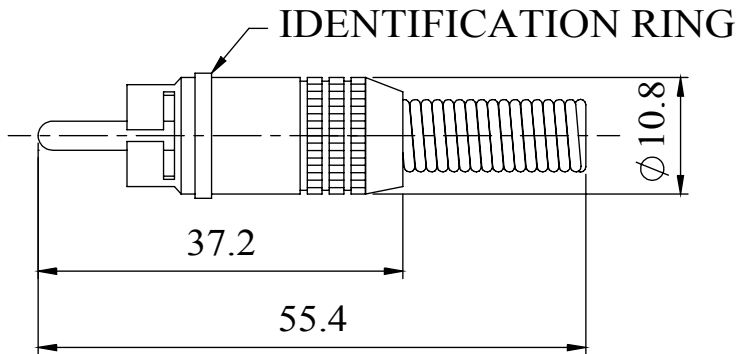

Deltron Part No.	Description
333-0000	NICKEL PLATED
333-0100	NICKEL PLATED (BLACK ID RING)
333-0200	NICKEL PLATED (BLUE ID RING)
333-0500	NICKEL PLATED (BLUE ID RING)
333-0600	NICKEL PLATED (RED ID RING)
333-0700	NICKEL PLATED (YELLOW ID RING)

Tel No. +44(0)1724 273200 Website www.dem-uk.com

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALPHA 3 MANUFACTURING IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES $\pm 0.5\text{mm}$
1 DECIMAL PLACE $\pm 0.25\text{mm}$
2 DECIMAL PLACES $\pm 0.125\text{mm}$
ANGULAR TOLERANCE: $\pm 1^\circ$



DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK



FINISH SEE NOTE

DEBURR AND BREAK SHARP EDGES

DRAWN BY

SPB

APPROVED BY

WC

THIRD ANGLE PROJECTION

SHEET 1 OF 1

SCALE 1:1

A4



TITLE GENERAL SPECIFICATION

333 SERIES
PROFESSIONAL PHONO PLUG

DRAWING NO. 333 SERIES

ISSUE 04

MATERIAL SEE NOTE

Release