A range of high quality UK manufactured phono plugs made from machined brass with various plating options.

-Centre contact available in solid pin.

-Ground contact with unique 'T' shape slot for maximum contact area.
-Internal cable clamp for secure cable connection.

-Spring strain relief.

-Colour coded ID rings for easy cable identification.


-Attractive body styling.

-Maximum cable size 5.5mm

Rating -

Rated Current: 5A. Rated Voltage: 50V

Insulation resistance - 100M Ω at 500 Vdc

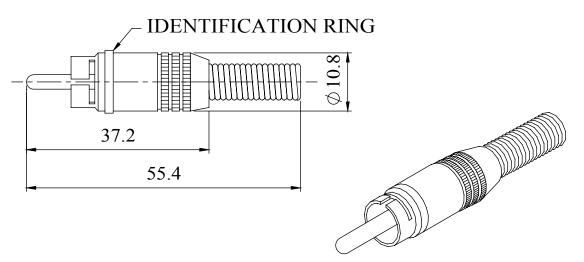

Material

Centre contact :Brass, flash gold plated Ground contact :Brass, flash gold plated

Insulation :Noryl SE1

Cable clamp :Brass, flash gold plated Spring :Spring steel, flash gold plated Cap :Brass, flash gold plated

Deltron Part No.	Description
334-0000	FLASH GOLD PLATED
334-0100	FLASH GOLD PLATED (BLACK ID RING)
334-0200	FLASH GOLD PLATED (BLUE ID RING)
334-0500	FLASH GOLD PLATED (RED ID RING)
334-0600	FLASH GOLD PLATED (WHITE ID RING)
334-0700	FLASH GOLD PLATED (YELLOW ID RING)

Tel No. +44(0)1724 273	200 Website www.dem-uk.com	
	ROXBURGH EMC	
manufacturing	DELTRON Components	
bes Media	DELTRON Enclosures	

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturina, Deltron Emcon House Harareaves Way, Sawcliffe Ind. Park Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: NO DECIMAL PLACES ±0.5mm 1 DECIMAL PLACE ±0.25mm 2 DECIMAL PLACES ±0.125mm

ANGULAR TOLERANCE: +1°

FINISH SEE NOTE IF IN DOUBT ASK DO NOT SCALE DRAWING MATERIAL SEE NOTE

SHARP EDGES

DEBURR AND BREAK DRAWN BY APPROVED BY HIRD ANGLE PROJECTION SHEET 1 OF 1 SCALE 1:1 A4

GENERAL SPECIFICATION 334 SERIES PROFESSIONĂL PHONO LINE PLUG 04 334 SERIES

Release