
A range of leads featuring high quality, low noise Gotham microphone cable. The double lap screened cable is ideally suited to studio applications due to its construction, each lap screen being wound in opposite directions. This feature provides unsurpassed noise rejection yet still maintains a high degree of flexibility.

Dimensions



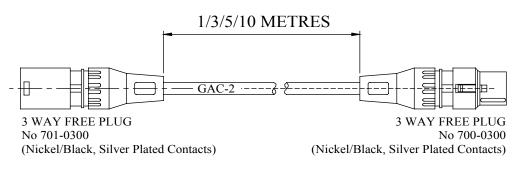

3 way Free Plug as per Product Specification 701-709-705-713

3 way Free Socket as per Product Specification 700-708-704-712

Cable GAC-2 as per Product Specification 439 Series Rated Voltage: 50V

NICKEL	BLACK	LENGTH
730-0010	731-0010	1.0m
730-0030	731-0030	3.0m
730-0050	731-0050	5.0m
730-0100	731-0100	10.0m

Tel No. +44(0)1724 273200 Website www.dem-uk.com **ROXBURGH EMC **ROXBURGH EMC		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APPHA 3 MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF	
bes Mean	DELTRON Enclosures	Hargreaves Way, Sawcliffe Ind. Park, Scunthorpe, North Lincolnshire, DN15 8RF, UK	

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm

2 DECIMAL PLACES ±0.125mm

ANGULAR TOLERANCE: +1°

FINISH PRO	DEBURR AND BRE SHARP EDGES			
IF IN DOUBT ASK				
DO NOT SCALE DRAWING				
MATERIAL	SEE NOTE			

EAK	DRAWN BY	SPB
S	APPROVED BY	WC
	THIRD ANGLE PROJECTION	SHEET 1 OF 1
		SCALE 1:1

A4

GENERAL SPECIFICATION MICROPHONE LEADS 730-731

730-731

ISSUE 07
Release