



# SB2020CT SERIES

## SCHOTTKY BARRIER RECTIFIERS

**VOLTAGE** 20 to 60 Volts **CURRENT** 20 Amperes

**TO-220AB**


Unit : inch(mm)

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: TO-220AB Molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Standard packaging: Any
- Weight: 0.065 ounces, 1.859grams.

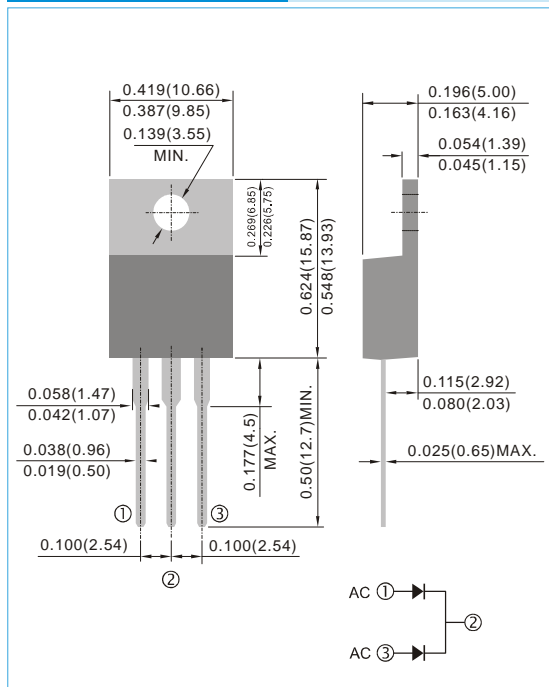

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SB2020CT	SB2030CT	SB2040CT	SB2045CT	SB2050CT	SB2060CT	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	45	50	60	V
Maximum RMS Voltage	$V_{RMS}$	14	21	28	31	35	42	V
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	45	50	60	V
Maximum Average Forward Current at $T_c = 75^\circ C$	$I_{F(AV)}$	20.0						A
Peak Forward Surge Current :8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	200						A
Maximum Forward Voltage at 10A per leg	$V_F$	0.55				0.75		V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J = 25^\circ C$ $T_J = 100^\circ C$	$I_R$	0.2				50		mA
Typical Thermal Resistance	$R_{\theta JC}$	2						$^\circ C / W$
Operating Junction Temperature Range	$T_J$	-55 to +125			-55 to +150			$^\circ C$
Storage Temperature Range	$T_{STG}$	-55 to +150						$^\circ C$

Note:

Both Bonding and Chip structure are available.



# SB2020CT SERIES

## RATING AND CHARACTERISTIC CURVES

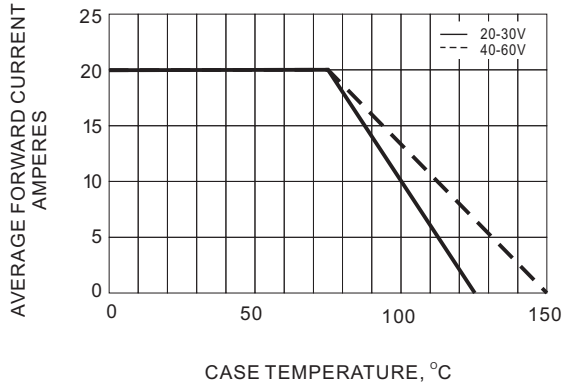


Fig. 1- FORWARD CURRENT DERATING CURVE

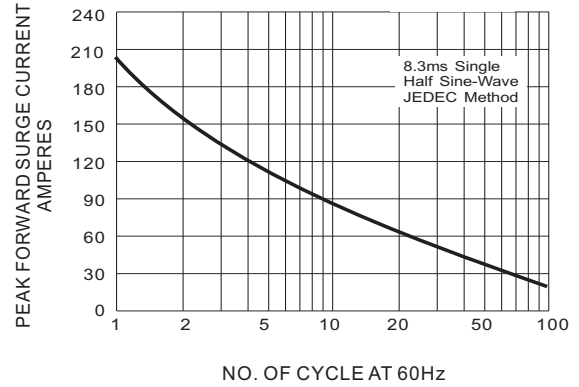


Fig. 2- MAXIMUM NON-REPETITIVE SURGE CURRENT

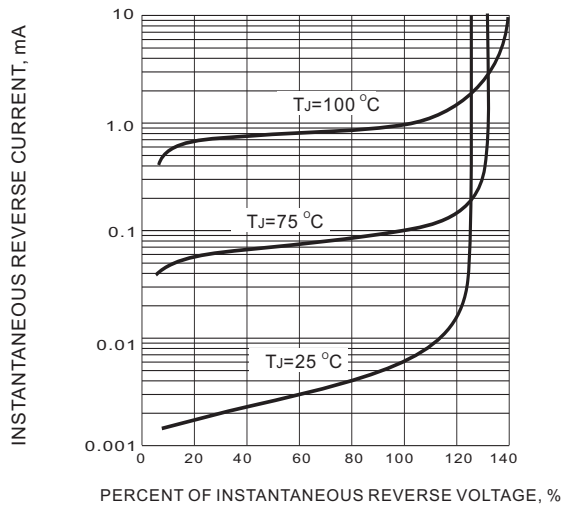


Fig. 3- TYPICAL REVERSE CHARACTERISTIC

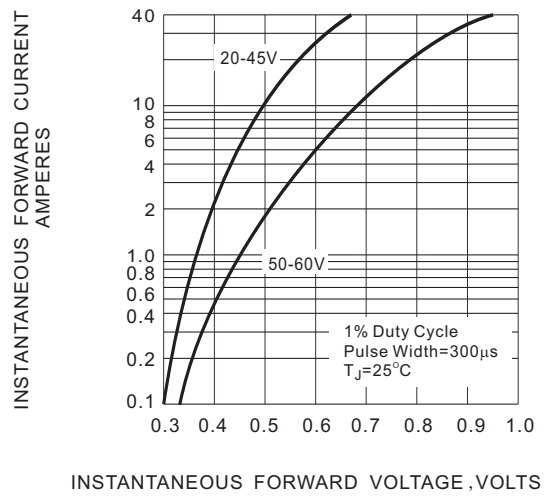


Fig. 4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC