


ROBINAIR VacuMaster™ High Performance Vacuum Pump

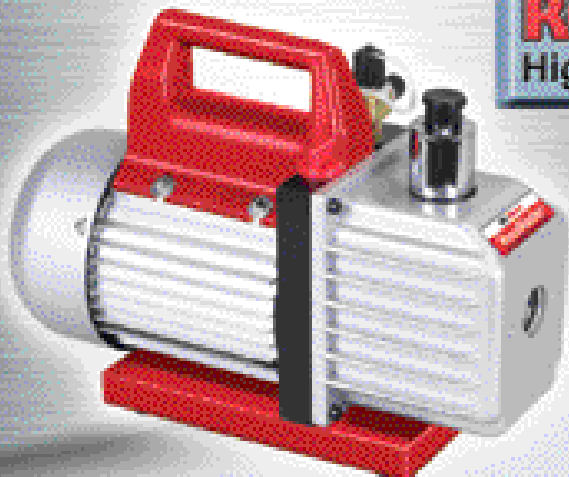

NEW

Features and Benefits

- **HVAC High Performance Vacuum Pump** - Engineered specifically for air conditioning and refrigeration service
- **Perfect Match** - A choice of 1.5, 3 or 5 CFM (40, 71 or 113 Lpm) vacuum pumps for all kind of applications; please see recommended chart guide for your optimize pump

Typical application	Model	Pump size
Small Appliance (Systems up to 10 tons)	15150 (15151)	1.5 CFM (35 Lpm)
Residential A/C (Systems up to 30 tons)	15300 (15301)	3 CFM (71 Lpm)
Commercial Refrigeration (Systems up to 50 tons)	15500 (15501)	5 CFM (118 Lpm)

- **High Vacuum Rating** - The two-stage, offset rotary vane design provides powerful, quiet high vacuum capability and assures moisture removal, while the high pumping capacity reduces evacuation time
- **Lifetime Filtration** - The intake filter prevents foreign matter from entering the pumping chamber, and an internal exhaust filter separates oil vapor from the exhaust flow
- **Compact Design & Lightweight** - Reduced dimensions - just 13" long; die-cast aluminum housing; high torque motor; molded board; making it easy to carry
- **Safety operation** - Precision one-piece, molded handle makes it easy to carry the pump to and from job sites, and the handle stays cool to the touch during operation
- **Lower maintenance** - VacuMaster pumps use less oil, 7.4 oz. (220 ml); that will reflect in your maintenance costs during the life of the pump
- **Unbeatable price** - High performance and quality for an incredible value. See your nearest distributor and check this ROBINAIR product and the whole HVAC/Electrical product line from TIF, Robinair, PROMAX and Amprobe
- **Warranty** - One Year

ROBINAIR


VacuMaster

www.RobinairHVAC.com

ROBINAIR VacuMaster™

High Performance Vacuum Pump

	15150	15300	15500
Voltage	110V,60Hz	110V,60Hz	110V,60Hz
Free Air Displacement	1.5 CFM	3 CFM	5 CFM
Ultimate Vacuum	50 microns	40 microns	40 microns
Stages	2	2	2
Motor	1/4 HP	1/3 HP	1/3 HP
Intake Ports	1/4 & 3/8 Flare	1/4 & 3/8 Flare	1/4 & 3/8 Flare
Oil Capacity	7.4 oz	7.4 oz	7.4 oz
Power Cord Length	6 ft	6 ft	6 ft
Dimensions (in.)	9.5 H x 4.5 W x 12.5 L	10 H x 5 W x 13 L	10 H x 5 W x 13 L
Net Weight	21 lbs	28 lbs	28 lbs
	15151 / 15155	15301 / 15355	15501 / 15505
Voltage	220V,50Hz / 220V,60Hz	220V,50Hz / 220V,60Hz	220V,50Hz / 220V,60Hz
Free Air Displacement	35 Lpm / 1.5 CFM	71 Lpm / 3CFM	118 Lpm / 5 CFM
Ultimate Vacuum	50 microns	40 microns	40 microns
Stages	2	2	2
Motor	1/4 HP	1/3 HP	1/3 HP
Intake Ports	1/4 & 3/8 Flare	1/4 & 3/8 Flare	1/4 & 3/8 Flare
Oil Capacity	220 ml	220 ml	220 ml
Power Cord Length	1.82 m	1.82 m	1.82 m
Dimensions (mm)	240 H x 120 W x 315 L	255 H x 123 W x 385 L	255 H x 123 W x 385 L
Net Weight	9.6 kg	12.5 kg	12.5kg

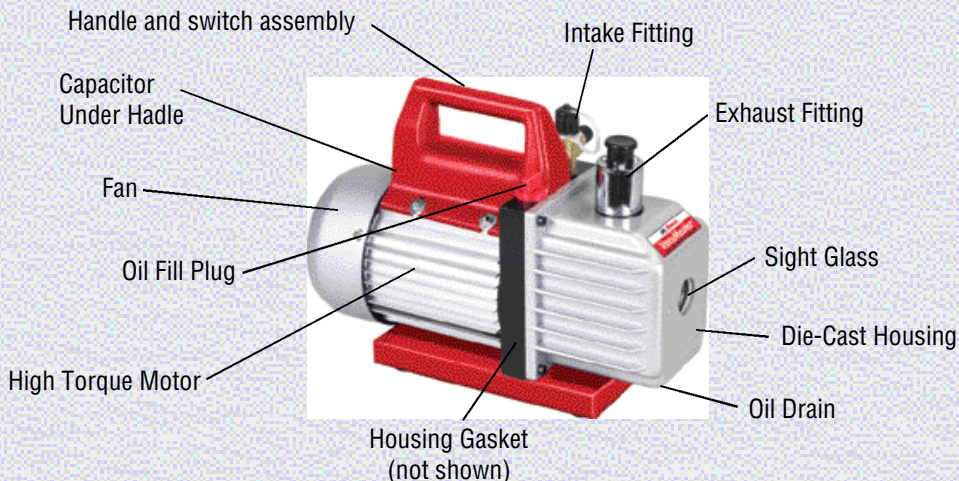

SPX

ROBINAIR

Miramar, FL

Phone:954-499-5400 • Toll Free:1-800-327-5060 • Fax:954-499-5454 • www.RobinairHVAC.com