



UF800F~UF806F

ULTRAFAST RECOCVEY RECTIFIERS

VOLTAGE 50 to 600 Volts **CURRENT** 8.0 Amperes

FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency
- Low forwrd voltge, high current capability
- High surge capacity
- Ultra fast recovery times, high voltage
- Glass passivation junction
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: ITO-220AC full molded plastic package
- Terminals: Lead solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Standard packaging: Any
- Weight: 0.055 ounces, 1.5615 grams.

ITO-220AC

Unit : inch(mm)

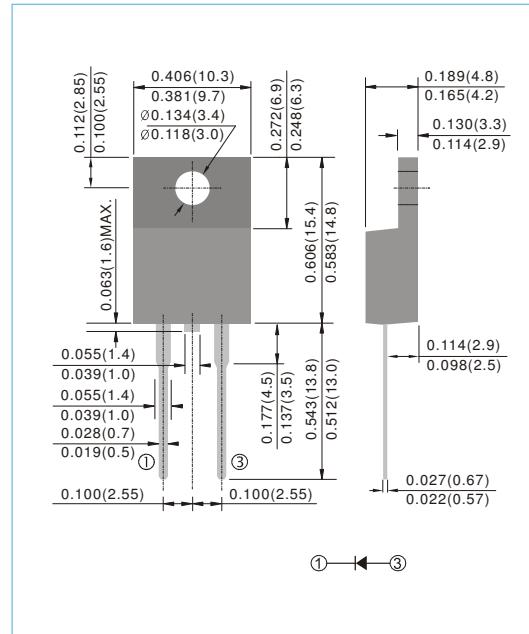

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	UF800F	UF801F	UF802F	UF803F	UF804F	UF806F	UNITS		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	600	V		
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	420	V		
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	600	V		
Maximum Average Forward Rectified Current at $T_c = 100^\circ C$	$I_{F(AV)}$	8.0					A			
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	125					A			
Maximum Forward Voltage at 8.0A	V_F	1.0		1.3		1.7		V		
Maximum DC Reverse Current $T_A = 25^\circ C$ at Rated DC Blocking Voltage $T_A = 125^\circ C$	I_R	1.0 500					μA			
Maximum Thermal Resistance (Note 2)	R_{thJC}	5					$^\circ C / W$			
Typical Junction Capacitance	C_J	80				50		pF		
Maximum Reverse Recovery Time (Note 1)	t_{rr}	50				100		ns		
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150					$^\circ C$			

NOTES:

- Reverse Recovery Test Conditions: $I_F = .5A$, $I_R = 1A$, $I_{rr} = .25A$.
- Thermal resistance from Junction to ambient and from junction to lead 0.375" (9.5mm) P.C.B mounted.



UF800F~UF806F

RATING AND CHARACTERISTIC CURVES

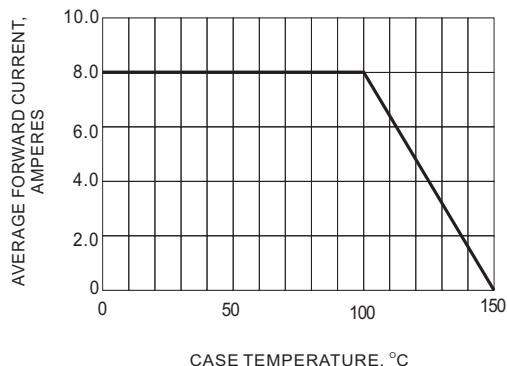


Fig.1 FORWARD CURRENT DERATING CURVE

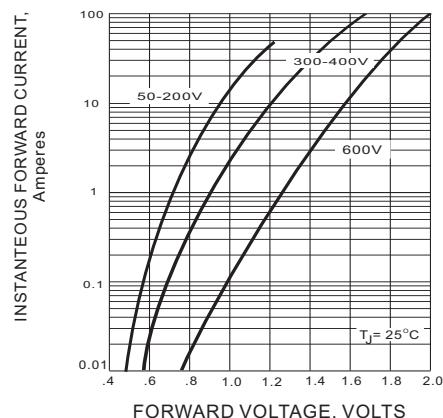


Fig.2 FORWARD CHARACTERISTICS

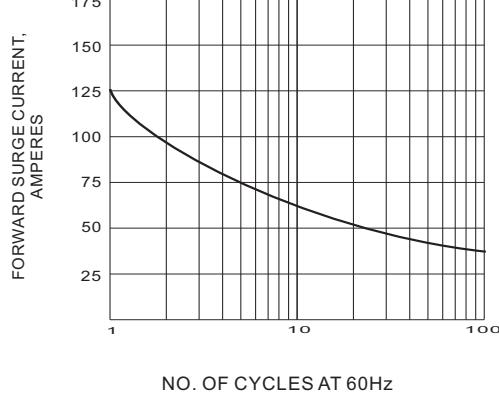


Fig.3 PEAK FORWARD SURGE CURRENT

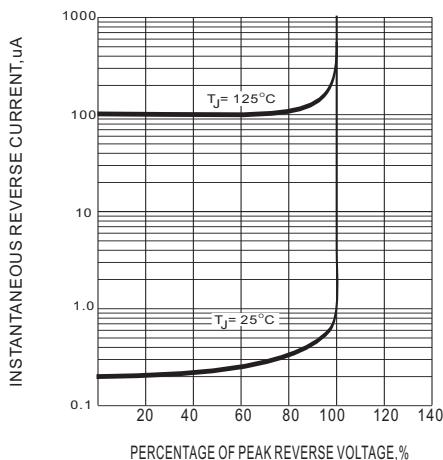


Fig.4 TYPICAL REVERSE CHARACTERISTICS

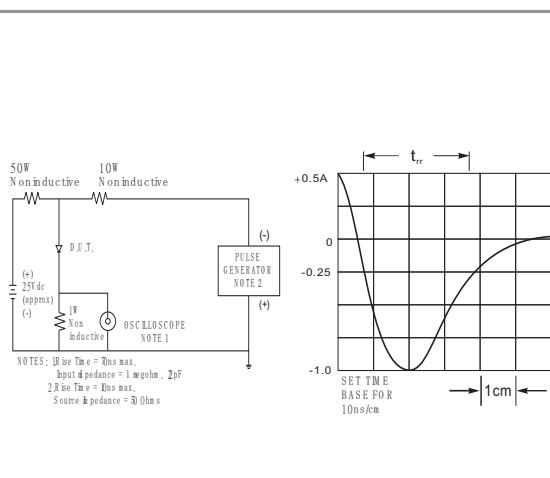


Fig.5 REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

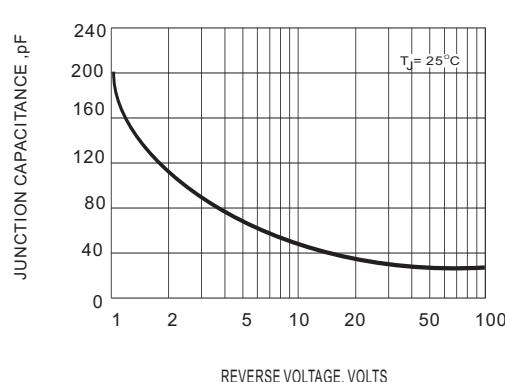


Fig.6 TYPICAL JUNCTION CHARACTERISTICS