

TXV SERIES

125°C Low ESR, Lead Free Reflow Soldering.

◆ **FEATURES**

- Load Life : 125°C 1000~2000 hours Low ESR.
- Lead free reflow soldering is available.
- Available for high density mounting.
- RoHS compliance.




◆ **SPECIFICATIONS**


Items	Characteristics																			
Category Temperature Range	-40~+125°C																			
Rated Voltage Range	10~35V.DC																			
Capacitance Tolerance	±20% (20°C, 120Hz)																			
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2 minutes application of rated voltage) I=(μA) Leakage Current C=(μF) Rated Capacitance V=(V) Rated Voltage																			
(tanδ) Dissipation Factor(MAX)	<table border="1"> <tr> <th>Rated Voltage</th> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th>tanδ</th> <td>0.3</td> <td>0.2</td> <td>0.18</td> <td>0.16</td> </tr> </table> (20°C, 120Hz)		Rated Voltage	10	16	25	35	tanδ	0.3	0.2	0.18	0.16								
Rated Voltage	10	16	25	35																
tanδ	0.3	0.2	0.18	0.16																
Endurance	After applying rated voltage with rated ripple current at conditions stated in the table below at 125°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <th>Capacitance Change</th> <td>Within ±30% of the initial value.</td> <th>Case Size</th> <td>φD=6.3</td> <th>(hrs) LifeTime</th> <td>1000</td> </tr> <tr> <th>Dissipation Factor</th> <td>Not more than 300% of the specified value.</td> <th>φD≥8</th> <td></td> <td></td> <td>2000</td> </tr> <tr> <th>Leakage Current</th> <td>Not more than the specified value.</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		Capacitance Change	Within ±30% of the initial value.	Case Size	φD=6.3	(hrs) LifeTime	1000	Dissipation Factor	Not more than 300% of the specified value.	φD≥8			2000	Leakage Current	Not more than the specified value.				
Capacitance Change	Within ±30% of the initial value.	Case Size	φD=6.3	(hrs) LifeTime	1000															
Dissipation Factor	Not more than 300% of the specified value.	φD≥8			2000															
Leakage Current	Not more than the specified value.																			
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <th>Rated Voltage(V)</th> <td>10</td> <td>16</td> <td>25</td> <td>35</td> </tr> <tr> <th>Z(-40°C)/Z(20°C)</th> <td>6</td> <td>4</td> <td>4</td> <td>3</td> </tr> </table> (120Hz)		Rated Voltage(V)	10	16	25	35	Z(-40°C)/Z(20°C)	6	4	4	3								
Rated Voltage(V)	10	16	25	35																
Z(-40°C)/Z(20°C)	6	4	4	3																

◆ **DIMENSIONS**

(mm)

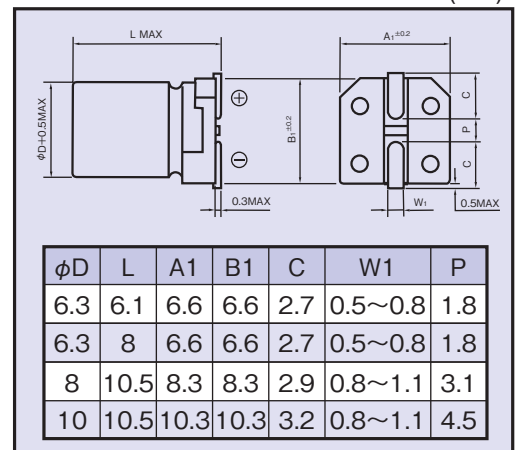

◆ **MARKING**

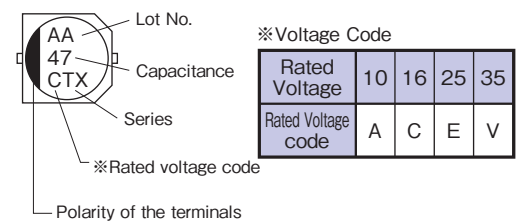

◆ **MULTIPLIER FOR RIPPLE CURRENT**
Frequency Coefficient

(Hz) Frequency	120	1k	10k	100k≤
22~33μF	0.45	0.75	0.90	1.00
47~100μF	0.50	0.80	0.95	1.00
220~470μF	0.60	0.85	0.95	1.00

◆ **STANDARD SIZE** Size φD×L(mm), Ripple Current (mA r.m.s./125°C, 100kHz), ESR(Ω MAX/100kHz)

WV (V.DC)	Cap (μF)	Size (φD×L)	Ripple	ESR	
				20°C	-40°C
10 (1A)	100	6.3×8	140	0.3	5
	220	6.3×8	110	0.7	11
	470	10×10.5	300	0.2	3
16 (1C)	47	6.3×6.1	70	1	15
		6.3×8	140	0.3	5

WV (V.DC)	Cap (μF)	Size (φD×L)	Ripple	ESR	
				20°C	-40°C
25 (1E)	33	6.3×6.1	70	1	15
	47	6.3×8	140	0.3	5
	100	6.3×8	110	0.7	11
		8×10.5	300	0.16	2.5
	220	8×10.5	220	0.3	4.5
		10×10.5	420	0.1	1.5
330	10×10.5	300	0.2	3	

WV (V.DC)	Cap (μF)	Size (φD×L)	Ripple	ESR	
				20°C	-40°C
35 (1V)	22	6.3×6.1	70	1	15
	33	6.3×8	140	0.3	5
	47	6.3×8	110	0.7	11
		8×10.5	300	0.16	2.5
	100	8×10.5	220	0.3	4.5
		10×10.5	420	0.1	1.5
220	10×10.5	300	0.2	3	

◆ **PART NUMBER**

