



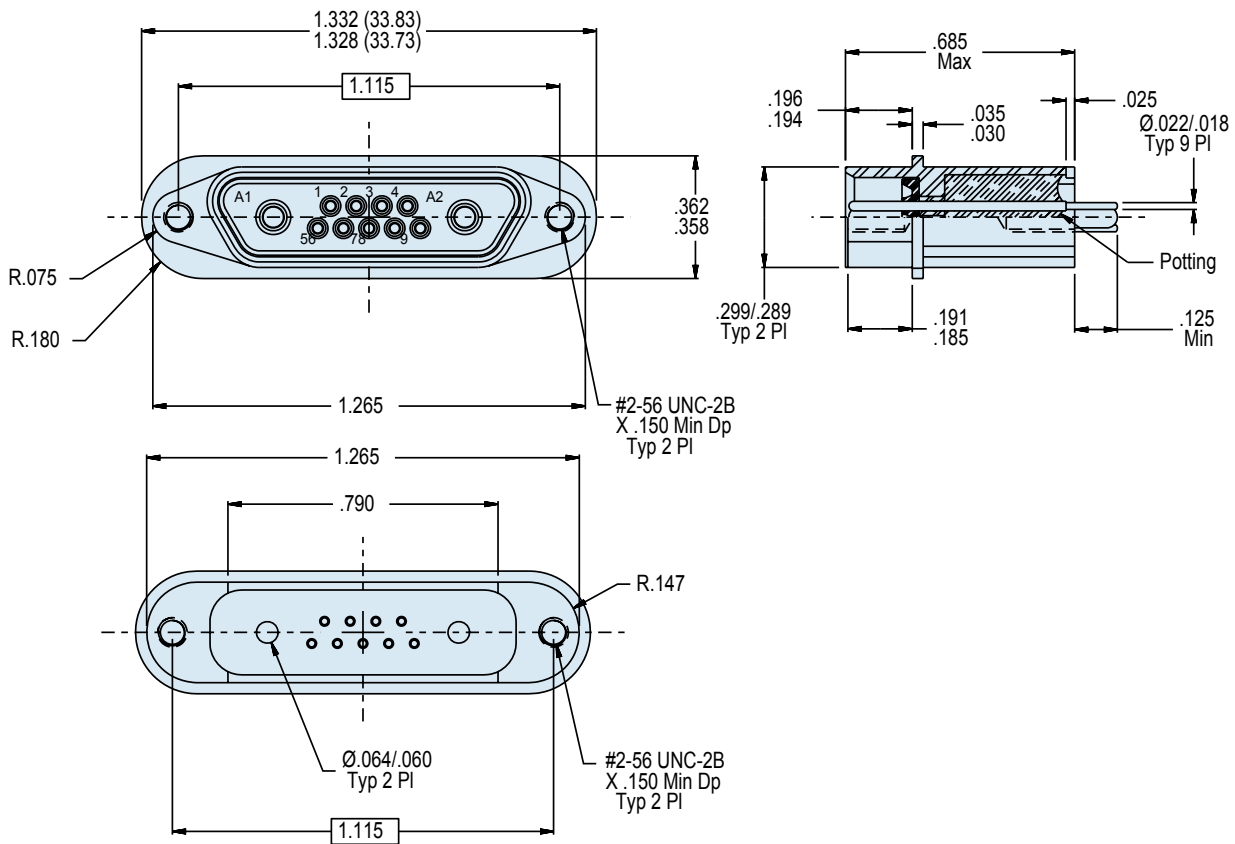

797-077
Series 79 Micro-Crimp Hermetic Receptacle
E-11P2 Arrangement

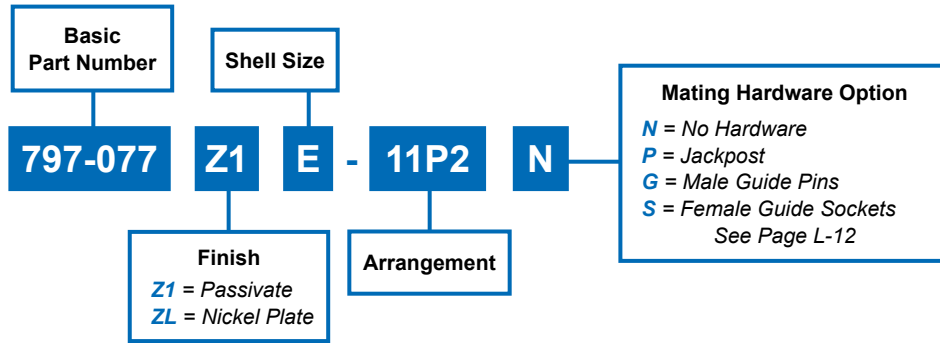

APPLICATION NOTES

- | | |
|---|--|
| <p>1. Material/Finish:
Shell* - 300 Series CRES/passivate or 300 Series CRES/Nickel Plate
Contacts - Nickel iron alloy/gold plate
Insulator - Glass bead/N.A.
Interfacial Seal - Fluorosilicone elastomer/N.A.
Potting - Epoxy/N.A.
*Consult factory for other shell finishes and O-Ring materials.</p> <p>2. Metric dimensions (mm) are indicated in parentheses.</p> | <p>3. Test Criteria:
Hermeticity - $<1 \times 10^{-7}$ scc He/sec @1 ATM Delta DWV - #23 contacts: 500 VAC pin-to-shell
#16 contacts: 1800 VAC pin-to-shell
I.R. - 5,000 megohms minimum @500 VDC</p> <p>4. Glenair 797-077 is designed to intermate with Glenair 790-025SE-11P2 connector.</p> <p>5. Contact style P.C. termination.</p> |
|---|--|