

CR24™

2'x4' Architectural LED Troffer


Product Description

The CR24 Architectural LED High Efficiency (HE) troffer delivers up to 130 lumens per watt of exceptional 90 CRI light at 4000 lumens. This breakthrough performance is achieved by combining the high efficacy and high-quality light of Cree TrueWhite® Technology with a unique thermal management design. The CR24 High Definition (HD) option delivers enhanced spectrum 80+ CRI color quality. The CR24 product family is available in warm, neutral, cool, or daylight color temperatures and has step, 0-10V, or Lutron EcoSystem® Enabled dimming options. Its compact, lightweight design makes the CR24 perfect for use in commercial new construction or renovated spaces.

Performance Summary

Utilizes Cree TrueWhite® Technology
Active Color Management
Room-Side Heat Sink
Assembled in the US & Mexico
Efficacy: 90-130 LPW
Delivered Light Output: 2200, 3100, 4000, 5000 lumens
Input Power: 22-50 watts
CRI: 80-90
CCT: 3000K, 3500K, 4000K, 5000K
Input Voltage: 120-277 VAC
Warranty: 10 years
Lifetime: Designed to last from 50,000 hours up to 100,000 hours with HE Option
Controls: Step Level to 50%, 0-10V Dimming or Lutron EcoSystem Enabled to 5%
Mounting: Recessed

CR24

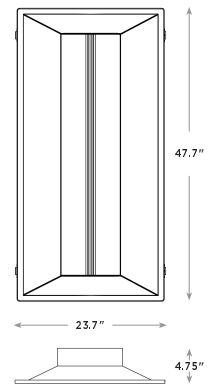

NOTE: Use of Expanded Junction Box will expand the depth to 6.67" and Emergency Backup will expand the depth to 6.30".

Housings & Accessories

Accessories

CPLCR Chicago Plenum Field Kit	CR-347V 347 Volt	PW-18/4-06-9T/SS-CR Power Whip	AC5-72-PD8-JB Adjustable Cable
CPLCR-EM Chicago Plenum Field Kit-Emergency	CR-347V-SD Step Dimming to 50%	AC5-18/4-72-PD8-JB Adjustable Cable	EJBKR-5PK Expanded size junction box for through wiring (5 pack)
	SMK-24 Surface Mount Kit		

Ordering Information

Example: CR24-40L-35K-S

CR24	Lumen Output		Color Temp	Voltage	Control	Options			
CR24	22L 22W	2200 lumens - 100 LPW	30K 3000 Kelvin	Blank 120-277 Volt (Standard)	S Step Dimming to 50%	HD⁶ High Definition Color - CRI 80+ (44W 4000 lumens - 90 LPW)			
	31L 34W	3100 lumens - 90 LPW	35K 3500 Kelvin						
	40L 40W	4000 lumens - 100 LPW	40K 4000 Kelvin						
	40L HE 30.5W	4000 lumens - 130 LPW (30K)	50K 5000 Kelvin						
	32W	4000 lumens - 125 LPW (35K)							
	33W	4000 lumens - 120 LPW (40K)							
	34.5W	4000 lumens - 115 LPW (50K)							
	50L 50W	5000 lumens - 100 LPW							
								10V 0-10V Dimming to 5%	EB14^{2,4} Emergency Backup - 1400 lumens
								LES Lutron EcoSystem® Enabled to 5%	EB14 SMK^{2,5} Emergency Backup with surface mount kit - 1400 lumens

1. Reference www.cree.com/lighting for recommended dimming control options. 2. Not available with 50L or LES option. 3. Not available with EB14 option. Use EB14 SMK. 4. EB14 not for use with SMK Kits. 5. Includes surface mount kit accessory (SMK-CR24). 6. HD only available in 40L. Suggested MSRP for the adder over the standard CR Series fixture for the Lutron EcoSystem® Enabled feature is \$49. *See www.cree.com/lighting for warranty terms.

US: www.cree.com/lighting T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada T (800) 473-1234 F (800) 890-7507



Product Specifications

CREE TRUEWHITE™ TECHNOLOGY

A revolutionary way to generate high-quality white light, Cree TrueWhite® Technology mixes the light from the highest performing red and unsaturated yellow LEDs. This patented approach delivers an exclusive combination of 90+ CRI, beautiful light characteristics, and lifelong color consistency, all while maintaining high luminous efficacy—a true no compromise solution.

ROOM-SIDE HEAT SINK

An innovative thermal management system designed to maximize cooling effectiveness by integrating a unique room-side heat sink into the diffusing lens. This breakthrough design creates a pleasing architectural aesthetic while conducting heat away from LEDs in a temperature-controlled environment. This enables the LEDs to consistently run cooler, providing significant boosts to lifetime, efficacy, and color consistency.

LUMEN MAINTENANCE FACTORS

- Reference www.cree.com/lighting for detailed lumen maintenance factors.

CONSTRUCTION & MATERIALS

- Durable 20-gauge steel housing with standard troffer access plate for electrical installation.
- Field replaceable light engine integrates LEDs, driver, power supply, thermal management, and optical mixing components.
- One-piece lower reflector finished with a textured high reflectance white polyester powder coating creates a comfortable visual transition from the lens to the ceiling plane.
- Provided t-bar clips and holes for mounting support wires enable recessed or suspended installation.
- Individual fixtures may be mounted end to end for a continuous row of illumination.

NOTE: Reference www.cree.com/lighting for detailed instructions on field replacement of the light engine.

OPTICAL SYSTEM

- Unique combination of reflective and refractive optical components achieves a uniform, comfortable appearance while eliminating pixelation and color fringing.
- Components work together to optimize distribution, balancing the delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces. This increases the perception of spaciousness.
- Diffusing lens integrated with upward-facing LED strip eliminates direct view of LEDs while lower reflector balances brightness of lens with the ceiling to create a low-glare high angle appearance.

ELECTRICAL SYSTEM

- Integral, high-efficiency driver and power supply.
- **Power Factor** = 0.9 nominal
- **Input Power:** Stays constant over life.
- **Input Voltage:** 120V-277V, 50/60Hz
- **Battery Backup:** Consult factory.
- **Temperature Rating:** Designed to operate in temperatures 0-35 C and below room side and plenum side.
- **Total Harmonic Distortion:** < 20%

CONTROLS

- Step dimming to 50% comes standard.*
- Optional continuous dimming to 5% with 0-10V DC control protocol.*
- Optional Lutron EcoSystem® Enabled option allows seamless integration with Lutron EcoSystem controls.*

REGULATORY & VOLUNTARY QUALIFICATIONS

- UL924 (EB14 option).
- cULus Listed.
- DLC qualified.**
- Suitable for damp locations.
- Designed for Indoor use.


*Reference www.cree.com/lighting for recommended dimming controls and wiring diagrams.
**Does not apply to -LES models.

© 2013 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. See www.cree.com/patents for patents that cover these products. Cree®, the Cree logo, Cree TrueWhite®, TrueWhite® and the Cree TrueWhite® Technology logo are registered trademarks and CR24™ is a trademark of Cree, Inc. or one of its subsidiaries. Lutron®, Lutron EcoSystem®, EcoSystem®, and the Lutron EcoSystem Enabled logo are registered trademarks of Lutron, Inc.

Photometry

CR24-4000L BASED ON LTL REPORT TEST #: 22421

Fixture photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%.

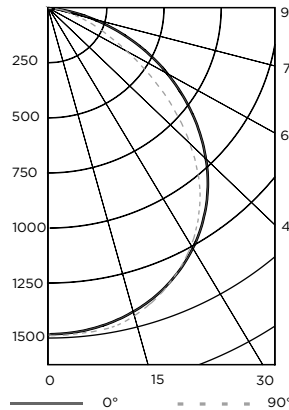

Average Luminance Table (cd/m²)

		Horizontal Angle		
		0°	45°	90°
Vertical Angle	0°	2174	2174	2174
	45°	1976	2116	2152
	55°	1807	2018	2074
	65°	1553	1889	1879
	75°	1149	1501	1119
	85°	424	62	62

Coefficients Of Utilization

RCC %:	80			
RW %:	70	50	30	0
RCR: 0	119	119	119	119
1	109	105	101	97
2	100	92	85	79
3	91	80	72	66
4	83	71	63	56
5	76	64	55	48
6	71	57	48	42
7	65	52	43	37
8	61	47	39	33
9	57	43	35	30
10	53	40	32	27

Effective Floor Cavity Reflectance: 20%

Zonal Lumen Summary

Zone	Lumens	% Lamp	Luminaire
0-30	1,115	27.9%	27.9%
0-40	1,835	45.9%	45.9%
0-60	3,245	81.1%	81.1%
0-90	4,000	100%	100%

Reference www.cree.com/lighting for detailed photometric data.

Application Reference

Open Space					
Spacing	Lumens	Wattage	LPW	w/ft ²	Average fc
8 x 8	2200L	22W	100	0.35	30
	4000L	40W	100	0.69	54
	4000L	30.5W	130	0.56	54
	5000L	50W	100	0.78	68
8 x 10	2200L	22W	100	0.28	25
	4000L	40W	100	0.55	45
	4000L	30.5W	130	0.45	45
	5000L	50W	100	0.62	57
10 x 10	2200L	22W	100	0.22	21
	4000L	40W	100	0.44	38
	4000L	30.5W	130	0.36	38
	5000L	50W	100	0.50	48
10 x 12	2200L	22W	100	0.19	17
	4000L	40W	100	0.37	30
	4000L	30.5W	130	0.30	30
	5000L	50W	100	0.42	38

9' ceiling; 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial. Open Space: 50' x 40' x 10'