

## SINGLE-SUPPLY DUAL OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION

The NJM2143 is a single-supply dual operational amplifier in small packages. It offers a low voltage operation from 3V and low operating current of 0.7mA(typ.).

There is no crossover distortion in single supply operation, because the load is directly coupled to the ground. And in dual supply operation, by connecting a pull-down resistor between output and negative supply V- terminals the crossover distortion can be reduced. The NJM2143 is available in both 8-lead MSOP and thin type MSOP packages.

### ■ PACKAGE OUTLINE



**NJM2143R**  
(MSOP8 (VSP8))




**NJM2143RB1**  
(MSOP8 (TVSP8))

### ■ FEATURES

- Single-Supply Operation
- Operating Voltage                    +3~+20V
- Low Operating Current                0.7mA typ.
- Bipolar Technology
- Package Outline


MSOP8 (VSP8) MEET JEDEC MO-187-DA  
MSOP8 (TVSP8) MEET JEDEC MO-187-DA/THIN TYPE

### ■ PIN CONFIGURATION



- PIN FUNCTION**
- 1.A OUTPUT
  - 2.A -INPUT
  - 3.A +INPUT
  - 4.GND
  - 5.B +INPUT
  - 6.B -INPUT
  - 7.B OUTPUT
  - 8.V<sup>+</sup>

### ■ EQUIVALENT CIRCUIT ( 1/2 Shown )

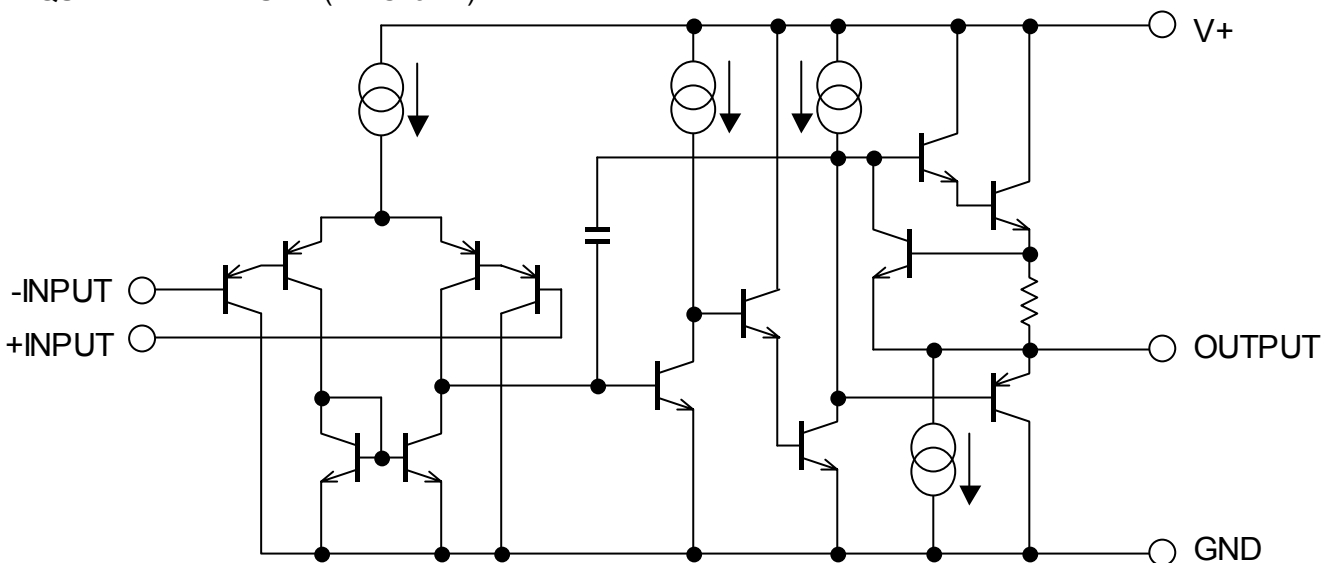

# NJM2143

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+(V^+/V^-)$	20 ( ± 10 )	V
Differential Input Voltage	$V_{ID}$	20	V
Input Voltage	$V_{IC}$	-0.3~+20 ( note1 )	V
Power Dissipation	$P_D$	(MSOP8(VSP/TVSP8)) 320	mW
Operating Temperature Range	$T_{opr}$	-40~+85	°C
Storage Temperature Range	$T_{stg}$	-50~+125	°C

( note1 ) When input voltage is less than +20V, the absolute maximum control voltage is equal to the input voltage.


## ■ ELECTRICAL CHARACTERISTICS

(  $V^+=5.0V, Ta=25°C$  )


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	$V_{IO}$	$R_S=0\Omega$	-	2	7	mV
Input Offset Current	$I_{IO}$		-	5	50	nA
Input Bias Current	$I_B$		-	25	250	nA
Large Signal Voltage Gain	$A_V$	$R_L \geq 2k\Omega$	-	100	-	dB
Maximum Output Voltage Swings	$V_{OM1}$	$R_L=2k\Omega$	3.5	-	-	$V_{P-P}$
Input Common Mode Voltage Range	$V_{ICM}$		0~3.5	-	-	V
Common Mode Rejection Ratio	CMRR		-	85	-	dB
Supply Voltage Rejection Ratio	PSRR		-	100	-	dB
Output Source Current	$I_{SOURCE}$	$V_{IN}^+=1V, V_{IN}^-=0V$	20	30	-	mA
Output Sink Current	$I_{SINK}$	$V_{IN}^+=0V, V_{IN}^-=1V$	8	20	-	mA
Channel Separation	CS		-	120	-	dB
Operating Current	$I_{CC}$		-	0.7	1.2	mA
Slew Rate	SR		-	0.5	-	V/ $\mu$ s
Gain Bandwidth Product	GB		-	0.6	-	MHz

## ■ TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Load Resistance  
( $V^+=5V$ ,  $T_a=25^\circ C$ )

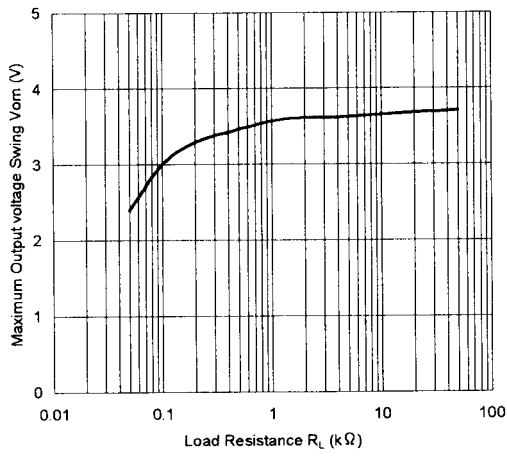


Voltage Gain vs. Frequency

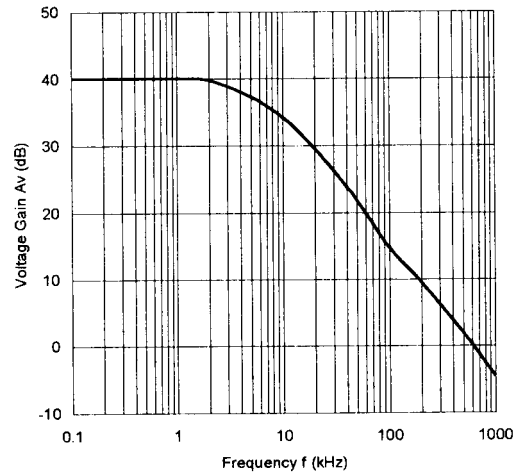


Operating Current vs. Operating Voltage  
( $T_a=25^\circ C$ )

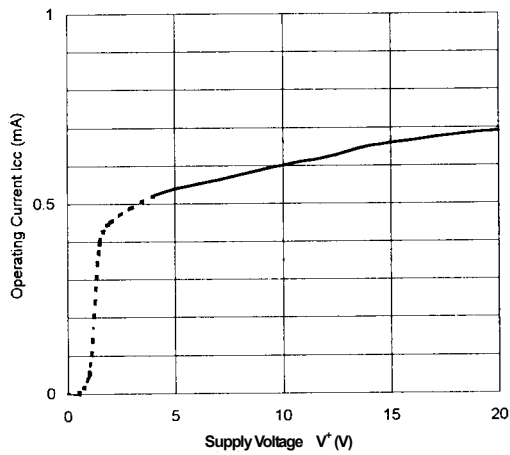






Voltage Gain vs. Operating Voltage

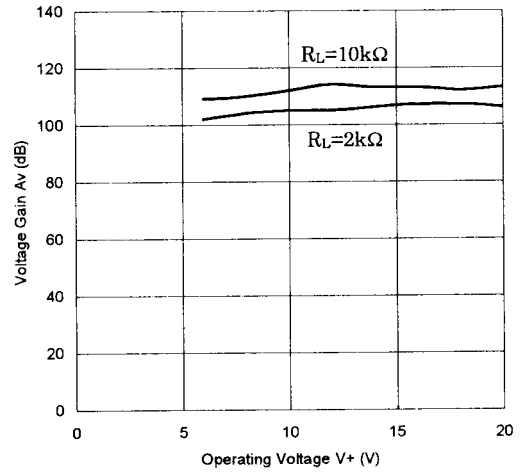



Maximum Output Voltage vs. Operating Voltage  
( $R_L=2k\Omega$ ,  $T_a=25^\circ C$ )

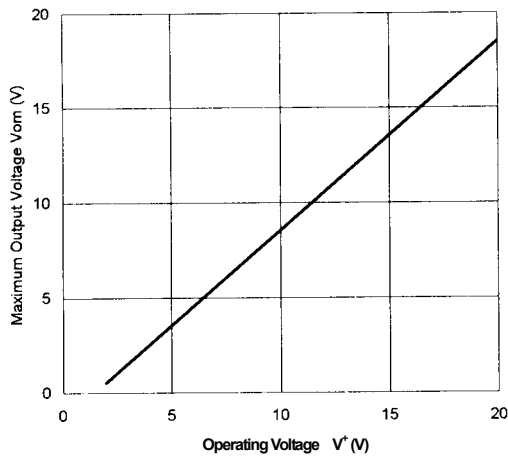

## ■ TYPICAL CHARACTERISTICS

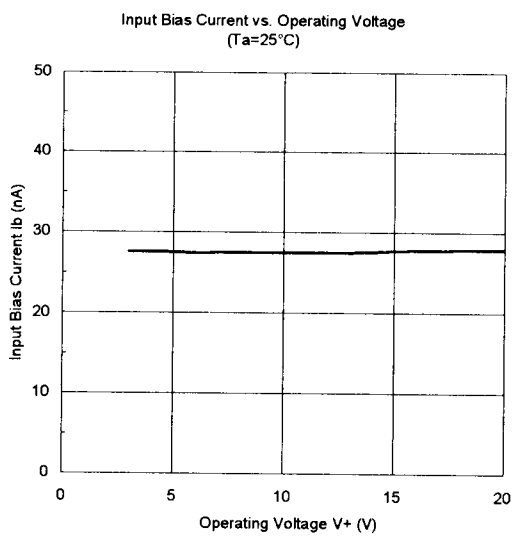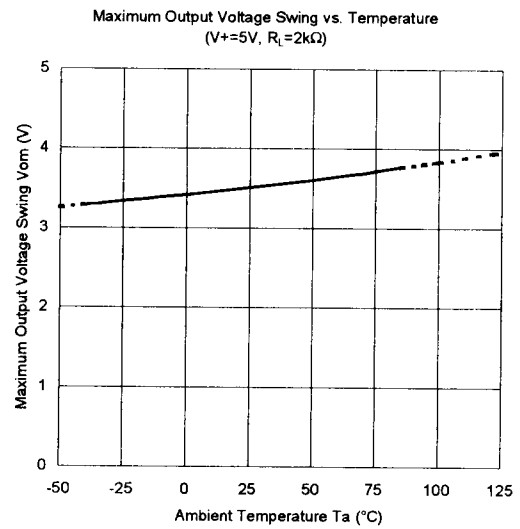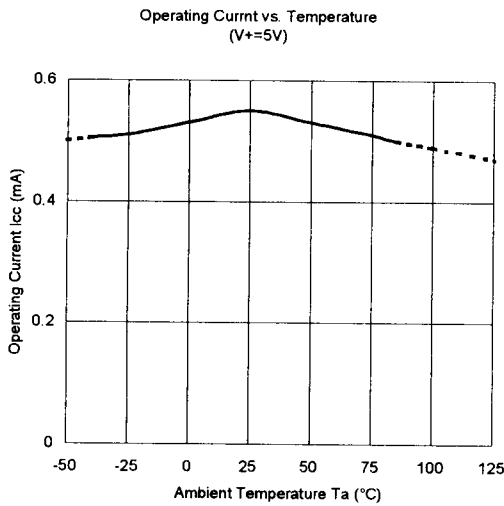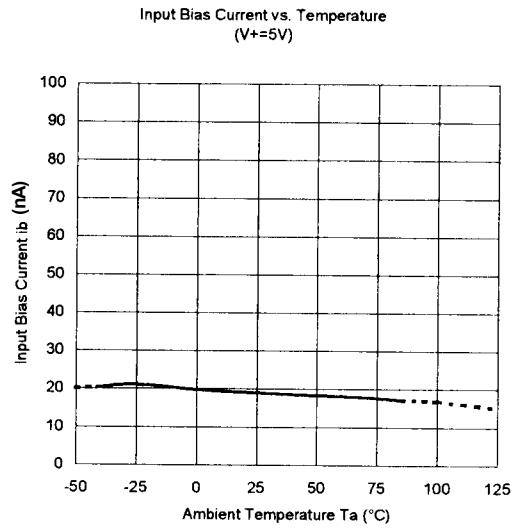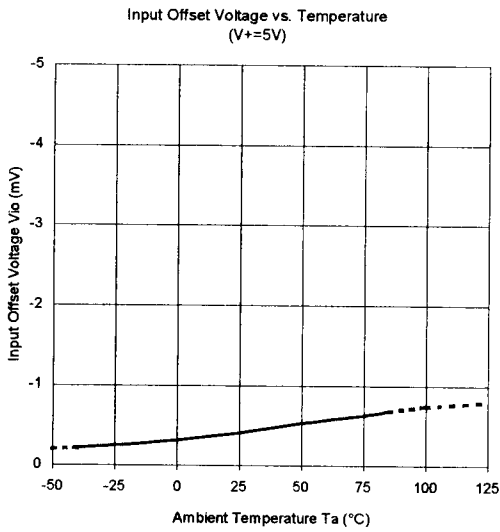

## ■ TYPICAL CHARACTERISTICS

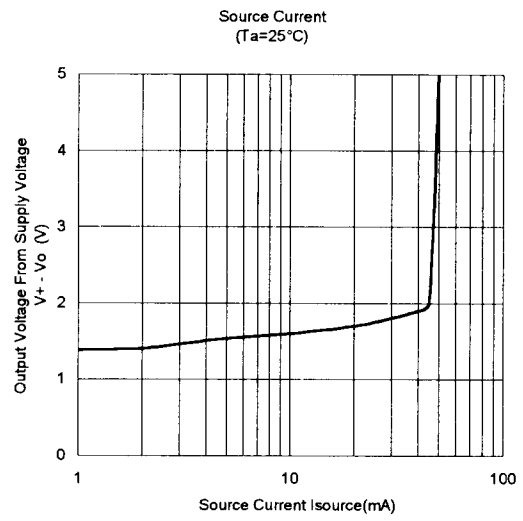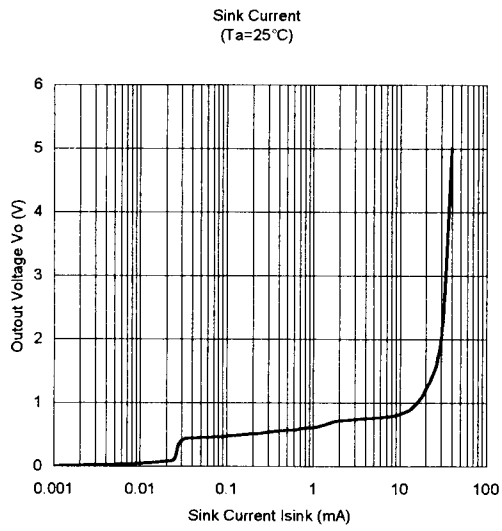

■ Memo

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.