

SINGLE-SUPPLY DUAL COMPARATOR

■ GENERAL DESCRIPTION

The NJM2903C consist of two independent voltage comparators that are designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. The NJM2903C has a unique characteristic: the input common-mode voltage range includes ground, even though operated from a single power supply voltage. Application areas include limit comparators, simple analog-to-digital converters; pulse, square-wave and time delay generators; wide range V_{CO} ; MOS clock timers; multivibrators and high voltage digital logic gates. The NJM2903C were designed to directly interface with TTL and MOS. When operated from both plus and minus power supplies, the NJM2903C will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.

■ PACKAGE OUTLINE



NJM2903CG (SOP8)



NJM2903CM (DMP8)




NJM2903CRB1 (U.D.) (MSOP8 (TVSP8))

■ FEATURES

- Operating Voltage +2V to +36V
- Single Supply Operation
- Open Collector Output
- Package Outline SOP8,DMP8
MSOP8 (TVSP8)* (U.D.)
*MEET JEDEC MO-187-DA / THIN TYPE
- Bipolar Technology
- Internal ESD protection Human body model (HBM) $\pm 2000V$ typ.
- Wide temperature range -40°C to +105°C


■ PIN CONFIGURATION



- PIN FUNCTION**
- 1.A OUTPUT
 - 2.A - INPUT
 - 3.A + INPUT
 - 4.V⁻
 - 5.B + INPUT
 - 6.B - INPUT
 - 7.B OUTPUT
 - 8.V⁺

**NJM2903CG
NJM2903CM
NJM2903CRB1**

■ EQUIVALENT CIRCUIT (1/2 Shown)

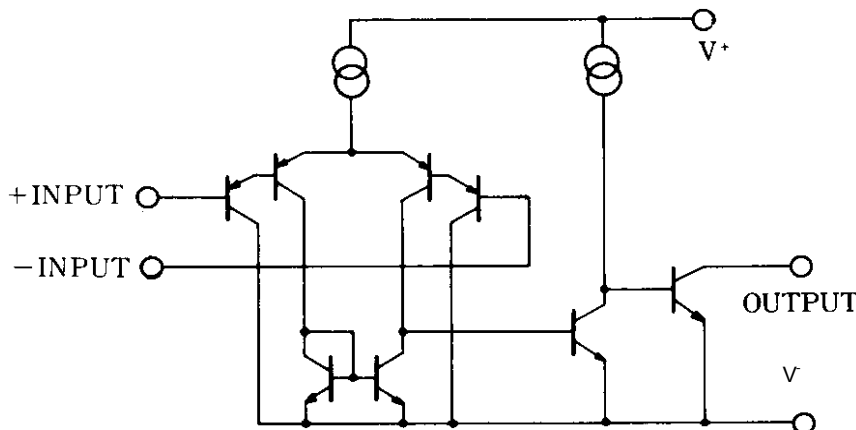

NJM2903C

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+ (V^+/V)	36 (or $\pm 18V$)	V
Differential Input Voltage (Note1)	V_{ID}	± 36	V
Input Voltage (Note2)	V_{IN}	$V - 0.3$ to $V + 36$	V
Output Terminal Input Voltage (Note3)	V_O	$V - 0.3$ to $V + 36$	V
Power Dissipation	P_D	SOP : 690(Note4) 1000(Note5) DMP : 470(Note4) 600(Note5) MSOP : TBD	mW
Operating Temperature Range	T_{opr}	-40 to +105	°C
Storage Temperature Range	T_{stg}	-65 to +150	°C

(Note1) Differential voltage is the voltage difference between +INPUT and -INPUT.

(Note2) Input voltage is the voltage should be allowed to apply to the input terminal independent of the magnitude of V^+

(Note3) Output voltage is the voltage should be allowed to apply to the output terminal independent of the magnitude of V^+ .

(Note4) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 2layers, FR-4) mounting







(Note5) EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR-4) mounting

■ ELECTRICAL CHARACTERISTICS


($V^+=5V, V_-=0V, T_a=25^\circ C$ unless otherwise noted.)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input offset voltage	V_{IO}	$R_S=0\Omega, V_O=1.4V$	-	0.5	5	mV
Input offset current	I_{IO}		-	0.5	50	nA
Input bias current	I_B		-	20	250	nA
Large signal voltage gain	A_V	$V^+=15V, R_L=15k\Omega, V_O=1V$ to 11V	94	106	-	dB
Input Common Mode Voltage Range	V_{ICM}		0	-	3.5	V
Supply current (all comparators)	I_{CC}	no load $V^+=+30V$, no load	-	0.45 0.6	1 2.5	mA
Low level output voltage	V_{OL}	$V_{id} = -1V, I_{sink} = 4mA$	-	80	400	mV
Output Leakage Current	I_{LEAK}	$V^+=V_O=30V, V_{id}=1V$	-	-	1	μA
Output sink current	I_{sink}	$V_{id}=1V, V_O=1.5V$	6	16	-	mA
Response Time	t_{re}	$R_L=5.1k\Omega$ to V^+	-	1.3	-	μs
Large Signal Response Time	t_{rel}	$R_L=5.1k\Omega$ to V^+ , $V_{ref}=+1.4V$, TTL input	-	250	-	ns


■ TYPICAL CHARACTERISTICS

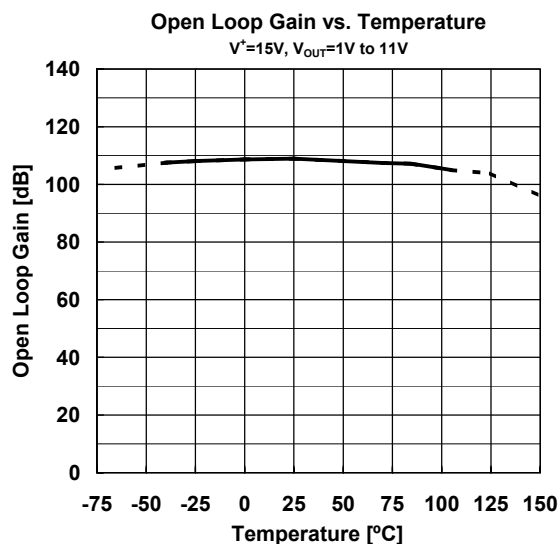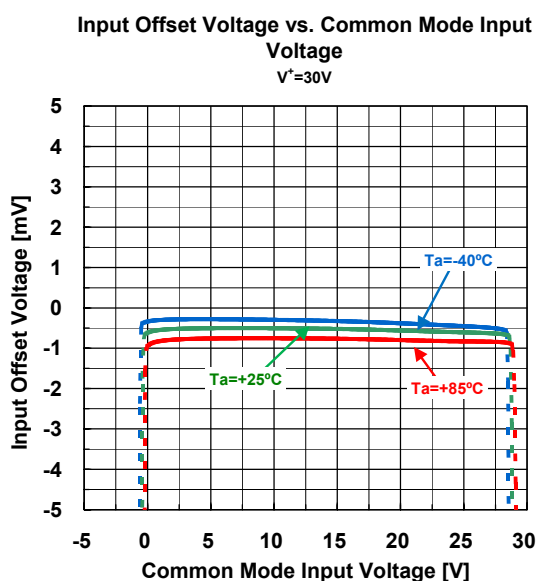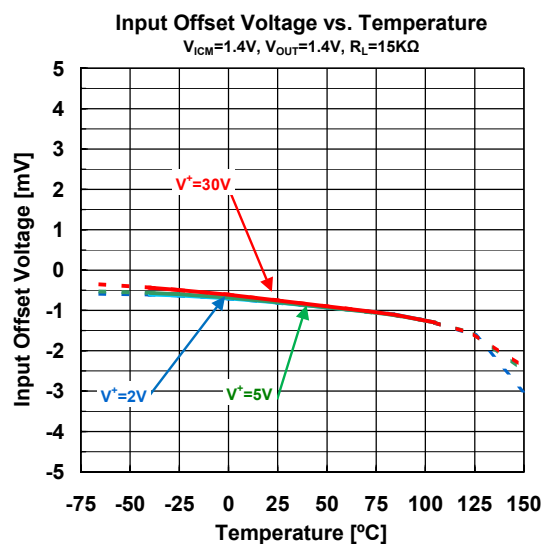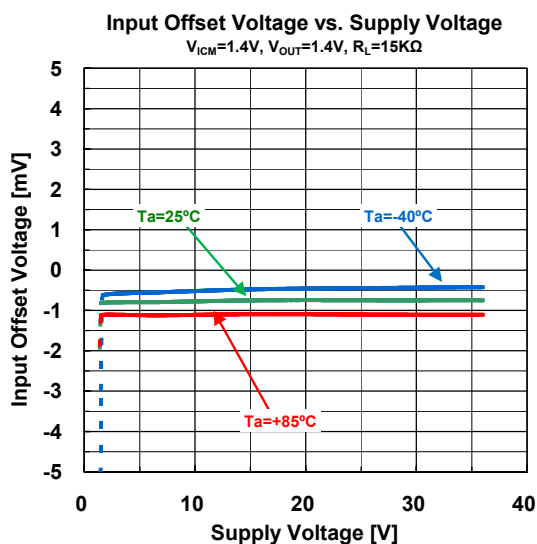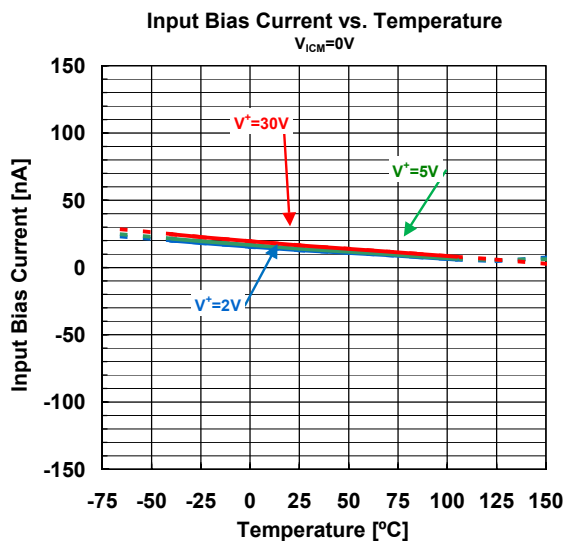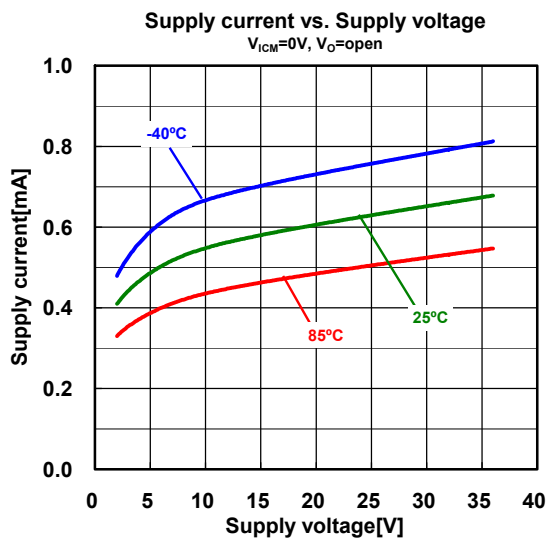


Output saturation voltage vs. supply voltage
Ta=25°C

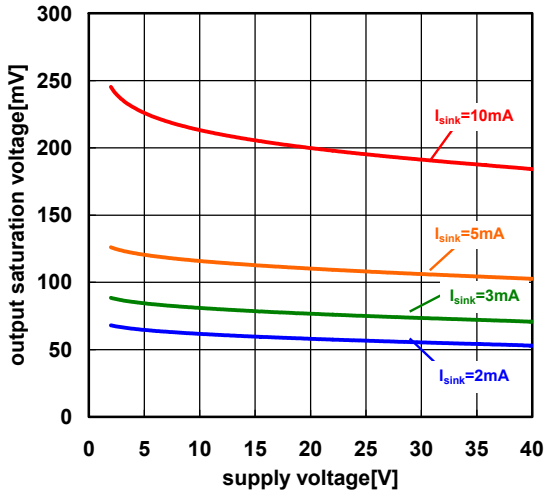

Output saturation voltage vs. output current
V⁺=5V, V_{ID}=-1V

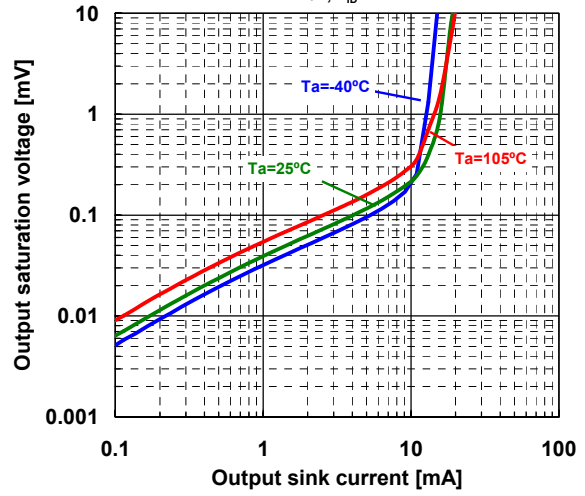


Propagation Delay Time vs. Temperature
V⁺=5V, V_{IN+}=GND, V_{IN-}=200mV_{PP}, ov=100mV, R_L=5.1kΩ

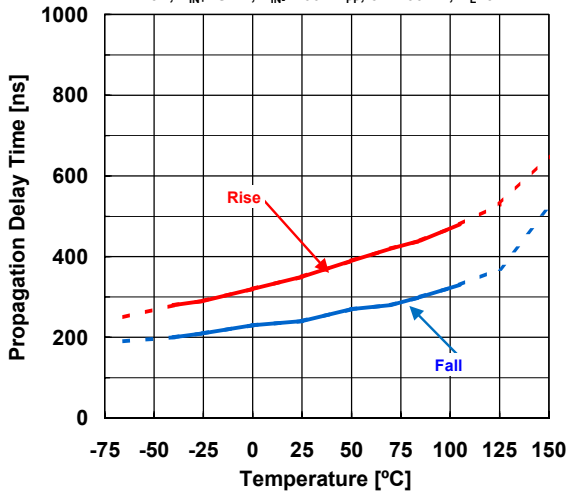


Response Time vs. Temperature

V⁺=5V, V_{IN+}=GND, V_{IN-}=200mV_{PP}, ov=100mV, R_L=5.1kΩ

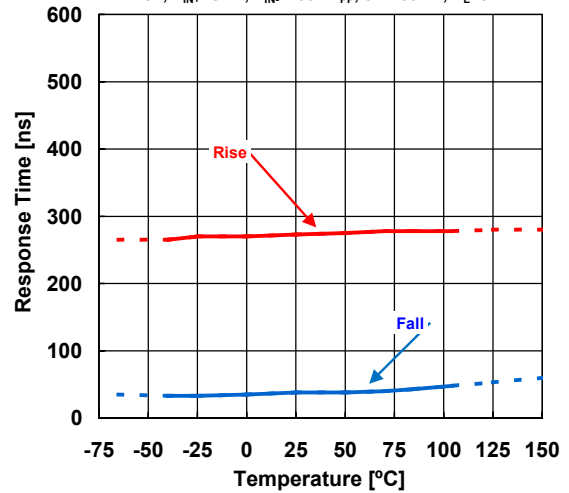


Propagation Delay Time



V⁺=5V, R_L=5.1kΩ, V_{REF}=GND, C_L=0pF, Ta=25°C

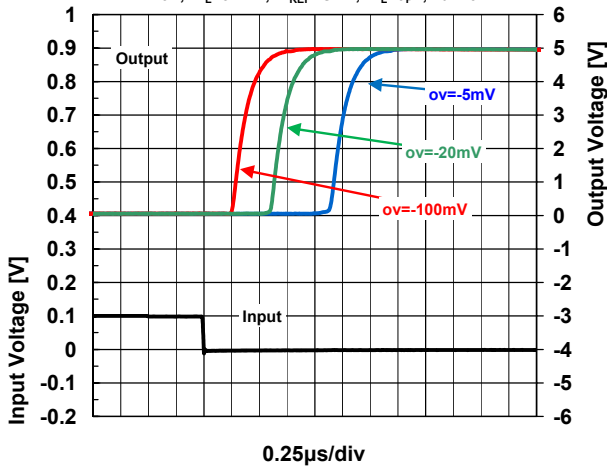

Propagation Delay Time


V⁺=5V, R_L=5.1kΩ, V_{REF}=GND, C_L=0pF, Ta=25°C

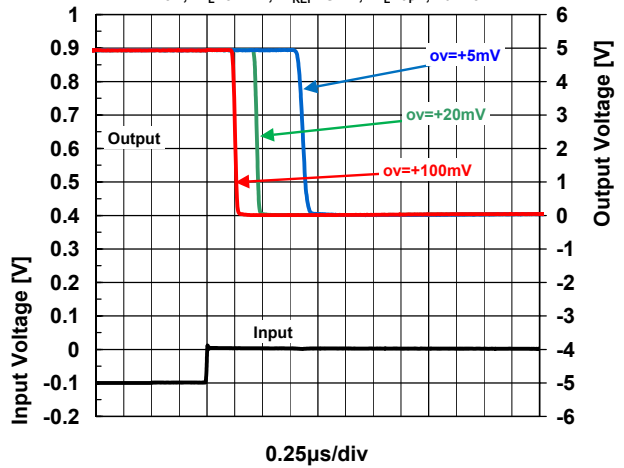

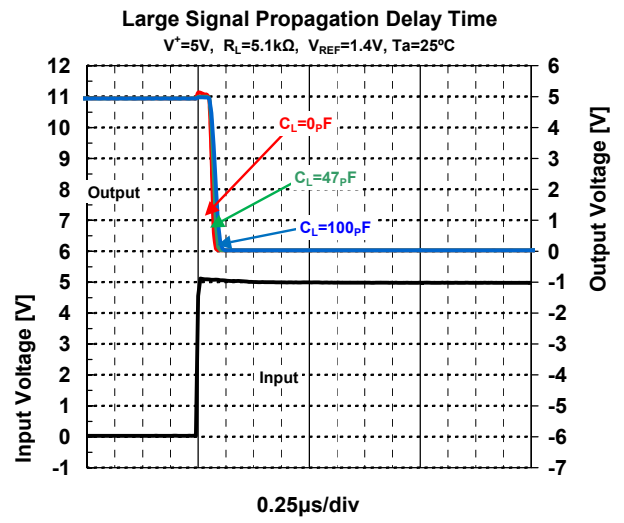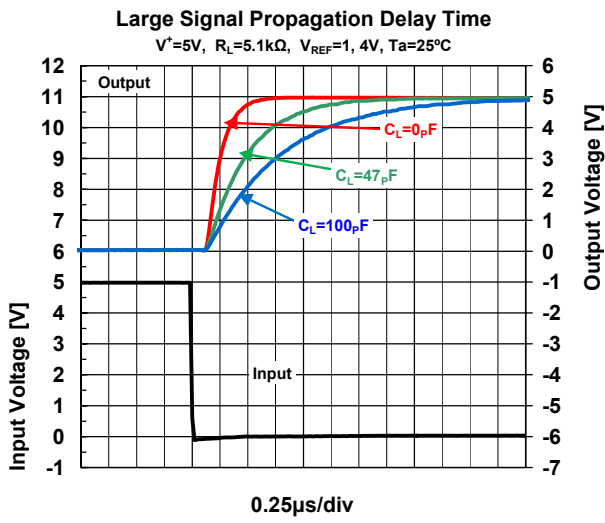


■ TYPICAL APPLICATIONS


Comparator With Hysteresis

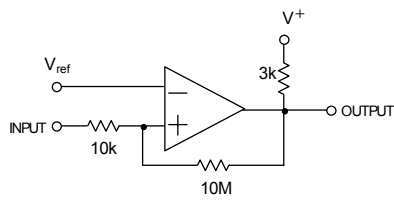

Pulse Generator




Output Strobing Circuit




NJM2903C

■PACKAGE OUTLINE UNIT : mm
SOP8

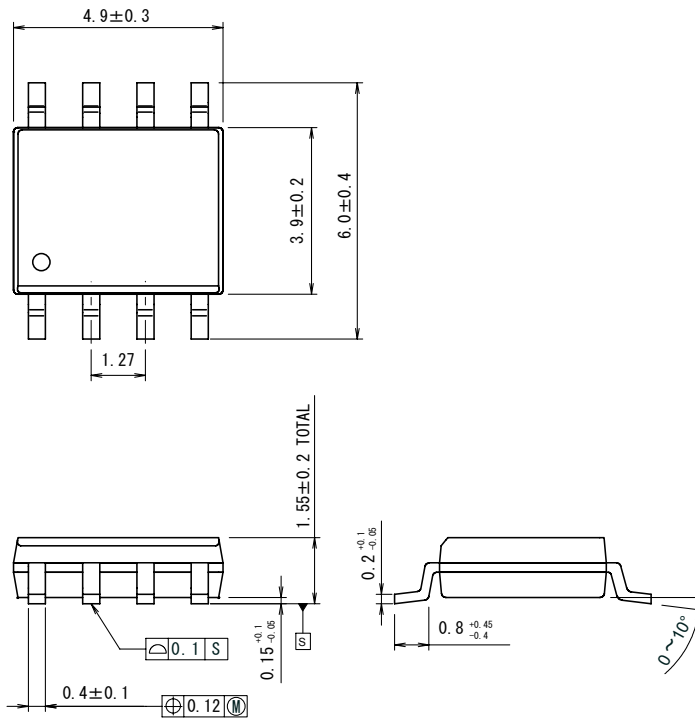


DMP8

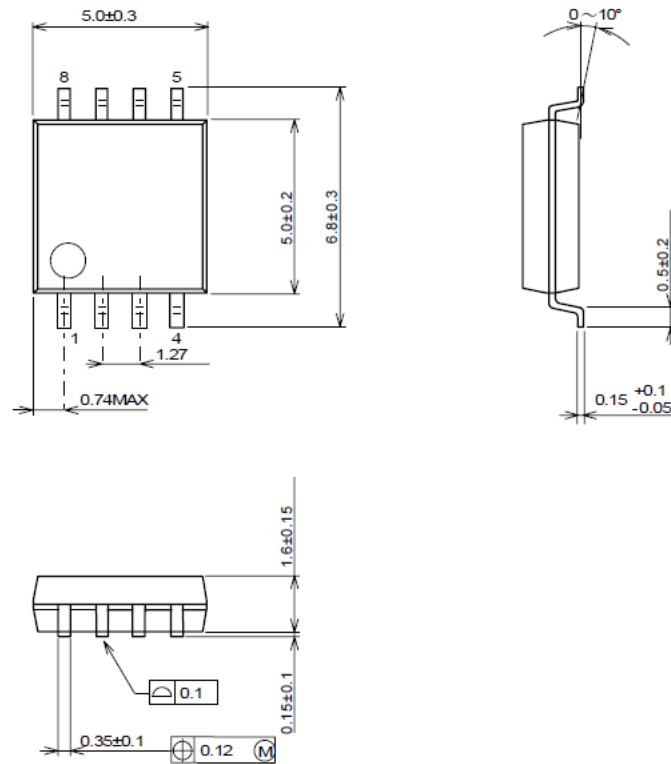

■ PACKAGE OUTLINE UNIT : mm

MSOP8 (TVSP8)*

*MEET JEDEC MO-187-DA / THIN TYPE

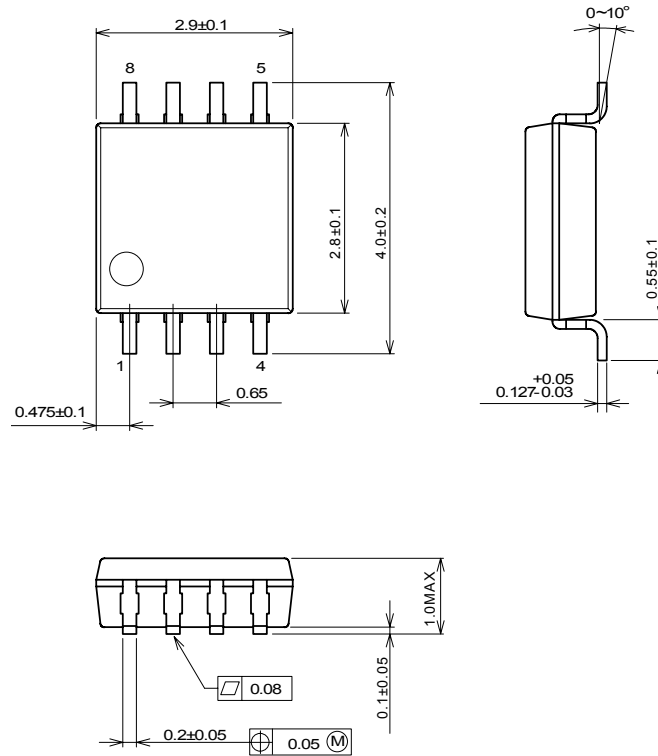

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.