

FEATURES AND BENEFITS

- CAN bus digital monitoring and communications
- Highest power performance available
- Over 1,000,000 duty cycles
- Temperature and voltage monitoring
- Ultra-low resistance

TYPICAL APPLICATIONS

- Buses
- Electric trains and trolleys
- Heavy duty transportation
- Cranes, RTGS
- Utility vehicles
- Mining equipment

**PRODUCT SPECIFICATIONS****ELECTRICAL****BMOD0063 P125 B04/B08**

Rated Capacitance ¹	63 F
Minimum Capacitance, initial ¹	63 F
Maximum ESR _{DC} , initial ¹	18 mΩ
Rated Voltage	125 V
Absolute Maximum Voltage ¹⁵	136 V
Maximum Continuous Current ($\Delta T = 15^{\circ}\text{C}$) ²	140 A _{RMS}
Maximum Continuous Current ($\Delta T = 40^{\circ}\text{C}$) ²	240 A _{RMS}
Maximum Peak Current, 1 second (non repetitive) ³	1,800 A
Leakage Current, maximum (VMS 2.0) ⁴	10 mA
Maximum Series Voltage	1,500 V

TEMPERATURE

Operating Temperature (Ambient temperature)	
Minimum	-40°C
Maximum	65°C
Storage Temperature (Stored uncharged)	
Minimum	-40°C
Maximum	70°C

PRODUCT SPECIFICATIONS (Cont'd)

PHYSICAL

BMOD0063 P125 B04/B08

Mass, typical ¹³	60.5 kg
Power Terminals	Radsok
Recommended Torque - Terminal	N/A
Vibration Specification	ISO16750-3 Table 14
Shock Specification	SAE J2464
Environmental Protection	IP65
Cooling	Forced Air

MONITORING / CELL VOLTAGE MANAGEMENT

Temperature Interface	Serial Data (CAN)
Cell Voltage Monitoring	Group Voltage (CAN)
Connector	Deutsch DTM
Cell Voltage Management	VMS 2.0

POWER & ENERGY

Usable Specific Power, P_d^5	1,700 W/kg
Impedance Match Specific Power, P_{max}^6	3,600 W/kg
Specific Energy, E_{max}^7	2.3 Wh/kg
Stored Energy ⁸	136.7 Wh

LIFE

High Temperature¹ (at Rated Voltage & Maximum Operating Temperature)	1,500 hours
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Room Temperature¹ (at Rated Voltage & 25°C)	10 years
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Cycle Life^{1,9}	1,000,000 cycles
Capacitance Change (% decrease from minimum initial value)	20%
ESR Change (% increase from maximum initial value)	100%
Test Current	100 A
Shelf Life^{1,10} (Stored uncharged up to a maximum storage temperature)	2 years

PRODUCT SPECIFICATIONS (Cont'd)

BMOD0063 P125 B04/B08

SAFETY

Short Circuit Current, typical
(Current possible with short circuit from rated voltage. Do not use as an operating current.)

6,900 A

Factory High-Pot Test¹⁴

4,000 V DC

Certifications

RoHS
eMark 72/245/EEC (B08 only)
UN10.03 (B08 only)

TYPICAL CHARACTERISTICS

THERMAL CHARACTERISTICS

Thermal Resistance
(R_{ma} , Module Case to Ambient), typical

0.01°C/W


Thermal Resistance
(R_{ca} , All Cell Cases to Ambient), typical

0.04°C/W

Thermal Capacitance (C_{th}), typical²

33,370 J/°C

ESR AND CAPACITANCE VS TEMPERATURE

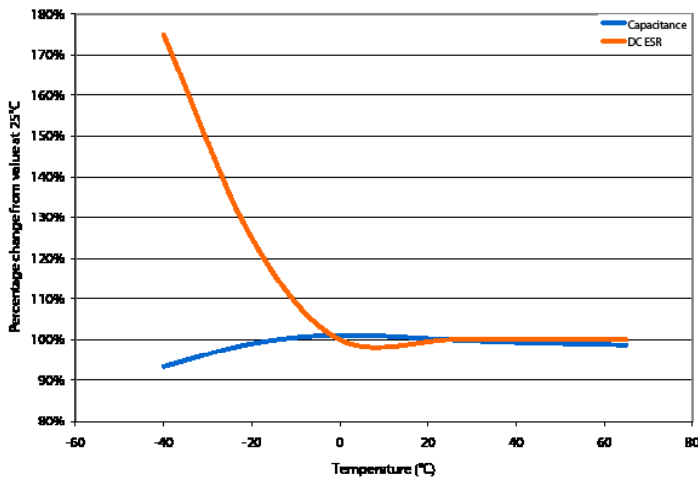

NOTES

1. Capacitance and ESR_{DC} measured at 25°C per Document Number 1007239 available at www.maxwell.com.
2. Per Maxwell Document 1007239 available at www.maxwell.com.
3. Maximum Peak current (1 sec) = $\frac{1/2 CV}{C \times ESR_{DC} + 1}$
4. After 72 hours at 25°C and rated voltage. Initial leakage current can be higher.
5. Per IEC 62391-2, $P_d = \frac{0.12V^2}{ESR_{DC} \times \text{mass}}$
6. $P_{max} = \frac{V^2}{4 \times ESR_{DC} \times \text{mass}}$
7. $E_{max} = \frac{1/2 CV^2}{3,600 \times \text{mass}}$
8. $E_{stored} = \frac{1/2 CV^2}{3,600}$
9. Cycle per Document Number 1007239 available at www.maxwell.com.
10. No more than 10% decrease in capacitance from minimum initial capacitance or 50% increase in ESR from maximum initial ESR.
11. Tested at 1 kV DC.
12. For a given application, sufficient cooling must be provided to keep cell case temperatures below 65°. See R_{th} .
13. Without fan. With fan, mass is 63.4 kg.
14. Duration = 60 seconds. Not intended as an operating parameter.
15. Absolute maximum voltage non repeated, not to exceed 1 second.


MOUNTING RECOMMENDATIONS

Please refer to the user manual for installation recommendations.

MARKINGS

Products are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal, warning marking, serial number.

BMOD0063 P125 Bxx

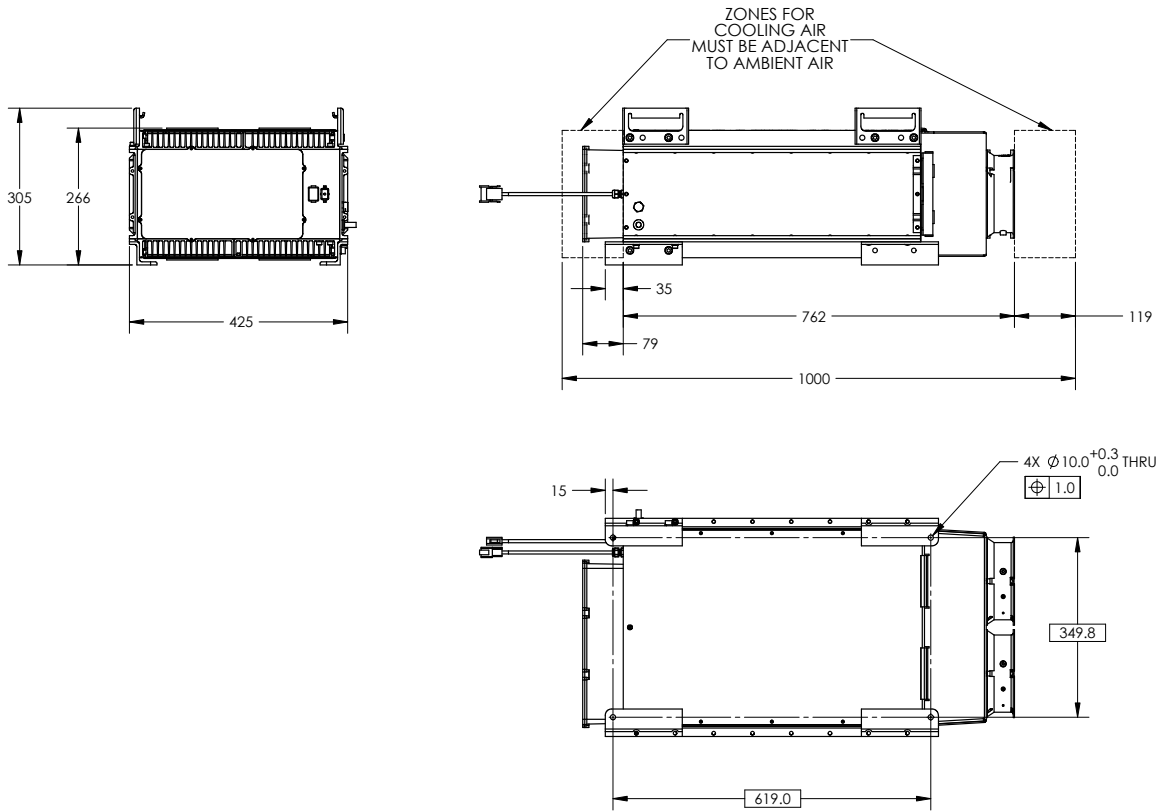

Part Description	Dimensions (mm)			Package Quantity
	L (±0.5mm)	W (±0.2mm)	H (±0.7mm)	
BMOD0063 P125 B04/08	619	425	265	1

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application. All products featured on this datasheet are covered by the following U.S. patents and their respective foreign counterparts: 7511942, 7307830, 7203056, 7180726, 7027290, 7.352.558, 7.295.423, 7.090.946, 7.508.651, 7.492.571, 7.342.770, 6.643.119, 7.384.433, 7.147.674, 7.317.609, 7.495.349, 7.102.877.

ORDERING INFORMATION

Base Module

109120B BMOD0063 P125 B04 63F/125V Module with CAN Comm.
109024B BMOD0063 P125 B08 63F/125V e-mark Module with CAN Comm.

Power Connection Kit

109131 Power Connection Kit, 90DEG
109132 Power Connection Kit, STRAIGHT

Communication Kit

109133 CAN SIGNAL, Deutsch

Fan Kit

109134 FAN KIT, 24V Standard
129036 FAN KIT, 24V, E-Mark



Maxwell Technologies, Inc.
Global Headquarters
5271 Viewridge Court, Suite 100
San Diego, CA 92123
USA
Tel: +1 858 503 3300
Fax: +1 858 503 3301



Maxwell Technologies SA
CH-1728 Rossens
Switzerland
Tel: +41 (0)26 411 85 00
Fax: +41 (0)26 411 85 05



Maxwell Technologies, GmbH
Brucker Strasse 21
D-82205 Gilching
Germany
Tel: +49 (0)8105 24 16 16
Fax: +49 (0)8105 24 16 19



Maxwell Technologies, Inc.
Shanghai Representative Office
13E, CR Times Square
500 Zhangyang Road, Pudong
Shanghai 200122, P.R. China
Tel: +86 21 5836 8780
Fax: +86 21 5836 8790