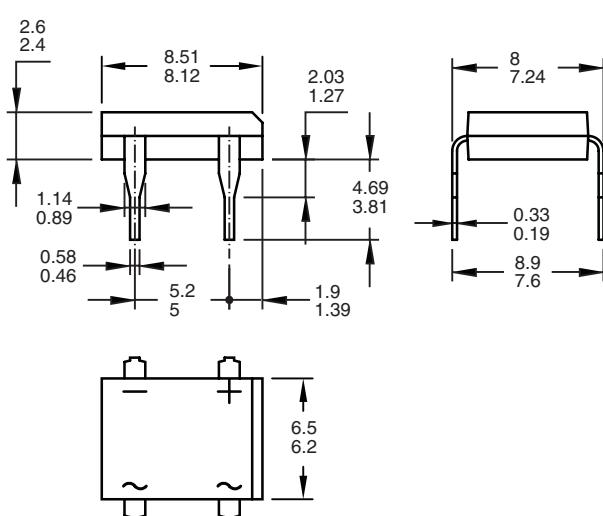


## Single Phase 1.0 Amp. Glass Passivated Bridge Rectifiers

Dimensions in mm.	CASE: THIN DF-M	Voltage 400 V-1000V	Current 1.0 A
	 <ul style="list-style-type: none"> <li>• Glass passivated junction</li> <li>• Ideal for printed circuit board</li> <li>• Reliable low cost construction utilizing molded plastic technique</li> <li>• High temperature soldering guaranteed: 260 °C / 10 seconds / 9.5mm lead length at 5 lbs., (2.3 Kg) tension</li> <li>• Small size, simple installation Pure tin plated terminal, Lead free. Leads solderable per MIL-STD-202, Method 208</li> <li>• High surge current capability</li> </ul>		

### Maximum Ratings and Electrical Characteristics

		<b>DBL 104G</b>	<b>DBL 105G</b>	<b>DBL 106G</b>	<b>DBL 107G</b>
$V_{RRM}$	Maximum Recurrent Peak Reverse Voltage (V)	400	600	800	1000
$V_{RMS}$	Maximum RMS Voltage (V)	280	420	560	700
$V_{DC}$	Maximum DC Blocking Voltage (V)	400	600	800	1000
$I_{F(AV)}$	Maximum average Forward Rectified Current @ $T_A = 40^\circ C$	1.0 A			
$I_{FSM}$	Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	50 A			
$C_j$	Typical Junction Capacitance	25 pF			
$R_{th(j-l)}$	Typical Thermal Resistance (Note 1)	15 °C/W			
$R_{th(j-a)}$		40 °C/W			
$T_j$	Operating Temperature Range	-50 to + 150 °C			
$T_{stg}$	Storage Temperature Range	-50 to + 150 °C			

### Electrical Characteristics at Tamb = 25 °C

		<b>DBL 104G</b>	<b>DBL 105G</b>	<b>DBL 106G</b>	<b>DBL 107G</b>
$V_F$	Max. Instantaneous Forward Voltage @ 1.0A	1.1 V			
$I_R$	Maximum DC Reverse Current @ $T_A = 25^\circ C$ at Rated DC Blocking Voltage @ $T_A = 125^\circ C$	10 μA			
		500 μA			

Note: 1. Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted On P.C.B. with 5 x 5mm Copper Pads.  
 2. DBLS for Surface Mount Package.

## Rating And Characteristic Curves

