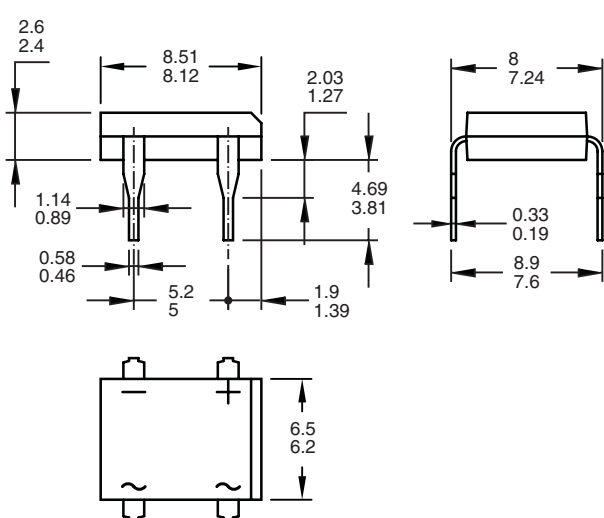


Single Phase 2.0 Amp. Glass Passivated Bridge Rectifiers

<p>Dimensions in mm.</p> 	<p>CASE: THIN DF-M</p>	<p>Voltage 400 V-1400 V</p>	<p>Current 2.0 A</p>
<ul style="list-style-type: none"> Glass passivated junction Ideal for printed circuit board Reliable low cost construction utilizing molded plastic technique High surge current capability High temperature soldering guaranteed: 260 °C / 10 seconds at 5 lbs., (2.3 Kg) tension Small size, simple installation Pure tin plated terminal, Lead free. Leads solderable per MIL-STD-202, Method 208 			

Maximum Ratings and Electrical Characteristics

		DBL 204G	DBL 205G	DBL 206G	DBL 207G	DBL 208G	DBL 209G
V_{RRM}	Maximum Recurrent Peak Reverse Voltage (V)	400	600	800	1000	1200	1400
V_{RMS}	Maximum RMS Voltage (V)	280	420	560	700	840	980
V_{DC}	Maximum DC Blocking Voltage (V)	400	600	800	1000	1200	1400
$I_{F(AV)}$	Maximum average Forward Rectified Current @ $T_A = 40\text{ °C}$	2.0 A					
I_{FSM}	Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	50 A					
$R_{th(j-i)}$	Typical Thermal Resistance (Note)	15 °C/W					
$R_{th(j-a)}$		40 °C/W					
T_j	Operating Temperature Range	-55 to + 150 °C					
T_{stg}	Storage Temperature Range	-55 to + 150 °C					


Electrical Characteristics at $T_{amb} = 25\text{ °C}$

		DBL 204G	DBL 205G	DBL 206G	DBL 207G	DBL 208G	DBL 209G
V_F	Max. Instantaneous Forward Voltage @ 1.5A	1.15 V				1.30 V	
I_R	Maximum DC Reverse Current @ $T_A = 25\text{ °C}$ at Rated DC Blocking Voltage @ $T_A = 125\text{ °C}$	10 μ A 500 μ A					


Note: Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 10 x 10mm Copper Pads.

Rating And Characteristic Curves


MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

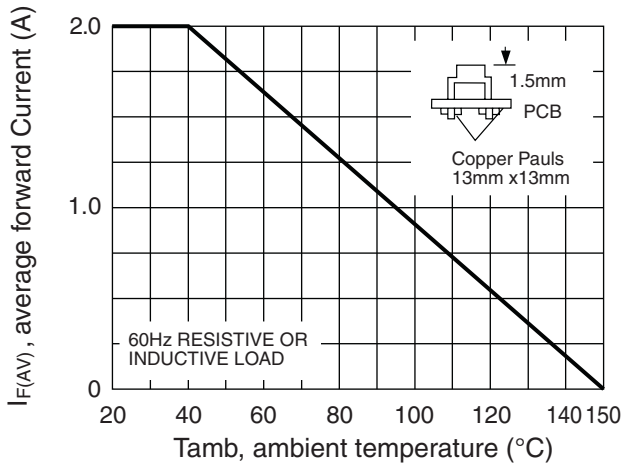


TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

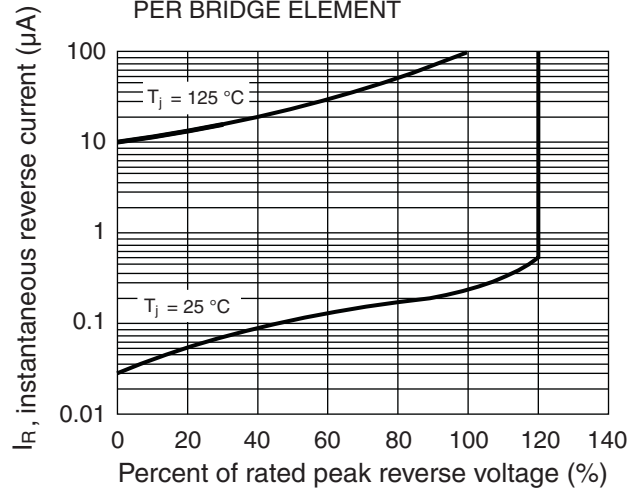

MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

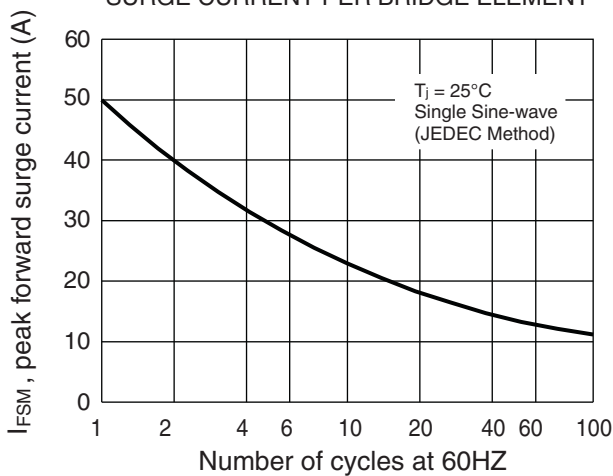

TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

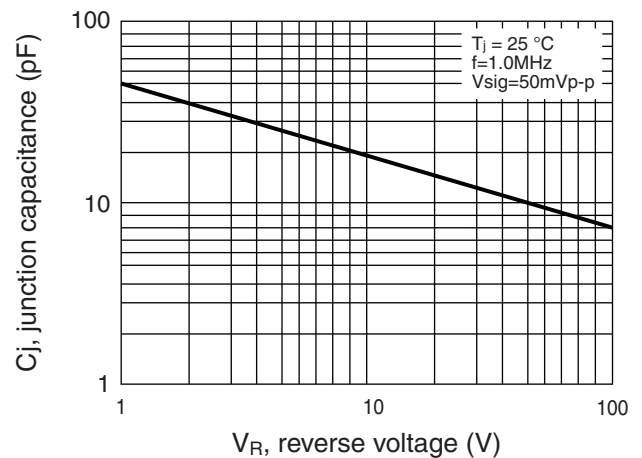

TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

