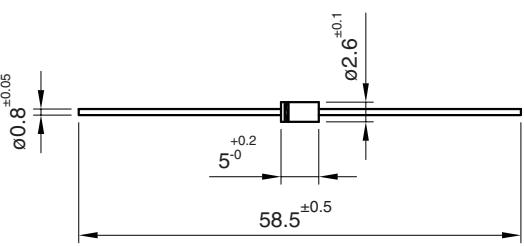


0.5 Amp. Glass Passivated Fast Recovery Rectifier

Dimensions in mm.	DO-41 (Plastic)	Voltage 1200 to 2000 V	Current 0.5 A at 55 °C
	 <p>The diagram shows the physical dimensions of the DO-41 plastic package. It features a rectangular body with a central lead frame. Key dimensions are: height (top to bottom) $\phi 0.8^{+0.05}$, width (left to right) $58.5^{+0.5}$, and lead thickness $\phi 2.6^{+0.1}$. The lead pitch is $+0.2$ and the lead height is 5^{+0}.</p>		
 <p>HYPERRECTIFIER®</p>			
<ul style="list-style-type: none"> • Glass passivated junction • High current • The plastic material carries U/L recognition 94 V-0 • Terminals: Axial Leads • Polarity: Color band denotes cathode 			
Mounting instructions <ol style="list-style-type: none"> 1. Min. distance from body to soldering point, 4 mm. 2. Max. solder temperature, 350 °C. 3. Max. soldering time, 3.5 sec. 4. Do not bend lead at a point closer than 2 mm. to the body. 			

Maximum Ratings, according to IEC publication No. 134

		RGP02 -12	RGP02 -14	RGP02 -16	RGP02 -18	RGP02 -20
V_{RRM}	Peak Recurrent Reverse Voltage (V)	1200	1400	1600	1800	2000
$I_{F(AV)}$	Forward Current at Tamb = 55 °C			0.5 A		
I_{FRM}	Recurrent Peak Forward Current			7 A		
I_{FSM}	8.3 ms. Peak Forward Surge Current (Jedec Method)			20 A		
t_{rr}	Maximum reverse recovery time from $I_F = 0.5$ A; $I_R = 1$ A; $I_{RR} = 0.25$ A			300 ns		
T_j	Operating Temperature Range			-65 to +175°C		
T_{stg}	Storage Temperature Range			-65 to +175°C		

Electrical Characteristics at Tamb = 25°C

V_F	Maximum Forward Voltage Drop at $I_F = 0.5$ A $I_F = 1$ A	2.2 V 1.8 V
I_R	Maximum Reverse Current at V_{RRM} at 25 °C at 150 °C	5 µA 200 µA
$R_{th(j-a)}$	Thermal Resistance ($I = 10$ mm.) Max. Typ.	60 °C/W 45 °C/W

Rating And Characteristic Curves

