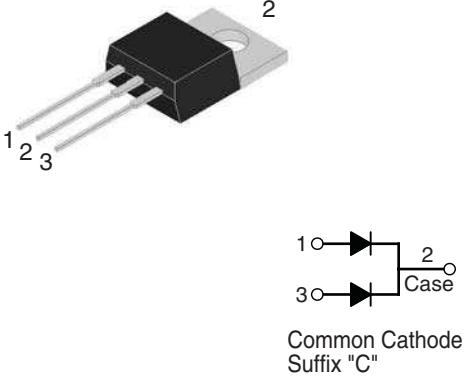



## 10 Amp. Glass Passivated Ultrafast Recovery Rectifier

<b>TO-220AB</b>   Common Cathode Suffix "C"	<b>Voltage</b> 200 to 600 V	<b>Current</b> 10 A
<ul style="list-style-type: none"> <li>• <b>Glass Passivated Junction</b></li> <li>• High current capability</li> <li>• The plastic material U/L recognition 94 V-0</li> <li>• Terminals: Leads solderable per MIL-STD202</li> <li>• Low forward Voltage drop</li> </ul>		





### Absolute Maximum Ratings, according to IEC publication No. 134

		<b>SF1004G</b>	<b>SF1006G</b>	<b>SF1008G</b>		
$V_{RRM}$	Peak recurrent reverse voltage (V)	200	400	600		
$V_{RMS}$	Maximum RMS voltage (V)	140	280	420		
$V_{DC}$	Maximum DC blocking voltage (V)	200	400	600		
$I_{F(AV)}$	Maximum Average Forward current at $T_C = 100^\circ\text{C}$ (both diodes conducting)	10 A				
$I_{FSM}$	8.3 ms. peak forward surge current (Jedec Method)	125 A				
$t_{RR}$	Max. reverse recovery time from $I_F = 0.5 \text{ A} ; I_R = 1 \text{ A} ; I_{RR} = 0.25 \text{ A}$	35 ns				
$C_j$	Typical Junction Capacitance at 1 MHz and reverse voltaje of $4V_{DC}$	70 pF	50 pF			
$T_j$	Operating temperature range	− 65 to + 150 °C				
$T_{stg}$	Storage temperature range	− 65 to + 150 °C				

### Electrical Characteristics

		<b>SF1004G</b>	<b>SF1006G</b>	<b>SF1008G</b>
$V_F$	Max. forward voltage drop at $I_F = 5 \text{ A}$ $T_j = 25^\circ\text{C}$	0.975 V	1.3 V	1.7 V
$I_R$	Max. Instantaneous reverse current at $V_R = V_{RRMax}$ $T_j = 25^\circ\text{C}$	10 µA		
	$T_j = 100^\circ\text{C}$	400 µA		
$R_{thj-C}$	Typical Thermal Resistance	3.5 °C/W		

## 10 Amp. Glass Passivated Ultrafast Recovery Rectifier

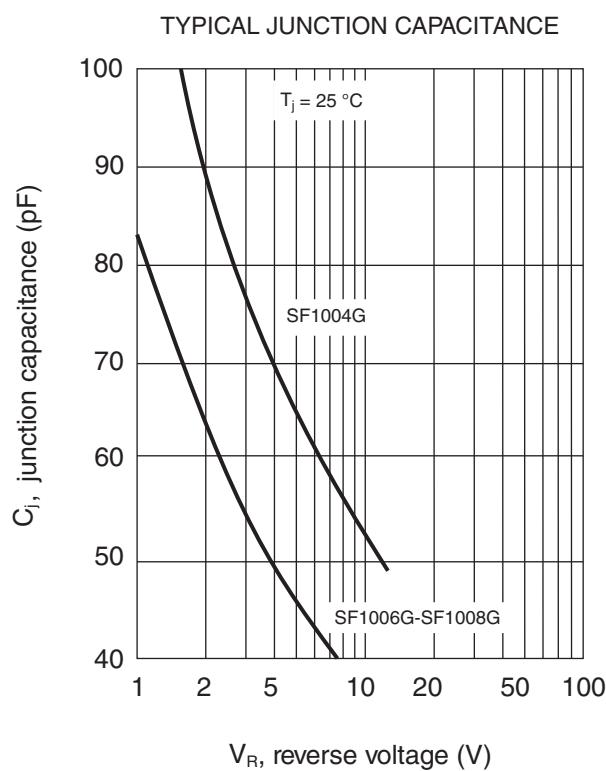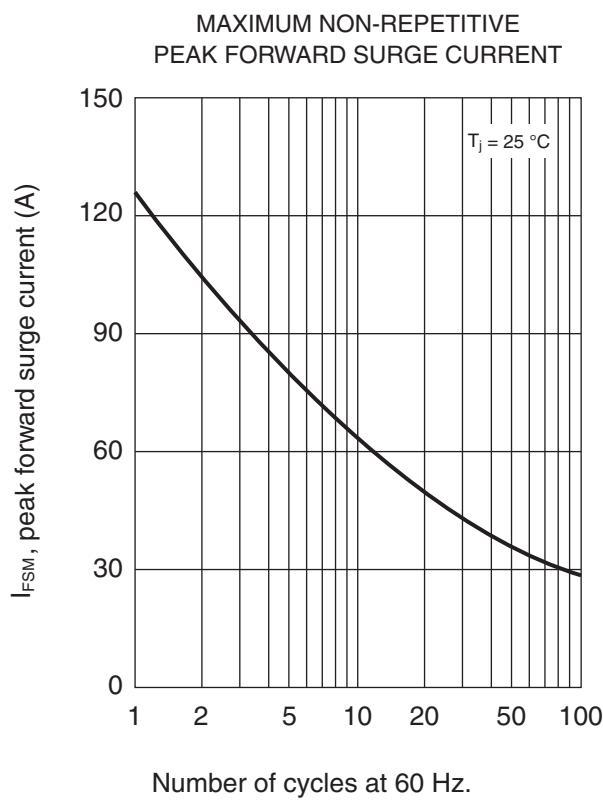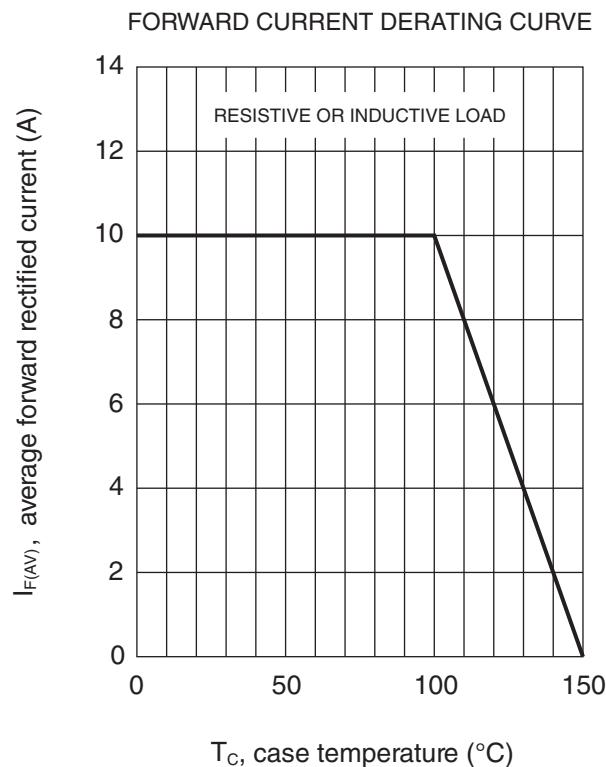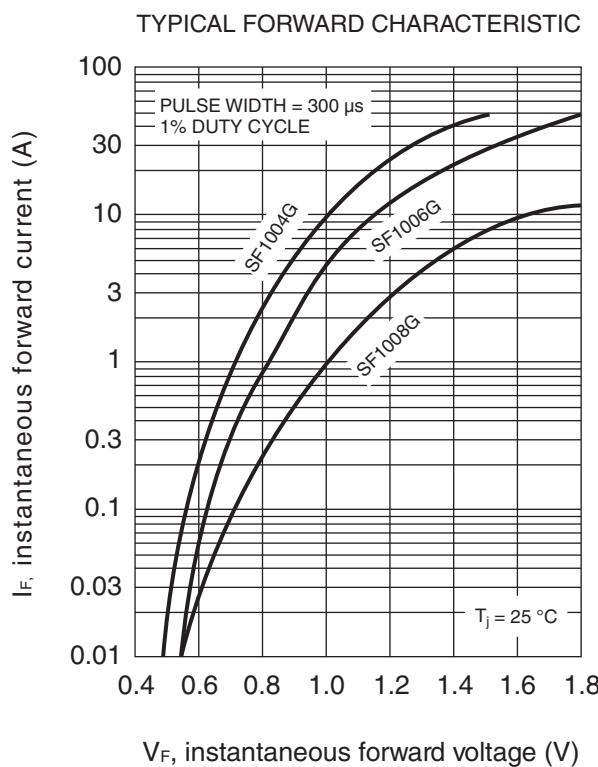


Number of cycles at 60 Hz.

Jul - 07

## 10 Amp. Glass Passivated Ultrafast Recovery Rectifier

### PACKAGE MECHANICAL DATA

### TO-220AB

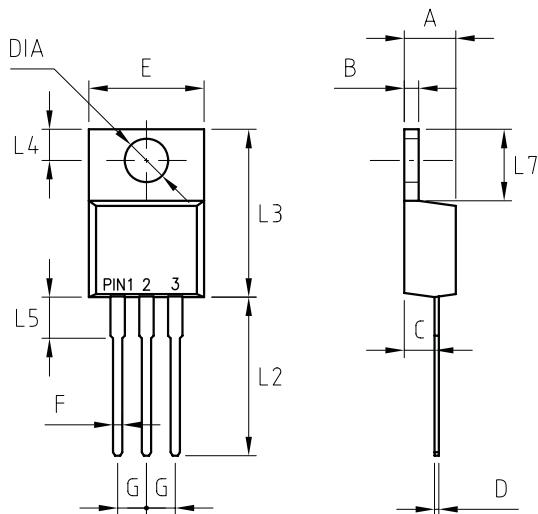

REF.	DIMENSIONS	
	Milimeters	
	Min.	Max.
A	4.44	4.70
B	1.14	1.40
C	2.54	2.79
D	0.35	0.64
E	--	10.5
F	0.68	0.94
G	2.41	2.67
L2	13.46	14.22
L3	14.90	15.10
L4	2.62	2.87
L5	3.56	4.06
L7	5.84	6.86
DIA	3.74	3.91