



10 Amp. Glass Passivated Ultrafast Recovery Rectifier


TYPICAL FORWARD CHARACTERISTIC

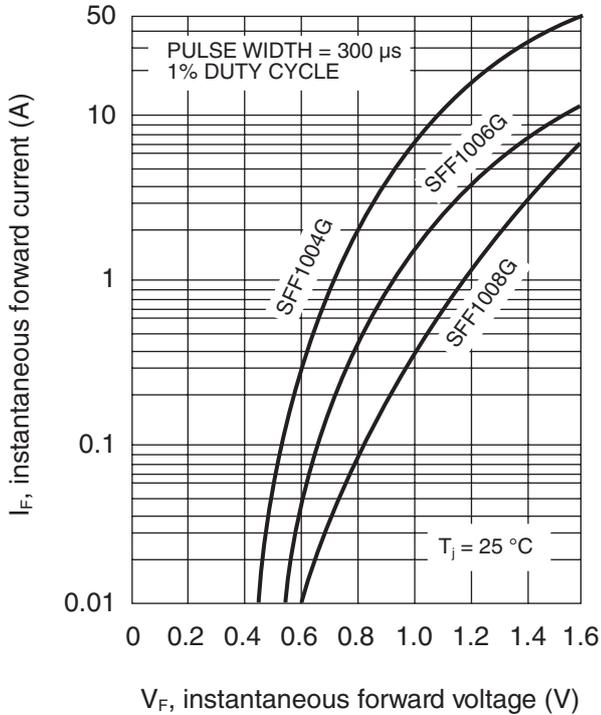


FORWARD CURRENT DERATING CURVE

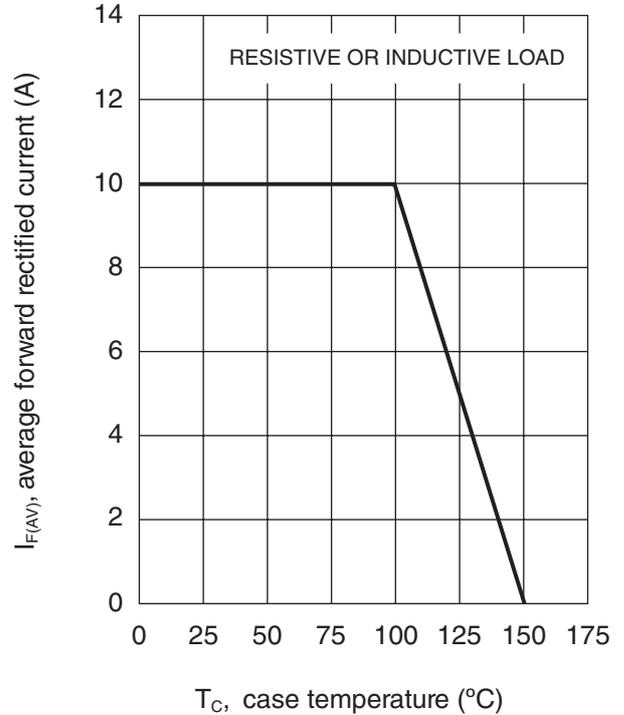

MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

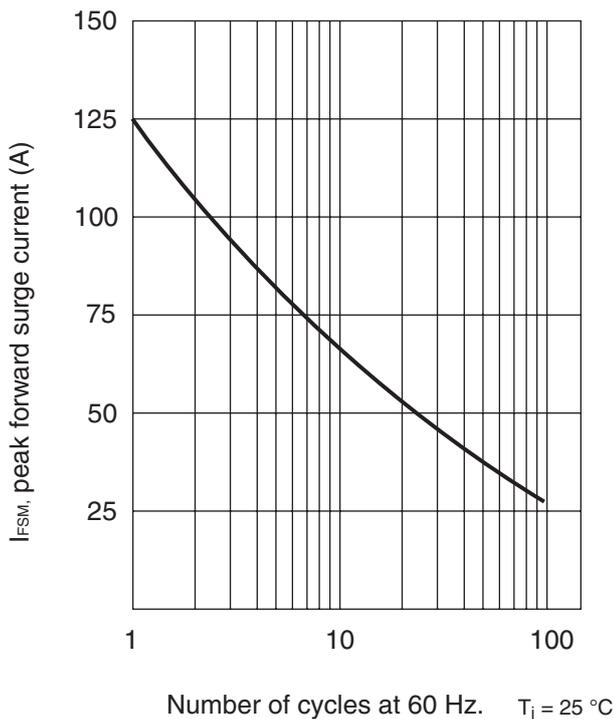


TYPICAL JUNCTION CAPACITANCE

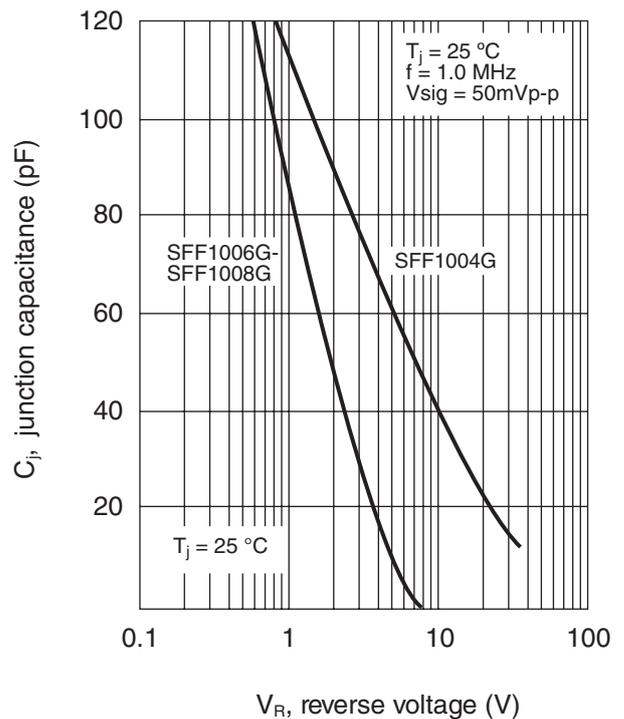

10 Amp. Glass Passivated Ultrafast Recovery Rectifier

PACKAGE MECHANICAL DATA ITO-220AB

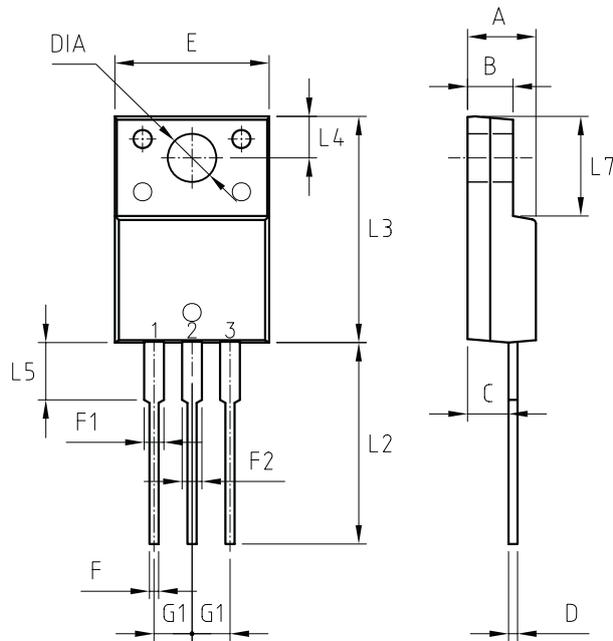

REF.	DIMENSIONS		
	Milimeters		
	Min.	Nominal	Max.
A	4.4	-	4.7
B	3.0	-	3.16
C	2.5	-	2.8
D	0.5	-	0.76
E	9.9	-	10.3
F	0.5	-	0.9
F1	1.1	-	1.4
F2	-	-	1.8
G1	2.4	2.55	2.7
L2	13.2	-	13.8
L3	14.8	-	15.5
L4	2.55	-	2.85
L5	3.7	-	4.1
L7	6.3	-	6.9
DIA	3.0	-	3.4