


# SKiIP 24NAB12T4V1

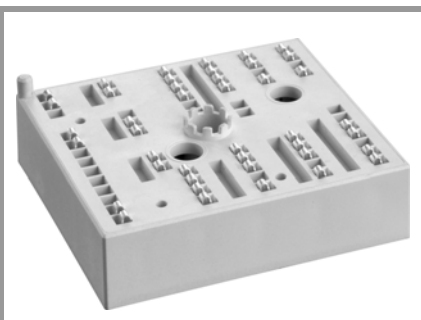

MiniSKiIP® 2

## SKiIP 24NAB12T4V1

### Features

- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532


### Typical Applications\*

- Inverter up to 22 kVA
- Typical motor power 11 kW

### Remarks


- $V_{CEsat}$ ,  $V_F$  = chip level value
- Case temp. limited to  $T_C = 125^\circ\text{C}$  max. (for baseplateless modules  $T_C = T_S$ )
- product rel. results valid for  $T_j \leq 150$  (recomm.  $T_{op} = -40 \dots +150^\circ\text{C}$ )

Absolute Maximum Ratings			
Symbol	Conditions	Values	Unit
<b>Inverter - IGBT</b>			
$V_{CES}$	$T_j = 25^\circ\text{C}$	1200	V
$I_C$	$T_j = 150^\circ\text{C}$	$T_s = 25^\circ\text{C}$	43
		$T_s = 70^\circ\text{C}$	33
$I_C$	$T_j = 175^\circ\text{C}$	$T_s = 25^\circ\text{C}$	48
		$T_s = 70^\circ\text{C}$	39
$I_{Cnom}$		35	A
$I_{CRM}$	$I_{CRM} = 3 \times I_{Cnom}$	105	A
$V_{GES}$		-20 ... 20	V
$t_{psc}$	$V_{CC} = 800\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 1200\text{ V}$	$T_j = 150^\circ\text{C}$	10
$T_j$		-40 ... 175	$^\circ\text{C}$
<b>Chopper - IGBT</b>			
$V_{CES}$	$T_j = 25^\circ\text{C}$	1200	V
$I_C$	$T_j = 150^\circ\text{C}$	$T_s = 25^\circ\text{C}$	43
		$T_s = 70^\circ\text{C}$	33
$I_C$	$T_j = 175^\circ\text{C}$	$T_s = 25^\circ\text{C}$	48
		$T_s = 70^\circ\text{C}$	39
$I_{Cnom}$		35	A
$I_{CRM}$	$I_{CRM} = 3 \times I_{Cnom}$	105	A
$V_{GES}$		-20 ... 20	V
$t_{psc}$	$V_{CC} = 800\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 1200\text{ V}$	$T_j = 150^\circ\text{C}$	10
$T_j$		-40 ... 175	$^\circ\text{C}$
<b>Inverse - Diode</b>			
$V_{RRM}$	$T_j = 25^\circ\text{C}$	1200	V
$I_F$	$T_j = 150^\circ\text{C}$	$T_s = 25^\circ\text{C}$	39
		$T_s = 70^\circ\text{C}$	30
$I_F$	$T_j = 175^\circ\text{C}$	$T_s = 25^\circ\text{C}$	44
		$T_s = 70^\circ\text{C}$	35
$I_{Fnom}$		35	A
$I_{FRM}$	$I_{FRM} = 3 \times I_{Fnom}$	105	A
$I_{FSM}$	$t_p = 10\text{ ms, sin } 180^\circ, T_j = 150^\circ\text{C}$	170	A
$T_j$		-40 ... 175	$^\circ\text{C}$
<b>Freewheeling - Diode</b>			
$V_{RRM}$	$T_j = 25^\circ\text{C}$	1200	V
$I_F$	$T_j = 150^\circ\text{C}$	$T_s = 25^\circ\text{C}$	39
		$T_s = 70^\circ\text{C}$	30
$I_F$	$T_j = 175^\circ\text{C}$	$T_s = 25^\circ\text{C}$	44
		$T_s = 70^\circ\text{C}$	35
$I_{Fnom}$		35	A
$I_{FRM}$	$I_{FRM} = 3 \times I_{Fnom}$	105	A
$I_{FSM}$	$t_p = 10\text{ ms, sin } 180^\circ, T_j = 150^\circ\text{C}$	170	A
$T_j$		-40 ... 175	$^\circ\text{C}$

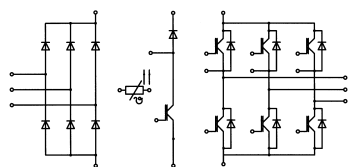

NAB

# SKiIP 24NAB12T4V1

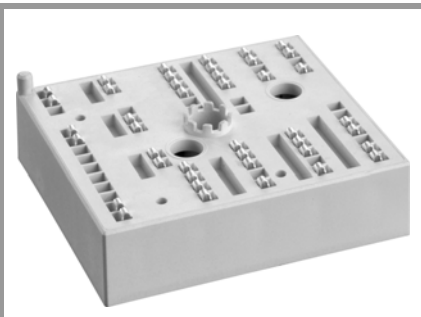

MiniSKiIP® 2

## SKiIP 24NAB12T4V1

### Features


- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

### Typical Applications\*

- Inverter up to 22 kVA
- Typical motor power 11 kW

### Remarks

- $V_{CEsat}$ ,  $V_F$  = chip level value
- Case temp. limited to  $T_C = 125^\circ\text{C}$  max. (for baseplateless modules  $T_C = T_S$ )
- product rel. results valid for  $T_j \leq 150$  (recomm.  $T_{op} = -40 \dots +150^\circ\text{C}$ )

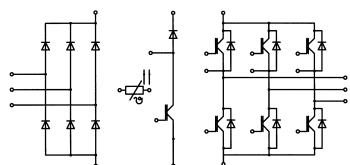


NAB

Absolute Maximum Ratings				
Symbol	Conditions	Values	Unit	
<b>Rectifier - Diode</b>				
$V_{RRM}$	$T_j = 25^\circ\text{C}$	1600	V	
$I_F$	$T_s = 25^\circ\text{C}, T_j = 150^\circ\text{C}$	52	A	
$I_{Fnom}$		13	A	
$I_{FSM}$	10 ms	$T_j = 25^\circ\text{C}$	370	A
	sin 180°	$T_j = 150^\circ\text{C}$	270	A
$I^2t$	10 ms	$T_j = 25^\circ\text{C}$	685	A <sup>2</sup> s
	sin 180°	$T_j = 150^\circ\text{C}$	365	A <sup>2</sup> s
$T_j$		-40 ... 150	°C	
<b>Module</b>				
$I_t(\text{RMS})$	$T_{\text{terminal}} = 80^\circ\text{C}, 20\text{A per spring}$	40	A	
$T_{stg}$		-40 ... 125	°C	
$V_{isol}$	AC sinus 50Hz, 1 min	2500	V	

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
<b>Inverter - IGBT</b>					
$V_{CE(sat)}$	$I_C = 35\text{ A}$ $V_{GE} = 15\text{ V}$ chiplevel	$T_j = 25^\circ\text{C}$	1.85	2.10	V
		$T_j = 150^\circ\text{C}$	2.25	2.45	V
$V_{CE0}$		$T_j = 25^\circ\text{C}$	0.8	0.9	V
		$T_j = 150^\circ\text{C}$	0.7	0.8	V
$r_{CE}$	$V_{GE} = 15\text{ V}$	$T_j = 25^\circ\text{C}$	30	34	mΩ
		$T_j = 150^\circ\text{C}$	44	47	mΩ
$V_{GE(th)}$	$V_{GE} = V_{CE}\text{ V}, I_C = 1\text{ mA}$	5	5.8	6.5	V
$I_{CES}$	$V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$	$T_j = 25^\circ\text{C}$	0.1	0.3	mA
					mA
$C_{ies}$	$V_{CE} = 25\text{ V}$		1.95		nF
$C_{oes}$	$V_{GE} = 0\text{ V}$		0.16		nF
$C_{res}$			0.12		nF
$Q_G$	- 8 V...+ 15 V		200		nC
$R_{Gint}$	$T_j = 25^\circ\text{C}$		0.00		Ω
$t_{d(on)}$	$V_{CC} = 600\text{ V}$	$T_j = 150^\circ\text{C}$	30		ns
$t_r$	$I_C = 35\text{ A}$	$T_j = 150^\circ\text{C}$	35		ns
$E_{on}$	$R_{Gon} = 18\ \Omega$	$T_j = 150^\circ\text{C}$	4.3		mJ
$t_{d(off)}$	$R_{Goff} = 18\ \Omega$	$T_j = 150^\circ\text{C}$	300		ns
$t_f$		$T_j = 150^\circ\text{C}$	55		ns
$E_{off}$	$V_{GE} = +15/-15\text{ V}$	$T_j = 150^\circ\text{C}$	3.25		mJ
$R_{th(j-s)}$	per IGBT		1		K/W
<b>Chopper - IGBT</b>					
$V_{CE(sat)}$	$I_C = 35\text{ A}$ $V_{GE} = 15\text{ V}$ chiplevel	$T_j = 25^\circ\text{C}$	1.85	2.10	V
		$T_j = 150^\circ\text{C}$	2.25	2.45	V
$V_{CE0}$		$T_j = 25^\circ\text{C}$	0.8	0.9	V
		$T_j = 150^\circ\text{C}$	0.7	0.8	V
$r_{CE}$	$V_{GE} = 15\text{ V}$	$T_j = 25^\circ\text{C}$	30	34	mΩ
		$T_j = 150^\circ\text{C}$	44	47	mΩ
$V_{GE(th)}$	$V_{GE} = V_{CE}\text{ V}, I_C = 1\text{ mA}$	5	5.8	6.5	V
$I_{CES}$	$V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$	$T_j = 25^\circ\text{C}$	0.1	0.3	mA
		$T_j = 150^\circ\text{C}$			mA
$Q_G$	- 8 V...+ 15 V		200		nC
$R_{Gint}$	$T_j = 25^\circ\text{C}$		0.00		Ω

# SKiIP 24NAB12T4V1

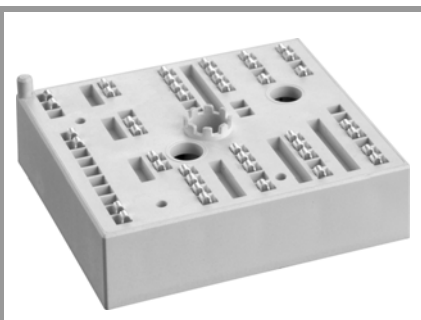

MiniSKiIP® 2

## SKiIP 24NAB12T4V1

### Features


- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

### Typical Applications\*

- Inverter up to 22 kVA
- Typical motor power 11 kW

### Remarks

- $V_{CEsat}$ ,  $V_F$  = chip level value
- Case temp. limited to  $T_C = 125^\circ\text{C}$  max. (for baseplateless modules  $T_C = T_S$ )
- product rel. results valid for  $T_j \leq 150$  (recomm.  $T_{op} = -40 \dots +150^\circ\text{C}$ )

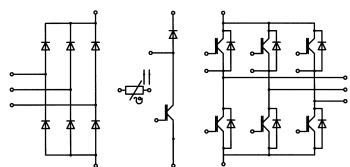

NAB

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
<b>Chopper - IGBT</b>					
$t_{d(on)}$	$V_{CC} = 600\text{ V}$	$T_j = 150^\circ\text{C}$	30		ns
$t_r$	$I_C = 35\text{ A}$	$T_j = 150^\circ\text{C}$	35		ns
$E_{on}$	$R_{G\ on} = 18\ \Omega$	$T_j = 150^\circ\text{C}$	4.3		mJ
	$R_{G\ off} = 18\ \Omega$	$T_j = 150^\circ\text{C}$	300		ns
$t_{d(off)}$		$T_j = 150^\circ\text{C}$	55		ns
$t_f$		$T_j = 150^\circ\text{C}$	3.25		mJ
$E_{off}$	$V_{GE} = +15/-15\text{ V}$	$T_j = 150^\circ\text{C}$			mJ
$R_{th(j-s)}$	per IGBT		1		K/W
<b>Inverse - Diode</b>					
$V_F = V_{EC}$	$I_F = 35\text{ A}$	$T_j = 25^\circ\text{C}$	2.3	2.6	V
	$V_{GE} = 0\text{ V}$ chiplevel	$T_j = 150^\circ\text{C}$	2.3	2.6	V
$V_{F0}$		$T_j = 25^\circ\text{C}$	1.3	1.5	V
		$T_j = 150^\circ\text{C}$	0.9	1.1	V
$r_F$		$T_j = 25^\circ\text{C}$	29	32	m $\Omega$
		$T_j = 150^\circ\text{C}$	40	43	m $\Omega$
$I_{RRM}$	$I_F = 35\text{ A}$	$T_j = 150^\circ\text{C}$	34		A
$Q_{rr}$	$di/dt_{off} = 1250\text{ A}/\mu\text{s}$	$T_j = 150^\circ\text{C}$	5.6		$\mu\text{C}$
$E_{rr}$	$V_{GE} = -15\text{ V}$ $V_{CC} = 600\text{ V}$	$T_j = 150^\circ\text{C}$	2.4		mJ
$R_{th(j-s)}$	per Diode		1.2		K/W
<b>Freewheeling - Diode</b>					
$V_F = V_{EC}$	$I_F = 35\text{ A}$	$T_j = 25^\circ\text{C}$	2.3	2.6	V
	$V_{GE} = 0\text{ V}$ chiplevel	$T_j = 150^\circ\text{C}$	2.3	2.6	V
$V_{F0}$		$T_j = 25^\circ\text{C}$	1.3	1.5	V
		$T_j = 150^\circ\text{C}$	0.9	1.1	V
$r_F$		$T_j = 25^\circ\text{C}$	29	32	m $\Omega$
		$T_j = 150^\circ\text{C}$	40	43	m $\Omega$
$I_{RRM}$	$I_F = 35\text{ A}$	$T_j = 150^\circ\text{C}$	34		A
$Q_{rr}$	$di/dt_{off} = 1250\text{ A}/\mu\text{s}$	$T_j = 150^\circ\text{C}$	5.6		$\mu\text{C}$
$E_{rr}$	$V_{GE} = -15\text{ V}$ $V_{CC} = 600\text{ V}$	$T_j = 150^\circ\text{C}$	2.4		mJ
$R_{th(j-s)}$	per Diode		1.2		K/W
<b>Rectifier - Diode</b>					
$V_F = V_{EC}$	$I_F = 13\text{ A}$	$T_j = 25^\circ\text{C}$	1	1.21	V
	$V_{GE} = 0\text{ V}$ chiplevel	$T_j = 125^\circ\text{C}$		1.1	V
$V_{F0}$		$T_j = 25^\circ\text{C}$		1.0	V
		$T_j = 125^\circ\text{C}$		0.8	V
$r_F$		$T_j = 25^\circ\text{C}$	9.2	18	m $\Omega$
		$T_j = 125^\circ\text{C}$		21	m $\Omega$
$R_{th(j-s)}$	per Diode		1.25		K/W
<b>Module</b>					
$M_s$	to heat sink		2	2.5	Nm
$w$			65		g
<b>Temperatur Sensor</b>					
$R_{100}$	$T_r = 100^\circ\text{C}$ , tolerance = 3 %		1670 $\pm$ 3%		$\Omega$
$R(T)$	$R(T) = 1000\ \Omega [1 + A(T - 25^\circ\text{C}) + B(T - 25^\circ\text{C})^2]$ $A = 7.635 \cdot 10^{-3}\ \text{C}^{-1}$ , $B = 1.731 \cdot 10^{-5}\ \text{C}^{-2}$				

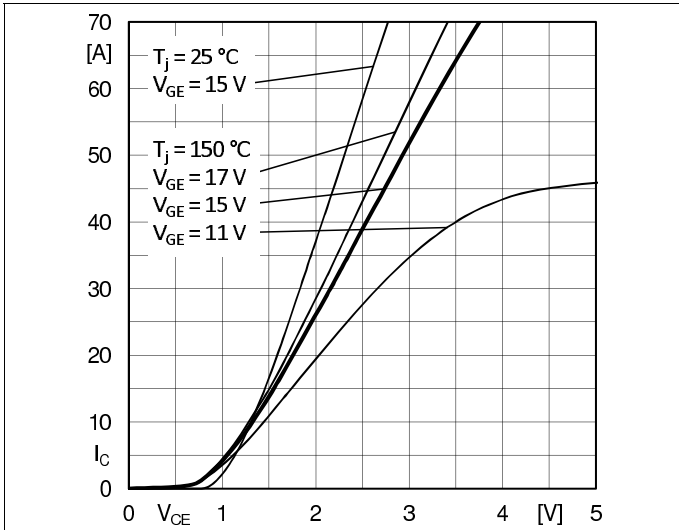


Fig. 1: Typ. output characteristic

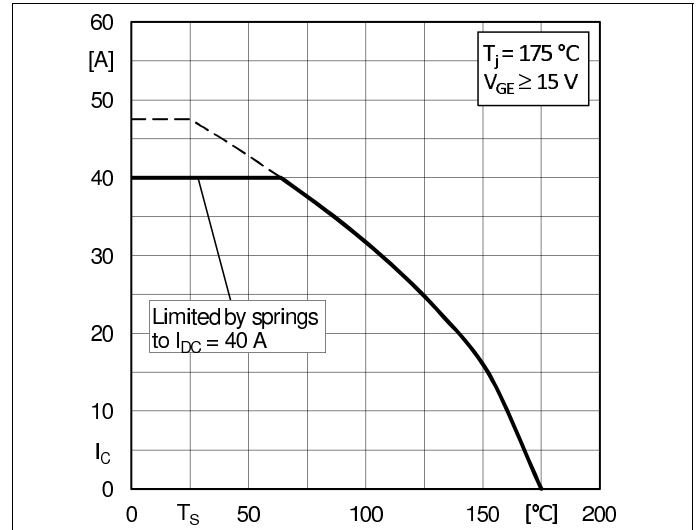


Fig. 2: Typ. rated current vs. temperature  $I_C = f(T_s)$

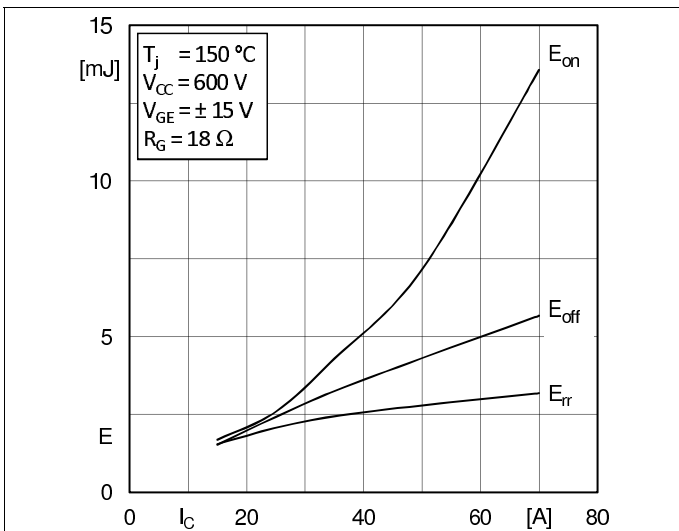


Fig. 3: Typ. turn-on /-off energy =  $f(I_C)$

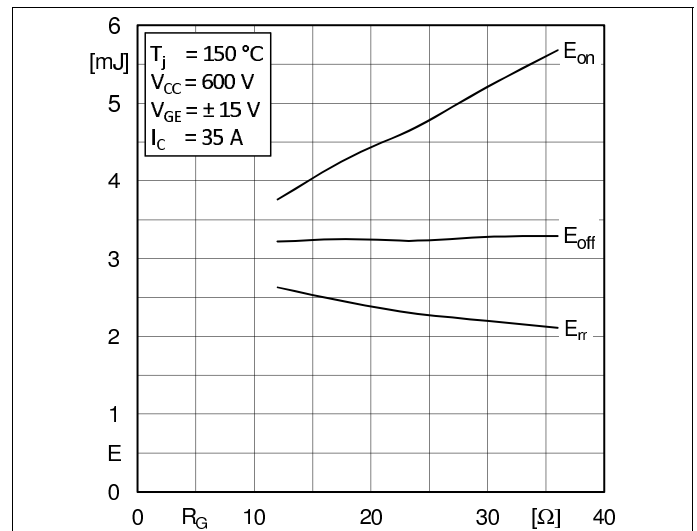


Fig. 4: Typ. turn-on /-off energy =  $f(R_G)$

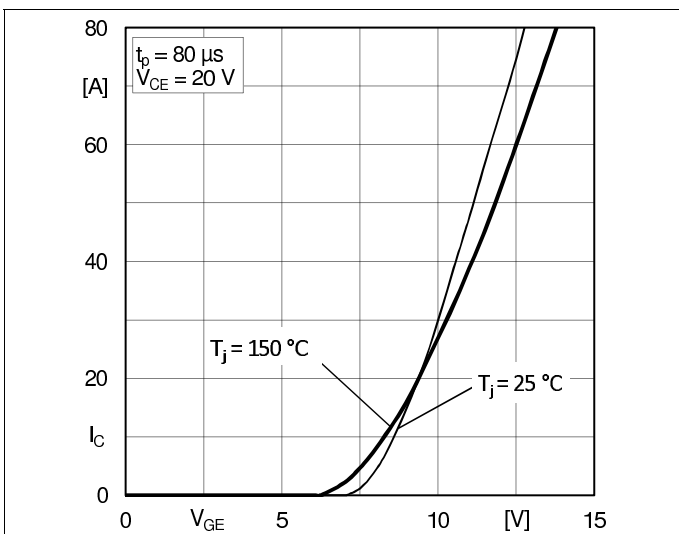


Fig. 5: Typ. transfer characteristic

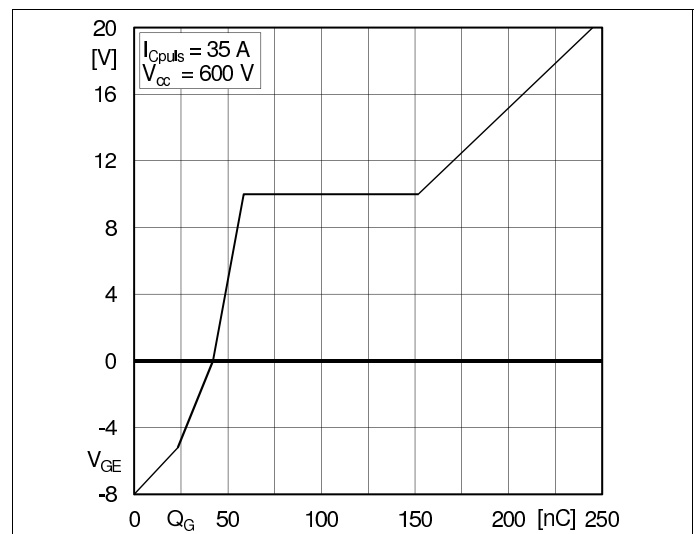


Fig. 6: Typ. gate charge characteristic

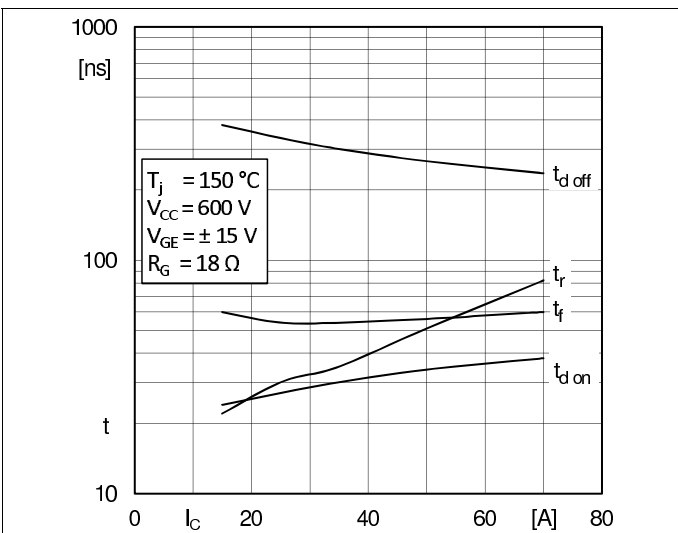


Fig. 7: Typ. switching times vs.  $I_C$

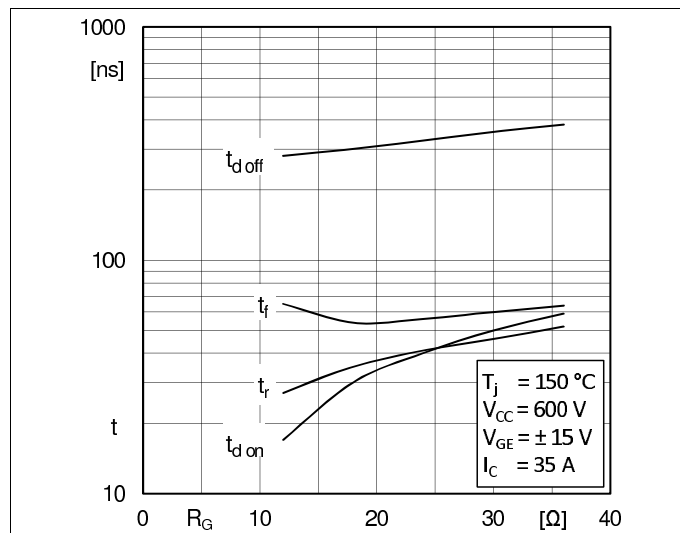


Fig. 8: Typ. switching times vs. gate resistor  $R_G$

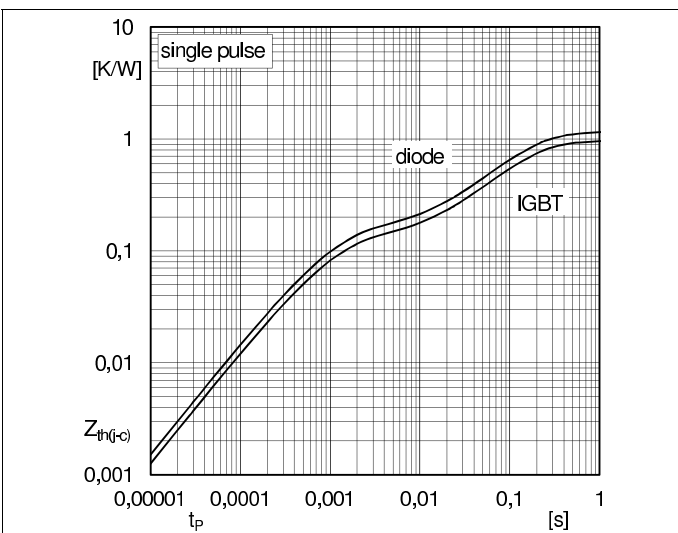


Fig. 9: Transient thermal impedance of IGBT and Diode

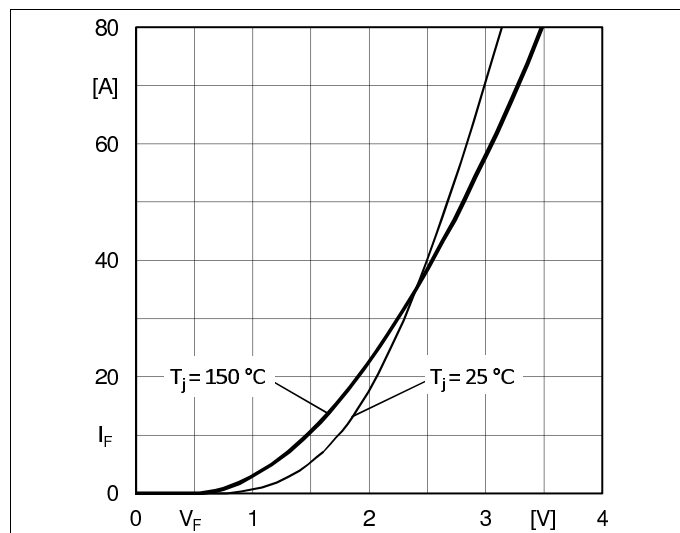


Fig. 10: CAL diode forward characteristic

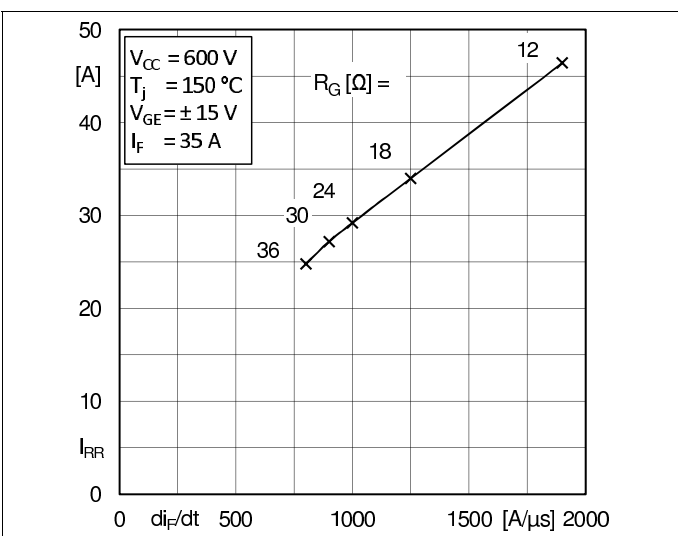


Fig. 11: Typ. CAL diode peak reverse recovery current


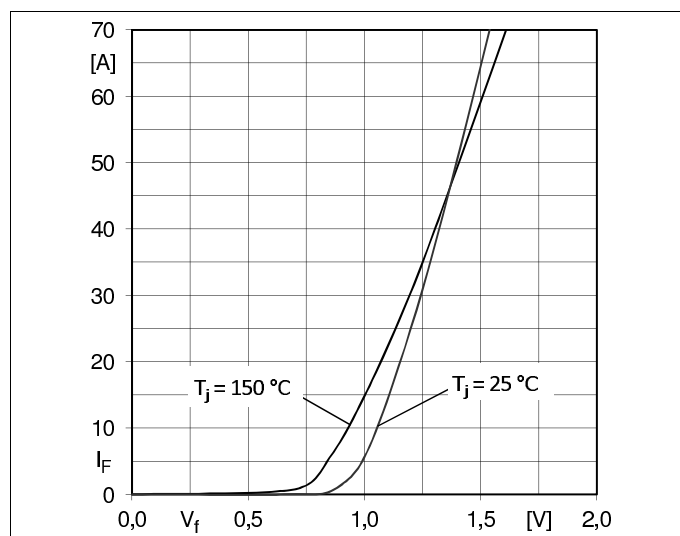


Fig. 12: Typ. input bridge forward characteristic

# SKiiP 24NAB12T4V1

PCB  
PCB TOP-VIEW

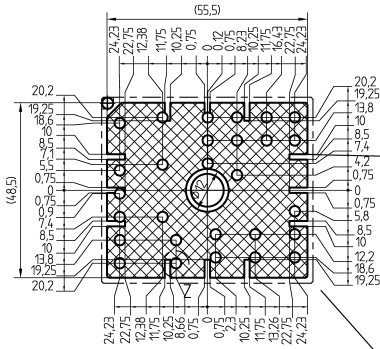


Only for the standard pressure part:  
Accessible for mounting of SMD (max height 3,5) on PCB by customer

mounting area


Z  
M 2:1  
 $\phi 2,9$

PRESSURE PIN AREA


MiniSKiiP 2

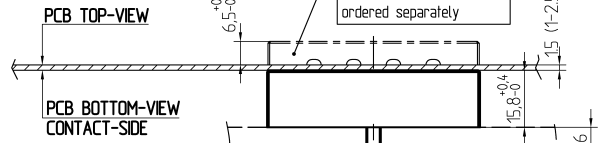

PCB BOTTOM-VIEW CONTACT-SIDE

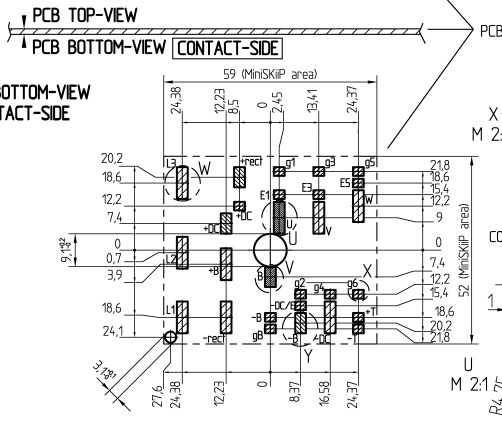


For mounting please follow the assembly instruction



measure: mm  
tolerance: ISO 2768-f

These documents are Semikron property. Semikron reserves all copyrights. All copying and transmitting of this information requires written permission. For the case of industrial property rights, Semikron reserves all rights.

## pinout, dimensions

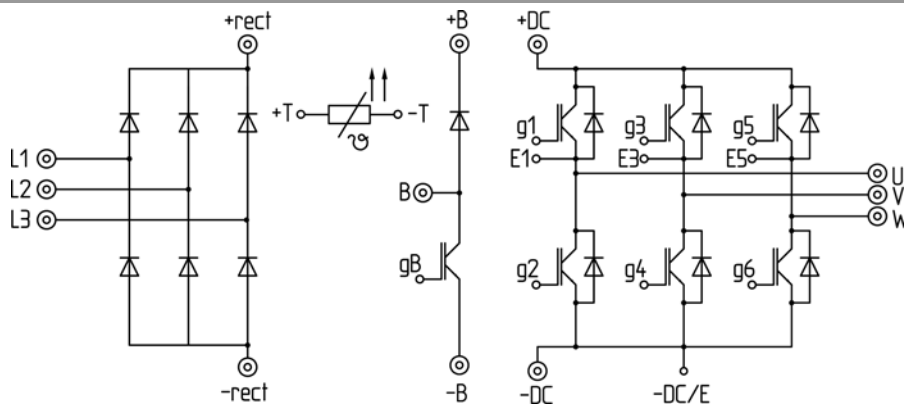

⊙ power connector  
• control connector

## pinout

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.