

# SKKD 150F, SKMD 150F, SKND 150F THYRISTOR



**SEMIPACK® 2**

## Fast Diode Modules

**SKKD 150F**

**SKMD 150F**

**SKND 150F**


## Features

- CAL (controlled axial lifetime) technology, patent No. DE 43 10 44
- Heat transfer through ceramic isolated metal baseplate
- Very short recovery times
- Soft recovery
- Low switching losses
- SKKD half bridge connection
- centre tap connections: SKMD common cathode SKND common anode
- UL recognized, file no. E 63 532

## Typical Applications\*

- Self-commutated inverters
- DC choppers
- AC motor speed control
- inductive heating
- Uninterruptible power supplies
- Electronic welders
- General power switching applications

$V_{RSM}$ V 1200	$V_{RRM}$ V 1200	$I_{FRMS} = 220 \text{ A}$ (maximum value for continuous operation) $I_{FAV} = 150 \text{ A}$ (sin. 180; 50 Hz; $T_c = 54^\circ\text{C}$ ) SKKD 150F12	SKMD 150F12	SKND 150F12
<b>Symbol</b>	<b>Conditions</b>	<b>Values</b>	<b>Units</b>	
$I_{FAV}$	sin. 180; $T_c = 85$ (100) $^\circ\text{C}$	117 (99)	A	
$I_{FSM}$	$T_{vj} = 25^\circ\text{C}; 10 \text{ ms}$ $T_{vj} = 150^\circ\text{C}; 10 \text{ ms}$	2000 1800	A A	
$i^2t$	$T_{vj} = 25^\circ\text{C}; 8,3 \dots 10 \text{ ms}$ $T_{vj} = 150^\circ\text{C}; 8,3 \dots 10 \text{ ms}$	20000 16200	$\text{A}^2\text{s}$ $\text{A}^2\text{s}$	
$V_F$	$T_{vj} = 25^\circ\text{C}; I_F = 150 \text{ A}$	max. 2,2	V	
$V_{(TO)}$	$T_{vj} = 150^\circ\text{C}$	max. 1,2	V	
$r_T$	$T_{vj} = 150^\circ\text{C}$	max. 5,5	$\text{m}\Omega$	
$I_{RD}$	$T_{vj} = 25^\circ\text{C}; V_{RD} = V_{RRM}$	max. 1	mA	
$I_{RD}$	$T_{vj} = 150^\circ\text{C}; V_{RD} = V_{RRM}$	max. 40	mA	
$Q_{rr}$	$T_{vj} = 125^\circ\text{C}, I_F = 150 \text{ A}, -di/dt = 1000 \text{ A}/\mu\text{s}, V_R = 600 \text{ V}$	21 80 710 4,5	$\mu\text{C}$ A ns mJ	
$R_{th(j-c)}$	per diode / per module	0,2 / 0,1	K/W	
$R_{th(c-s)}$	per diode / per module	0,1 / 0,05	K/W	
$T_{vj}$		- 40 ... + 150	$^\circ\text{C}$	
$T_{stg}$		- 40 ... + 125	$^\circ\text{C}$	
$V_{isol}$	a.c. 50 Hz; r.m.s.; 1 s / 1 min.	4800 / 4000	V~	
$M_s$	to heatsink	5 ± 15%	Nm	
$M_t$	to terminals	5 ± 15 %	Nm	
$a$		5 * 9,81	$\text{m}/\text{s}^2$	
$m$	approx.	160	g	
Case	SKKD SKMD SKND	A 53 A 51 A 52		

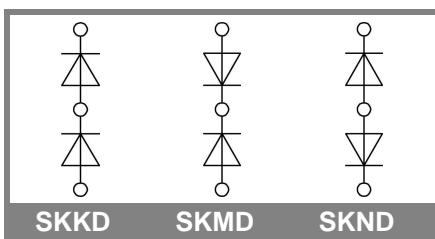

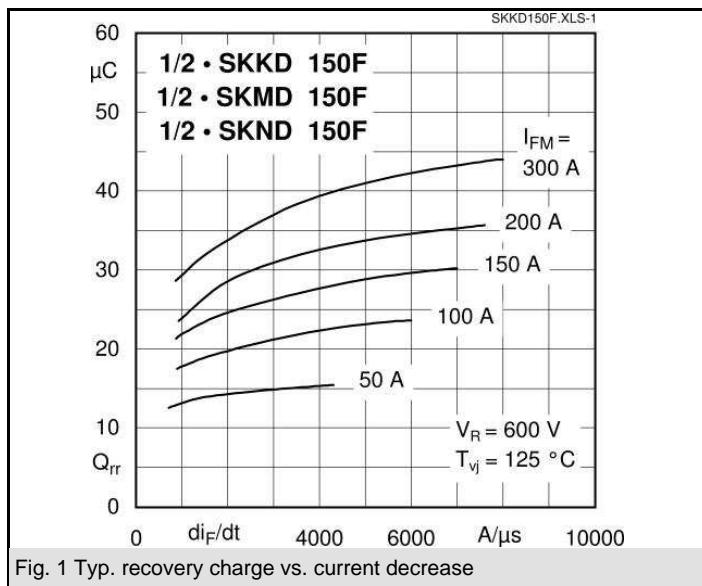


Fig. 1 Typ. recovery charge vs. current decrease

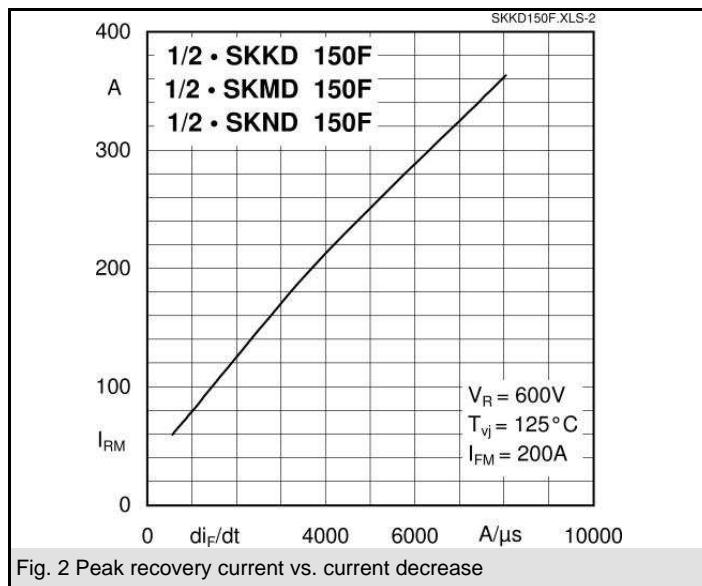


Fig. 2 Peak recovery current vs. current decrease

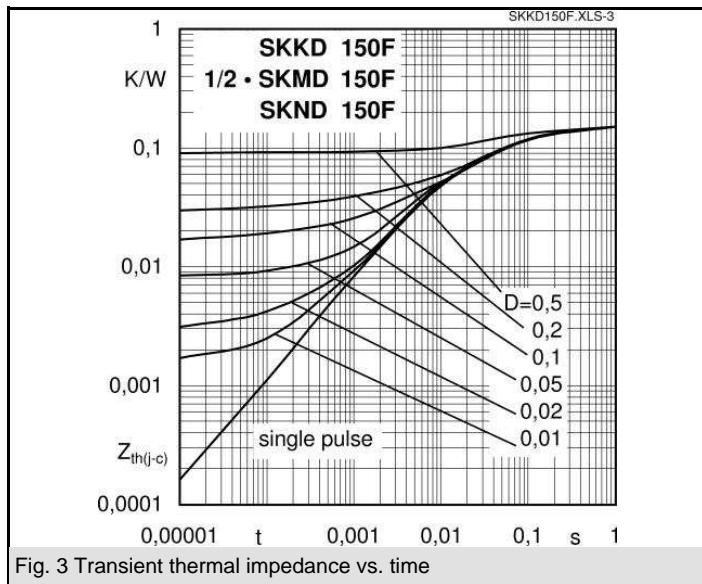


Fig. 3 Transient thermal impedance vs. time

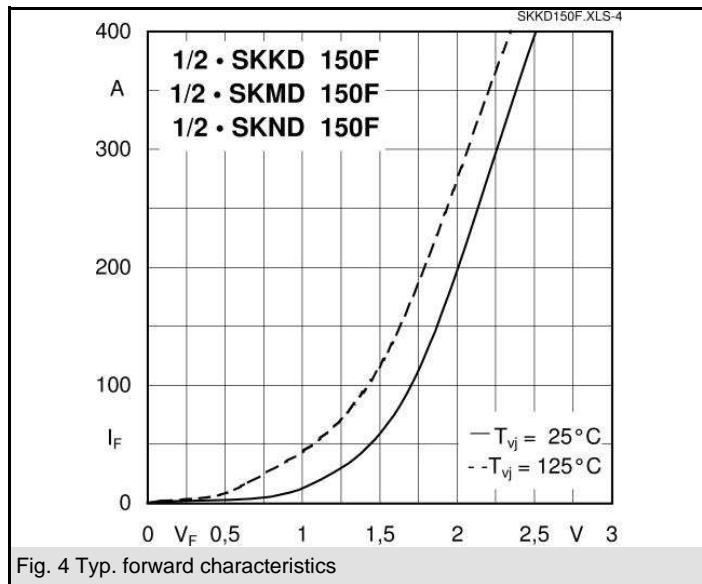


Fig. 4 Typ. forward characteristics

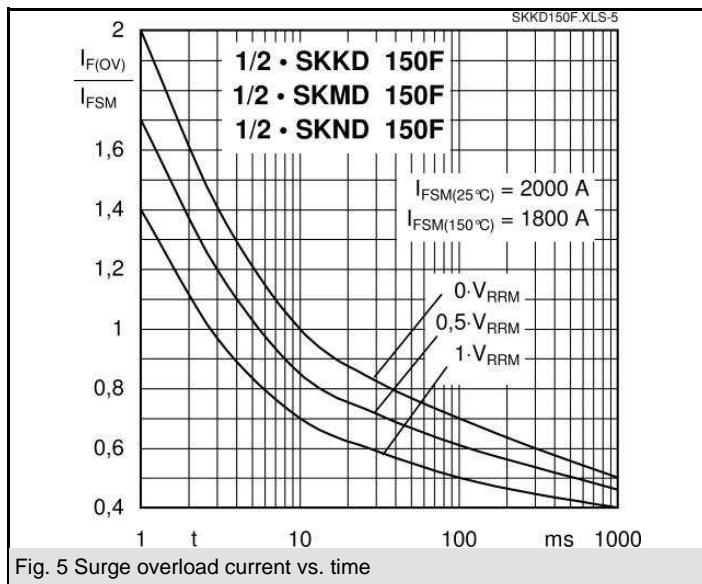


Fig. 5 Surge overload current vs. time






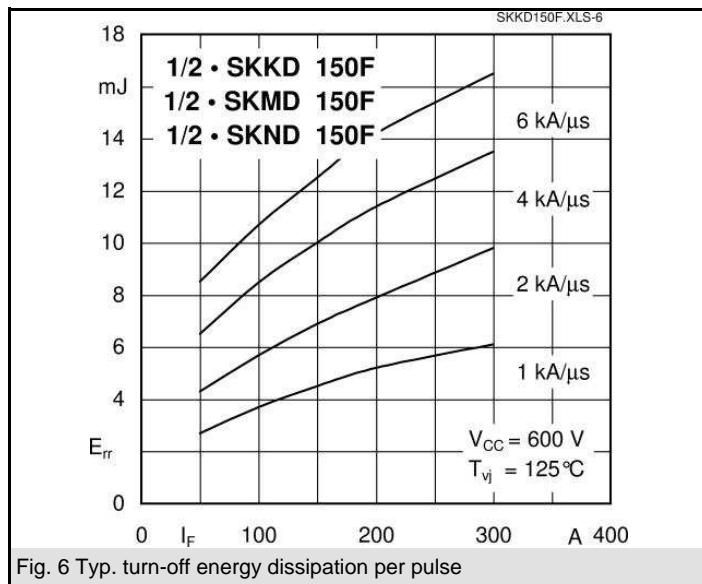


Fig. 6 Typ. turn-off energy dissipation per pulse

# SKKD 150F, SKMD 150F, SKND 150F THYRISTOR

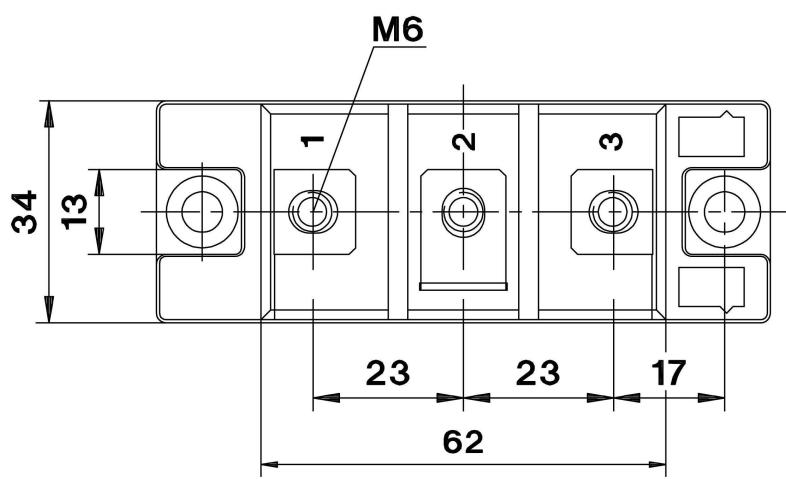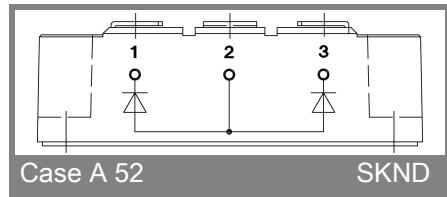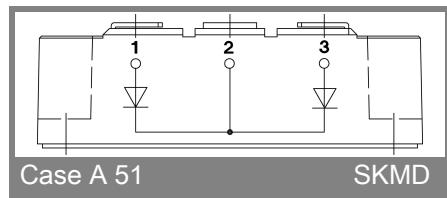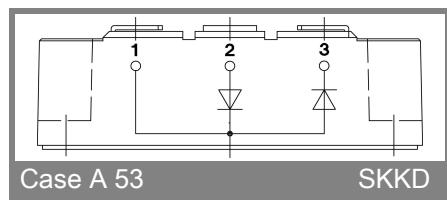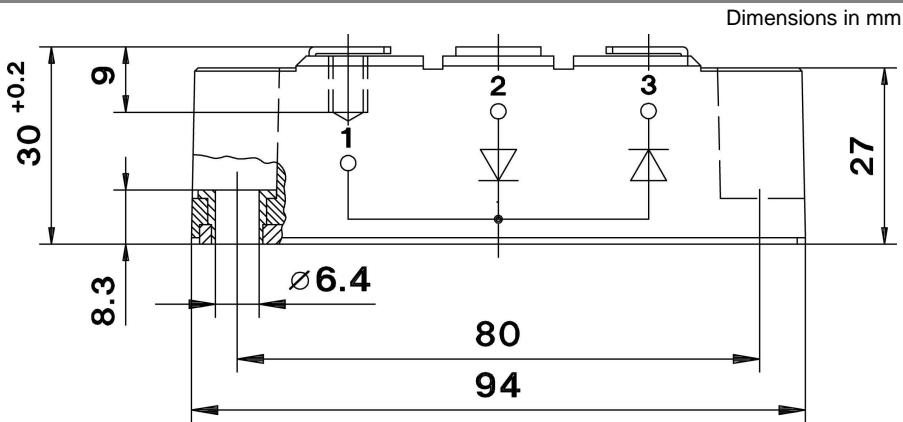

Case A 53

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.