



INSTALLATION AND OPERATION MANUAL

EZ-VM14

Model numbers:
EZ-VM14 includes power supply with North American plug
EZ-VM14X includes worldwide power supply (specify plug)

VGA/XGA Distribution Amplifier



RDL EZ Series products provide the highest level of value to A/V professionals and A/V users who demand professional quality. For long-term performance, quality and value, you have made the EZ choice. EZ products are made in the USA by RDL, the inventor of application-specific modules bringing decades of experience as the world's leading manufacturer of high-reliability performance products to the A/V industry. Visit the RDL website for hundreds of professional A/V products made in the USA by RDL.



www.rdl.net.com

Decades of Performance, Quality and Value

RDL • 659 N. 6th Street • Prescott, AZ • USA 86301 • Sales: 800-281-2683 • 928-443-9391
Tech Support: 800-933-1780 • 928-778-3554 • RDL Europe Sales & Support: (31) 20-6238-983


EZ-VM14

VGA/XGA Distribution Amplifier

- Input and Four Outputs on HD15 Female Connectors
- Wide RGB Bandwidth > 360 MHz Loaded
- High Resolution Compatibility VGA through QXGA
- Reliable Full-Size Front-Panel Switch for ID Bit Selection
- NORM ID BIT Connects LOCAL MONITOR and INPUT ID
- DC RGB Coupling, Output Polarity & Offset Follow Input
- HD15 Input Cable Included - 36", 91.44 cm long

The EZ-VM14 is a high-resolution computer video distribution amplifier with four outputs. The input has an associated front-panel BIT ID switch to assure compatibility with various computers. The four outputs are driven by video line amplifiers that provide flat, wideband response. The EZ-VM14 is used in houses of worship, restaurants, clubs, meeting rooms, class rooms, conference rooms, stores and in commercial A/V systems.

TYPICAL APPLICATION

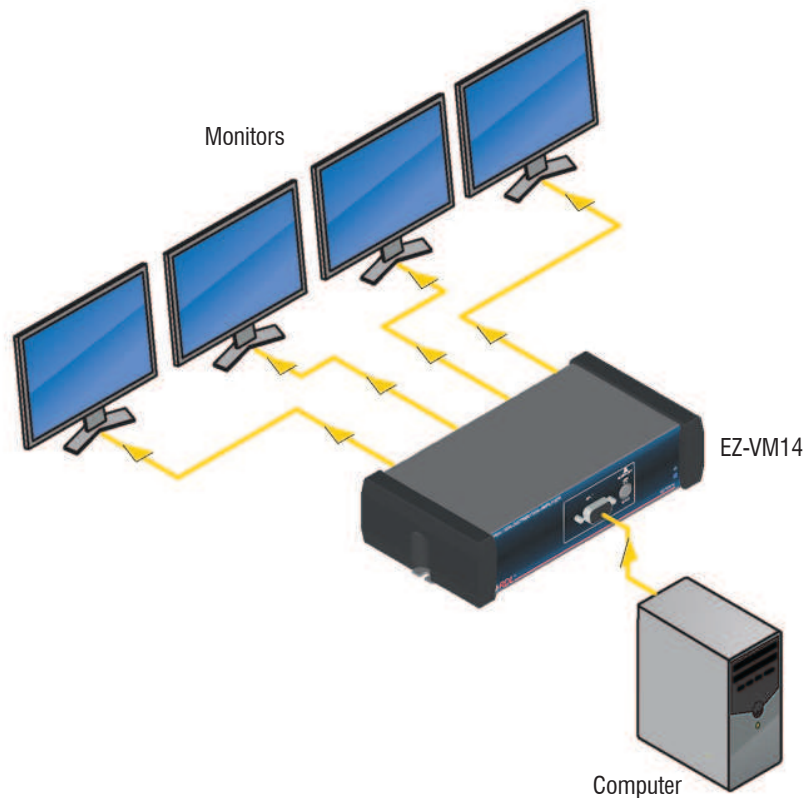

www.rdl.net.com . . . www.rdlez.com

ID BIT


Set to NORM OFF position (button OUT) unless computer video output fails to operate with the connected monitors; set switch to ON position (button IN) if needed to activate computer video monitor output (not typically required unless using certain laptops).

VIDEO INPUT

Connect the video source to the INPUT jack.

POWER INDICATOR

Glow blue when the product is connected to a valid power source.

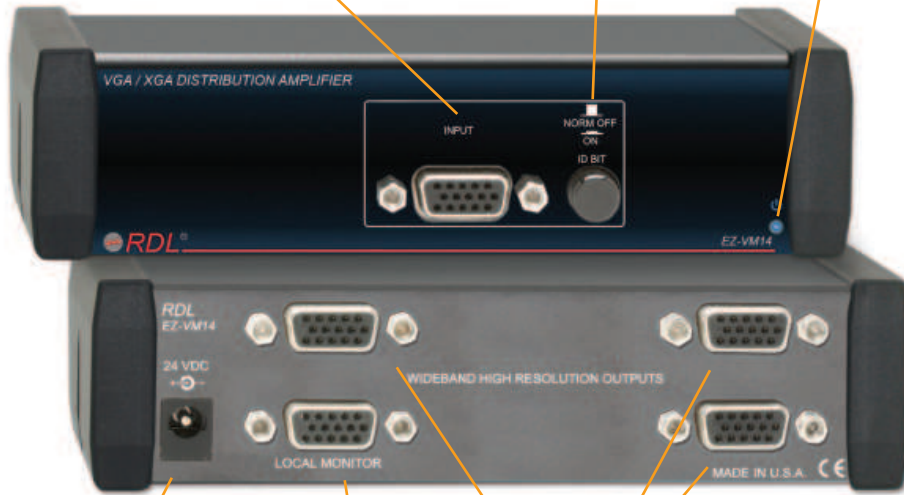

24 VDC POWER INPUT

Insert plug from power supply. Rotate 1/4 turn clockwise to lock.

LOCAL MONITOR OUTPUT


Connect the LOCAL MONITOR output to the input of the local computer video monitor (if used) or to the video input of any monitor or projector.

MONITOR OUTPUTS

Connect to the video inputs of 1, 2 or 3 monitors or projectors.

FOR BEST PICTURE QUALITY, REMOTE VIDEO MONITOR "OPTIMIZATION" FUNCTION SHOULD BE RUN, IF PROVIDED.

POWER CONNECTION



Insert Power Plug

Rotate 1/4-turn clockwise to lock.


Rotate 1/4-turn counter-clockwise to unlock.

FIXED MOUNTING



Screw directly to flat surface without installing rubber feet.

RUBBER FEET ATTACHMENT



Recess

Bottom View of chassis

Peel backing and stick the 4 rubber feet to chassis in recesses provided.

SELECTED MOUNTING ACCESSORIES Complete accessory listing available at: rdlez.com

EZ-RA6

Rack Adapter for 6 Increments of 1/6 Rack Width



EZ-CC6

Component Chassis for 6 Increments of 1/6 Rack Width



EZ-SMB2

Surface Mount Bezel for 1/3 Rack Width Products



EZ-DC2

Desktop Chassis 1/3 Rack Width



EZ-UCB2

Under-Counter Brackets 1/6 or 1/3 Rack Width



EZ-SD2

Storage Drawer 1/3 Rack Width

Use In Place of Filler Panel
Holds Adapters and Cables
Mounts in EZ-CC6 and EZ-RA6



TYPICAL PERFORMANCE

Input: VGA - QXGA RGBHV or RGB with combined sync
Outputs (4): LOCAL MONITOR (1, ID bit pass-thru to INPUT), OUTPUTS (3)
Gain: Unity
Video bandwidth: > 360 MHz
Video impedance: 75 Ω (Input and output)
Sync (HV) input: 500 Ω TTL 0.7 V to 5 V p-p
Sync (HV) output: 5V TTL
Sync (HV) Propagation delay: < 4 nS typ.
Sync (HV) Rise time: < 4 nS typ.
Sync (combined): Output follows input
Bit Control: Switch-selectable (Pin 4, over-rides LOCAL MONITOR jack ID bit pass-thru)
24 Vdc power supply current: 50 mA (idle), 70 mA (max.)
Power supply input voltage: 100 to 240 VAC
Warranty: 3 Years; contact RDL technical support department for assistance
Case dimensions: 5.75" (14.6 cm)W x 3" (7.6 cm)D
Mounting size: 1/3 rack width

CE

891-1552

Copyright © 2009 Radio Design Labs, Inc. RDL, Radio Design Labs and the RDL logo are registered trademarks of Radio Design Labs, Inc. Data reflects product at publication time, subject to change without notice. "Made in USA" applies to all EZ products except power supplies.