


# LFWLT300-CK COVER KIT

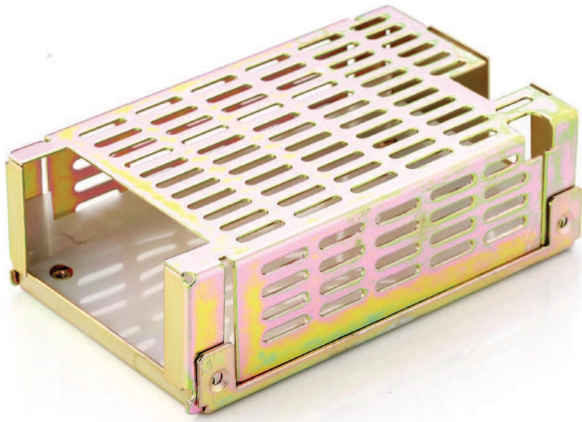

## Features

- Noncorrosive
- Easy assembly
- Low weight
- Fully safe

## FOR WLT300, MWLT300 SERIES

### Derating Guidelines

WLT300/MWLT300: Ambient > 30°C, derate by 1.3 W/°C to 40°C. 25 CFM recommended to circulate air

### Contents

Mounting Base, Cover, Insulator, Fixing Screws

### Mechanical Dimensions

Cover and Base Material EG (Zintec) / CRC (Powder coating/Passivation), 1.0 mm

Marked A: PCB MTG; B: COVER MTG; C: SYSTEM MTG

All dimensions are in mm. General tolerance : +/-0.5

## Mechanical Drawing

