

# BY550-50 ~ BY550-1000

**PRV : 50 - 1000 Volts**  
**Io : 5.0 Amperes**

## FEATURES :


- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : DO-201AD Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.929 grams

## SILICON RECTIFIER DIODES

### DO - 201AD

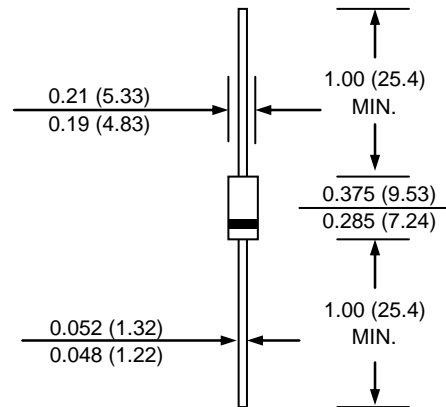

Dimensions in inches and ( millimeters )

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.


RATING	SYMBOL	BY550 - 50	BY550 - 100	BY550 - 200	BY550 - 400	BY550 - 600	BY550 - 800	BY550 - 1000	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375"(9.5mm) Lead Length $T_a = 60^{\circ}C$	$I_F$	5.0							A
Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	300							A
Maximum Forward Voltage at $I_F = 5.0$ Amps.	$V_F$	1.1							V
Maximum DC Reverse Current $T_a = 25^{\circ}C$ at rated DC Blocking Voltage $T_a = 100^{\circ}C$	$I_R$	20							$\mu A$
	$I_{R(H)}$	50							$\mu A$
Typical Junction Capacitance (Note1)	$C_J$	50							pF
Typical Thermal Resistance (Note2)	$R_{\theta JA}$	18							$^{\circ}C/W$
Junction Temperature Range	$T_J$	- 65 to + 175							$^{\circ}C$
Storage Temperature Range	$T_{STG}$	- 65 to + 175							$^{\circ}C$

### Notes :


- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
- (2) Thermal resistance from Junction to Ambient at 0.375" (9.5mm) Lead Lengths, P.C. Board Mounted.

**RATING AND CHARACTERISTIC CURVES ( BY550-50 - BY550-1000 )**


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

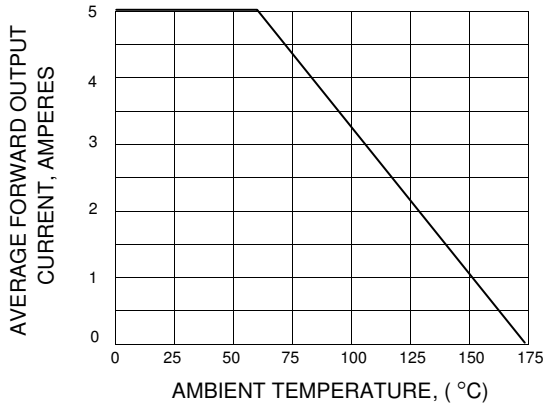


**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

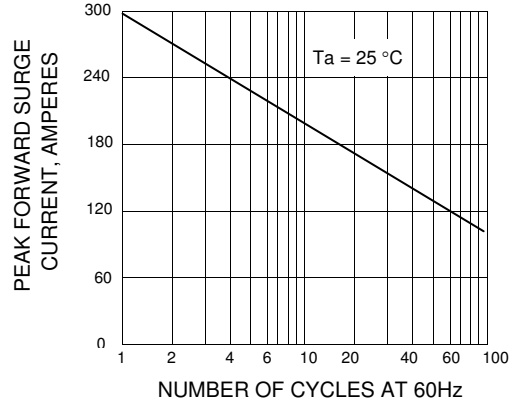

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

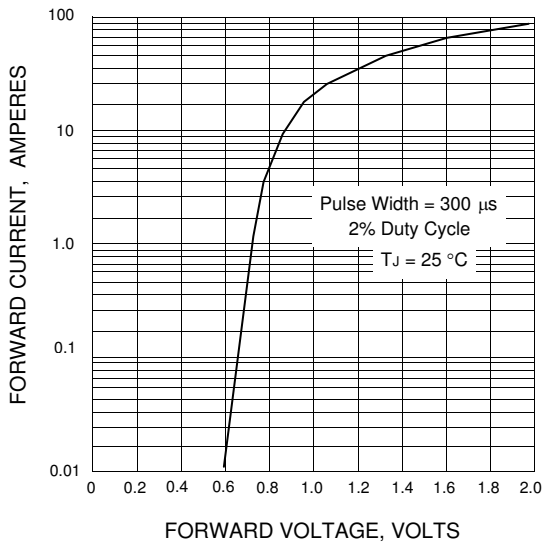

**FIG.4 - TYPICAL JUNCTION CAPACITANCE**

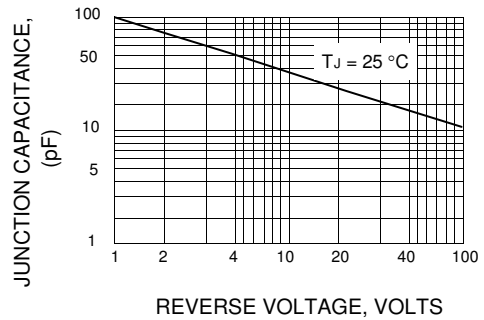

**FIG.5 - TYPICAL REVERSE CHARACTERISTICS**

