



|                                |  |
|--------------------------------|--|
| Type code                      | SDPB-40A-0007                          |
| Ident no.                      | 6824052                                |
| Operating / load voltage       | 20...29 VDC                            |
| Operating current              | ≤ 140 mA                               |
| Fieldbus transmission rate     | 9.6 kbps ... 12 Mbps                   |
| Fieldbus addressing            | 0 to 99                                |
| Service interface              | parameterisation via I/O-ASSISTANT     |
| Electrical isolation           | Fieldbus to operational voltage        |
| Number of channels             | 4 analogue inputs 20 mA                |
| Input resistance               | 80 Ω                                   |
| Electrical isolation           | channels to operational voltage        |
| Common mode voltage            | max. 35 V                              |
| Measuring current              | 0.5 mA                                 |
| Conversion time                | 250 ms                                 |
| Relative measuring error       | <+- 0.3 % of full scale                |
| Input filter                   | variable                               |
| Sensor supply                  | from load voltage                      |
| Dimensions (W x L x H)         | 30x175x26.5mm                          |
| Operating temperature          | 0...+55 °C                             |
| Storage temperature            | -25 to 85 °C                           |
| Vibration test                 | as per EN 60068-2-6                    |
| Shock test                     | acc. to DIN EN 60068-2-27              |
| Electro-magnetic compatibility | according to EN 61000-6-2/EN 61000-6-4 |
| Protection class               | IP67                                   |
| Approvals                      | CE, cULus                              |

- 4 analogue inputs 0(4)...20 mA
- Configuration interface
- Parametrizable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Fibre-glass reinforced housing
- Shock and vibration tested
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67


#### Fieldbus M12 x 1




#### input M12 x 1

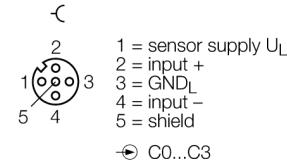

#### Connection - Inputs

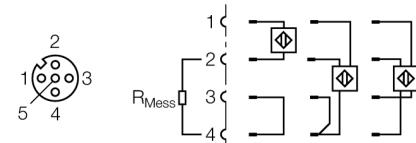

#### Voltage supply M8 x 1

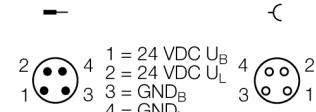

## Data in process image

Valid for the setting "Motorola format"

SBn: Status byte channel n  
 CBn: Control byte channel n  
 Chn D0: channel n,  
     least significant data byte  
 Chn D1: channel n,  
     most significant data byte

| Address  | Input data |           | Output data |           |
|----------|------------|-----------|-------------|-----------|
|          | Word       | High-Byte | Low-Byte    | High-Byte |
| <b>0</b> | Ch0 D1     | SB0       | Ch0 D1      | CB0       |
| <b>1</b> | SB1        | Ch0 D0    | CB1         | Ch0 D0    |
| <b>2</b> | Ch1 D0     | Ch1 D1    | Ch1 D0      | Ch1 D1    |
| <b>3</b> | Ch2 D1     | SB2       | Ch2 D1      | CB2       |
| <b>4</b> | SB3        | Ch2 D0    | CB3         | Ch2 D0    |
| <b>5</b> | Ch3 D0     | Ch3 D1    | Ch3 D0      | Ch3 D1    |