




Compact I/O module for DeviceNet™
8 digital PNP inputs
FDNL-S0800-T

- 8 digital pnp inputs
- Short-circuit monitoring
- Module-related diagnostics
- One channel per connector
- Fibre-glass reinforced PA6 housing
- Vibration and shock-resistant
- Encapsulated module electronics
- Metal connector
- Protection class IP67

Fieldbus



input M12 x 1

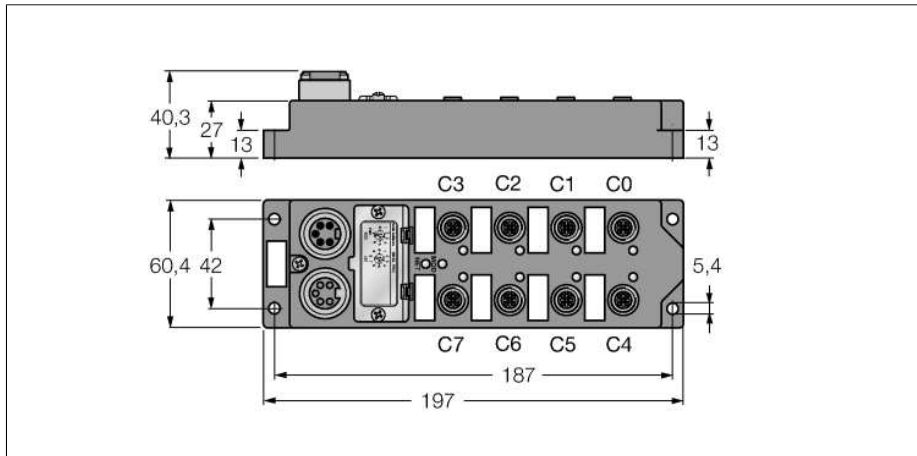

Type code	FDNL-S0800-T
Ident no.	6603336
Operating / load voltage	11...26 VDC
Operating current	< 50 mA
Fieldbus transmission rate	125...500 kbps
Fieldbus addressing	0...63 (decimal) via coded rotary switches
Inputs	
Number of channels	(8) 3-wire pnp sensors
Input voltage	13...26 VDC
Supply current	< 700 mA per module, short-circuit proof
Switching threshold	EN 61131-3
	low max.: 1.5 mA / high min.: 2 mA
Input delay	2.5 ms
Switching frequency	≤ 100 Hz
Max. input current	7 mA
Electrical isolation	galvanic isolation against the bus
Sensor supply	bus connection
Electrical isolation	to operating and load voltage
Dimensions (W x L x H)	60.4x197x27mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Operating temperature	-40...+70 °C
Protection class	IP67
Approvals	CE, UL, CSA, FM

Compact I/O module for DeviceNet™
8 digital PNP inputs
FDNL-S0800-T

TURCK

Industrial
Automation

Data in process image

C1P4: Male Connector 1, 4-pole

IGS: Wire-break/ short circuit - group signal

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input	Byte 0	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
	Byte 1	IGS	-	-	-	-	-	-	-