

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size



5.0 x 3.2 x 0.85mm

ASFLMB

Moisture Sensitivity Level – MSL 1  RoHS/RoHS II CompliantMEMS  
TECHNOLOGY

## FEATURES:

- Ultra Miniature Pure Silicon™ Clock Oscillator
- 2nd Generation MEMS Technology with reduced jitter by Discera
- Low Power Consumption <10mA
- Exceptional Stability +/- 10ppm Over Temp. at -40 to +105°C, +/- 5ppm over -40 to +85°C
- Available in 30kG Shock Resistance Configuration
- Compact QFN Plastic Packaging

## APPLICATIONS:

- CCD Clock for VTR Camera
- Equipment Connected to PCs
- Low Profile Equipment
- Computers and Peripherals
- Lower Cost Crystal Oscillator Replacement
- Portable Electronics (MP3 Players, Games)
- Consumer Electronics such as TV's, DVR's, etc.
- Vibrant, Shock-Prone & Humid Environments for Industrial Equipment
- Demanding Military & Automotive Electronics

## STANDARD SPECIFICATIONS:

### Common Key Electrical Specifications

| Parameters                      | Minimum  | Typical     | Maximum       | Units    | Notes       |
|---------------------------------|--|-------------|---------------|----------|-------------|
| Frequency Range:                | 1.0  |             | 150           | MHz      |             |
| Operating Temperature:          | 0  |             | +70           | °C       | See options |
| Storage Temperature:            | -55  |             | +150          | °C       |             |
| Overall Frequency Stability*:   | -50  |             | +50           | ppm      | See options |
| Supply Voltage (Vdd):           |  | +1.8 ~ +3.3 |               | V        |             |
| Output Load:                    | 10   |             | 15, 25, or 40 | pF<br>kΩ | See options |
| Symmetry:                       | 45   |             | 55            | %        | @1/2Vdd     |
| Startup Time:                   |  | 1.5         | 3.0           | ms       |             |
| Disable Time:                   |  | 20          | 100           | ns       |             |
| Disable Stand-by Current:       |  |             | 15            | uA       |             |
| Tri-state Function (Stand-by) : | "1" (VIH>0.75*Vdd) or Open: Oscillation<br>"0" (VIL<0.25*Vdd) : Hi Z |             |               | V        |             |
| Aging:                          | -5.0   | ----        | +5.0          | ppm      | First year  |

### Key Electrical Specifications V<sub>dd</sub>= 1.8V

| Parameters                | Minimum             | Typical             | Maximum             | Units             | Notes               |
|---------------------------|---------------------|---------------------|---------------------|-------------------|---------------------|
| Supply Current (no load): | 1.0 to 39.9999MHz   | 5                   | 15                  | mA                | CL=0p<br>RL=∞       |
|                           | 40.0 to 79.9999MHz  | 6                   | 15                  | mA                | T=25°C              |
|                           | 80.0 to 124.9999MHz | 7                   | 15                  | mA                | (Standard CL: 15pF) |
|                           | 125.0 to 150MHz     | 8                   | 15                  | mA                |                     |
|                           | 1.0 to 39.9999MHz   | 6                   | 15                  | mA                | CL=0p<br>RL=∞       |
|                           | 40.0 to 79.9999MHz  | 7                   | 15                  | mA                | T=25°C              |
|                           | 80.0 to 124.9999MHz | 8                   | 15                  | mA                | (CL option: 25pF)   |
|                           | 125.0 to 150MHz     | 9                   | 15                  | mA                |                     |
|                           | 1.0 to 39.9999MHz   | 7                   | 15                  | mA                | CL=0p<br>RL=∞       |
|                           | 40.0 to 79.9999MHz  | 8                   | 15                  | mA                | T=25°C              |
| 80.0 to 124.9999MHz       | 9                   | 15                  | mA                  | (CL option: 40pF) |                     |
| 125.0 to 150MHz           | 10                  | 15                  | mA                  |                   |                     |
| Output Voltage:           | V <sub>OH</sub>     | 0.8*V <sub>dd</sub> |                     | V                 |                     |
|                           | V <sub>OL</sub>     |                     | 0.2*V <sub>dd</sub> | V                 | CL=15, 25, 40pF     |
| Rise Time:<br>Fall Time:  | Tr                  | 1.8                 | 3.0                 | ns                | CL=15pF; T=25°C     |
|                           | Tf                  | 1.0                 | 3.0                 | ns                | 20%/80%*VDD         |
|                           | Tr                  | 1.5                 | 3.0                 | ns                | CL=25pF; T=25°C     |
|                           | Tf                  | 1.2                 | 3.0                 | ns                | 20%/80%*VDD         |
|                           | Tr                  | 1.4                 | 3.0                 | ns                | CL=40pF; T=25°C     |
|                           | Tf                  | 1.1                 | 3.0                 | ns                | 20%/80%*VDD         |
| Cycle to Cycle Jitter:    |                     | 60                  |                     | ps                | F=100MHz            |
| Period Jitter RMS:        |                     | 10                  |                     | ps                | F=100MHz            |

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 05.06.13**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



ASFLMB



RoHS/RoHS II Compliant

Life Size



5.0 x 3.2 x 0.85mm

## Key Electrical Specifications – $V_{dd}=2.5V$

| Parameters                   |                     | Minimum      | Typical | Maximum      | Units | Notes               |
|------------------------------|---------------------|--------------|---------|--------------|-------|---------------------|
| Supply Current<br>(no load): | 1.0 to 39.9999MHz   |              | 6       | 15           | mA    | CL=0p               |
|                              | 40.0 to 79.9999MHz  |              | 7       | 15           | mA    | RL=∞                |
|                              | 80.0 to 124.9999MHz |              | 8       | 15           | mA    | T=25°C              |
|                              | 125.0 to 150MHz     |              | 9       | 15           | mA    | (Standard CL: 15pF) |
|                              | 1.0 to 39.9999MHz   |              | 7       | 15           | mA    | CL=0p               |
|                              | 40.0 to 79.9999MHz  |              | 8       | 15           | mA    | RL=∞                |
|                              | 80.0 to 124.9999MHz |              | 9       | 15           | mA    | T=25°C              |
|                              | 125.0 to 150MHz     |              | 10      | 15           | mA    | (CL option: 25pF)   |
|                              | 1.0 to 39.9999MHz   |              | 8       | 16           | mA    | CL=0p               |
|                              | 40.0 to 79.9999MHz  |              | 9       | 16           | mA    | RL=∞                |
|                              | 80.0 to 124.9999MHz |              | 10      | 16           | mA    | T=25°C              |
|                              | 125.0 to 150MHz     |              | 11      | 16           | mA    | (CL option: 40pF)   |
| Output Voltage:              | $V_{OH}$            | $0.8*V_{dd}$ |         |              | V     |                     |
|                              | $V_{OL}$            |              |         | $0.2*V_{dd}$ | V     | CL=15, 25pF         |
|                              | $V_{OH}$            | $0.9*V_{dd}$ |         |              | V     |                     |
|                              | $V_{OL}$            |              |         | $0.1*V_{dd}$ | V     | CL=40pF             |
| Rise Time:<br>Fall Time:     | $T_r$               |              | 1.0     | 2.0          | ns    | CL=15pF; T=25°C     |
|                              | $T_f$               |              | 0.9     | 2.0          | ns    | 20%/80%*VDD         |
|                              | $T_r$               |              | 1.1     | 2.0          | ns    | CL=25pF; T=25°C     |
|                              | $T_f$               |              | 0.9     | 2.0          | ns    | 20%/80%*VDD         |
|                              | $T_r$               |              | 1.0     | 2.0          | ns    | CL=40pF; T=25°C     |
|                              | $T_f$               |              | 0.9     | 2.0          | ns    | 20%/80%*VDD         |
| Cycle to Cycle Jitter:       |                     |              | 50      |              | ps    | F=100MHz            |
| Period Jitter RMS:           |                     |              | 5       |              | ps    | F=100MHz            |



# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



ASFLMB



RoHS/RoHS II Compliant

Life Size



5.0 x 3.2 x 0.85mm

## Key Electrical Specifications – $V_{dd}=3.3V$

| Parameters                   |                     | Minimum            | Typical | Maximum            | Units | Notes  |
|------------------------------|---------------------|--------------------|---------|--------------------|-------|--|
| Supply Current<br>(no load): | 1.0 to 39.9999MHz   |                    | 7       | 15                 | mA    | CL=0p<br>RL=∞<br>T=25°C<br>(Standard CL: 15pF) |
|                              | 40.0 to 79.9999MHz  |                    | 8       | 15                 | mA    |  |
|                              | 80.0 to 124.9999MHz |                    | 9       | 15                 | mA    |  |
|                              | 125.0 to 150MHz     |                    | 10      | 15                 | mA    |  |
|                              | 1.0 to 39.9999MHz   |                    | 8       | 16                 | mA    | CL=0p<br>RL=∞<br>T=25°C<br>(CL option: 25pF)   |
|                              | 40.0 to 79.9999MHz  |                    | 9       | 16                 | mA    |  |
|                              | 80.0 to 124.9999MHz |                    | 10      | 16                 | mA    |  |
|                              | 125.0 to 150MHz     |                    | 11      | 16                 | mA    |  |
|                              | 1.0 to 39.9999MHz   |                    | 8       | 16                 | mA    | CL=0p<br>RL=∞<br>T=25°C<br>(CL option: 40pF)   |
|                              | 40.0 to 79.9999MHz  |                    | 9       | 16                 | mA    |  |
|                              | 80.0 to 124.9999MHz |                    | 10      | 16                 | mA    |  |
|                              | 125.0 to 150MHz     |                    | 11      | 16                 | mA    |  |
| Output Voltage:              | $V_{OH}$            | $0.8 \cdot V_{dd}$ |         |                    | V     | CL=15pF  |
|                              | $V_{OL}$            |                    |         | $0.2 \cdot V_{dd}$ | V     |  |
|                              | $V_{OH}$            | $0.9 \cdot V_{dd}$ |         |                    | V     | CL=25, 40pF                                    |
|                              | $V_{OL}$            |                    |         | $0.1 \cdot V_{dd}$ | V     |  |
| Rise Time:<br>Fall Time:     | $T_r$               |                    | 1.0     | 2.0                | ns    | CL=15pF; T=25°C<br>20%/80%*VDD                 |
|                              | $T_f$               |                    | 0.9     | 2.0                | ns    |  |
|                              | $T_r$               |                    | 1.0     | 2.0                | ns    | CL=25pF; T=25°C<br>20%/80%*VDD                 |
|                              | $T_f$               |                    | 0.9     | 2.0                | ns    |  |
|                              | $T_r$               |                    | 0.8     | 2.0                | ns    | CL=40pF; T=25°C<br>20%/80%*VDD                 |
|                              | $T_f$               |                    | 0.8     | 2.0                | ns    |  |
| Cycle to Cycle Jitter:       |                     |                    | 50      |                    | ps    | F=100MHz                                       |
| Period Jitter RMS:           |                     |                    | 5       |                    | ps    | F=100MHz                                       |

## Absolute Maximum Ratings

| Item            | Minimum | Maximum      | Unit | Condition |
|-----------------|---------|--------------|------|-----------|
| Supply Voltage  | -0.3    | +4.0         | V    |           |
| Input Voltage   | -0.3    | $V_{dd}+0.3$ | V    |           |
| Junction Temp.  |         | +150         | °C   |           |
| Storage Temp.   | -55     | +150         | °C   |           |
| Soldering Temp. |         | +260         | °C   | 40sec max |
| ESD             |         |              | V    |           |
| HBM             |         | 4,000        |      |           |
| MM              |         | 200          |      |           |
| CDM             |         | 1,500        |      |           |



# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB



Life Size

5.0 x 3.2 x 0.85mm

ASFLMB



RoHS/RoHS II Compliant

## OPTIONS AND PART IDENTIFICATION: (Left Blank if Standard)

### Programmed Orders (Quantity > 1,000pcs)

ASFLMB - [ ] MHz - [ ] - [ ] - [ ]

| Frequency in MHz  |
|---|
| e.g. 14.3181 MHz<br>(Maximum 4 digits<br>after decimal) |

| Operating Temp.    |
|--------------------|
| Blank: 0°C ~ +70°C |
| E: -20°C ~ +70°C   |
| L: -40°C ~ +85°C   |
| X: -40°C ~ +105°C  |

| Overall Freq. Stability |
|-------------------------|
| C: ±50ppm (STD)         |
| Y: ±10ppm               |
| R: ±25 ppm              |

| Output Load |
|-------------|
| Blank: 15pF |
| 25: 25pF    |
| 40: 40pF    |

| Packaging            |
|----------------------|
| Blank*: 72pcs / Tube |
| T: 1,000pcs / reel   |
| T3: 3,000pcs / reel  |

\* For Quick turn-around programmable orders < 1000pcs: Due to the immediate availability of stock and the qty of the order, the parts may be delivered as BULK: Cut Tape, Loose parts in Antistatic Bag or in Tube(s). The MOQ per the series will still apply for Tube packaging.

### Un-Programmed Orders

Blank un-programmed oscillators and our low cost portable programmer are available for quick turn engineering requirements. Please call ABRACON or visit MEMSpeed Pro site <http://www.abracon.com/memspeedpro/memspeedpro.html> for more information.

ASFLMB - BLANK - [ ] - [ ] - [ ] - [ ]

| Operating Temp.    |
|--------------------|
| Blank: 0°C ~ +70°C |
| E: -20°C ~ +70°C   |
| L: -40°C ~ +85°C   |
| X: -40°C ~ +105°C  |

| Overall Freq. Stability |
|-------------------------|
| C: ±50ppm (STD)         |
| Y: ±10ppm               |
| R: ±25 ppm              |

| Output Load |
|-------------|
| Blank: 15pF |
| 25: 25pF    |
| 40: 40pF    |

| Packaging           |
|---------------------|
| Blank: 72pcs / Tube |
| T: 1,000pcs / reel  |
| T3: 3,000pcs / reel |



# PLASTIC PACKAGE INDUSTRIAL GRADE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATOR

ASFLMB


Life Size

5.0 x 3.2 x 0.85mm


ASFLMB

**Pb** RoHS/RoHS II Compliant

## OUTLINE DIMENSIONS:

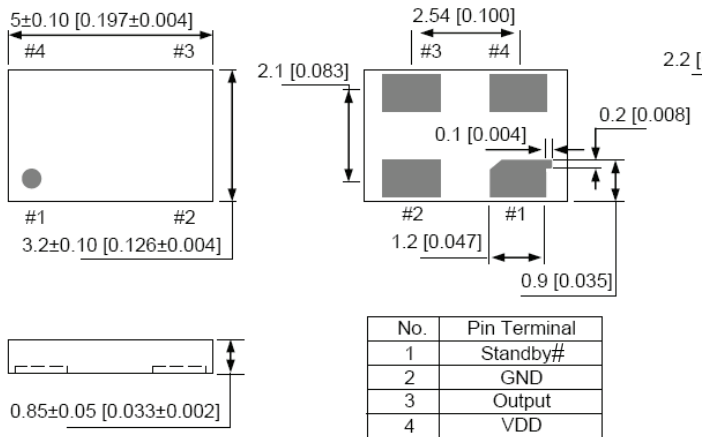


### Recommended Land Pattern

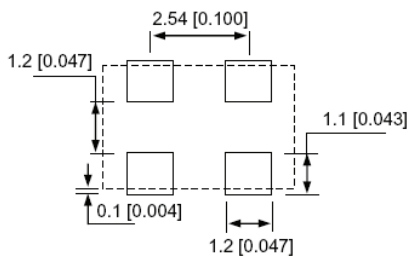

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 2 and 4.

Dimensions: mm (inches)




## REFLOW PROFILE:

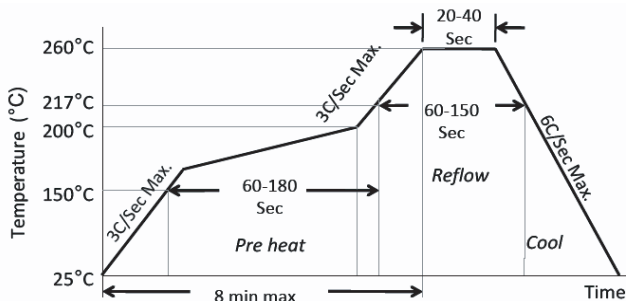

|                                   |              |
|-----------------------------------|--------------|
| Ramp-Up Rate (200°C to Peak Temp) | 3°C/Sec Max. |
| Preheat Time 150°C to 200°C       | 60-180 Sec   |
| Time maintained above 217°C       | 60-150 Sec   |
| Peak Temperature                  | 255-260°C    |
| Time within 5°C of actual Peak    | 20-40 Sec    |
| Ramp-Down Rate                    | 6°C/Sec Max. |
| Time 25°C to Peak Temperature     | 8 min Max.   |

## TAPE AND REEL:

T = 1,000pcs/reel (D=180mm)  
 T3 = 3,000pcs/reel (D=330mm)

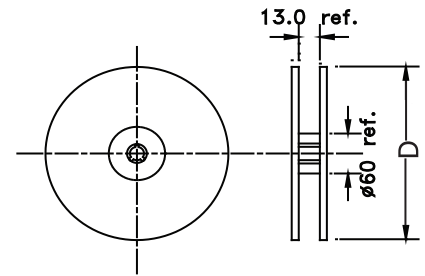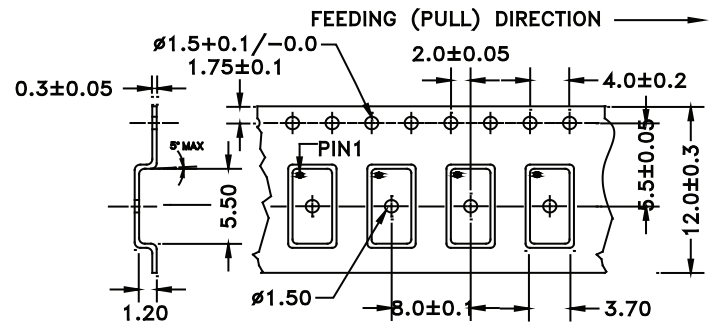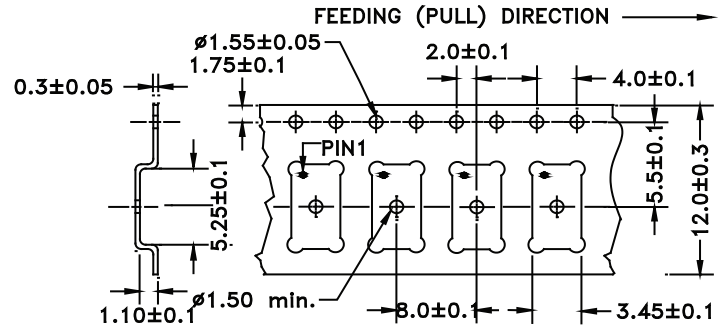

Tube: 72 pcs/tube



Unit orientation in tube:



Dimensions: mm



Need a test socket for the ASFLMB Series? To view compatible **PRECISION TEST SOCKETS** for these parts, [click here](#): PN: AXS-5032-04-07.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
 ISO9001:2008  
 CERTIFIED

**ABRACON CORPORATION**

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 05.06.13**  
 30332 Esperanza, Rancho Santa Margarita, California 92688  
 tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)