

CDBF0320/0330/0340

I_o = 350 mA

V_R = 20 to 40 Volts

RoHS Device




Features

- Low forward voltage.
- Designed for mounting on small surface.
- Extremely thin / leadless package.
- Majority carrier conduction.

Mechanical data

- Case: 1005/SOD-323F standard package molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any
- Weight: 0.006 gram(approx.).

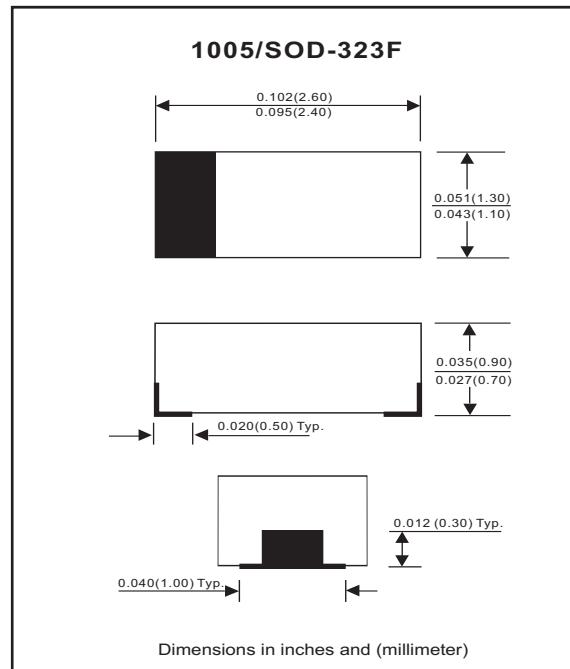

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Symbol	CDBF0320	CDBF0330	CDBF0340	Unit
Repetitive Peak reverse voltage Reverse voltage	V _{RRM} V _R	20	30	40	V
RMS reverse voltage	V _{R(RMS)}	14	21	28	V
Average forward rectified current	I _o		350		mA
Forward current, surge peak 8.3 ms single half sine-wave	I _{FSM}		1.5		A
Power dissipation	P _D		200		mW
Thermal resistance junction to ambient air	R _{θJA}		500		°C/W
Storage temperature	T _{STG}		-65 TO +125		°C
Junction temperature	T _j		+125		°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse current CDBF0320 CDBF0330 CDBF0340	V _R = 10V V _R = 20V V _R = 30V	I _R			5 5 5	uA
Forward voltage	I _F = 20mA I _F = 200mA	V _F			0.37 0.60	V
Capacitance between terminals	f = 1 MHz, and 0 VDC reverse voltage	C _T		50		pF
Reverse recovery time	I _F =I _R =10mA,I _{rr} =0.1xI _R ,RL=100 ohm	T _{rr}		6.4		nS

RATING AND CHARACTERISTIC CURVES (CDBF0320/0330/0340)

Fig. 1 - Forward characteristics

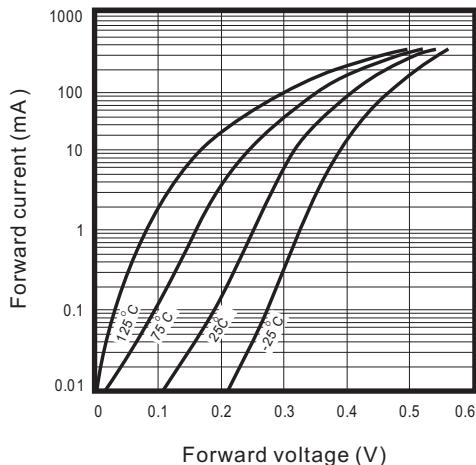


Fig. 2 - Reverse characteristics

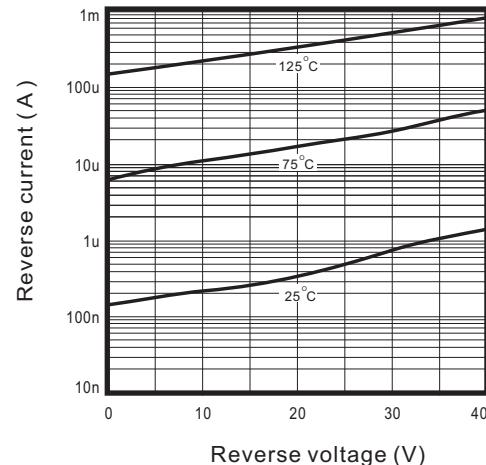


Fig.3 - Capacitance between terminals characteristics

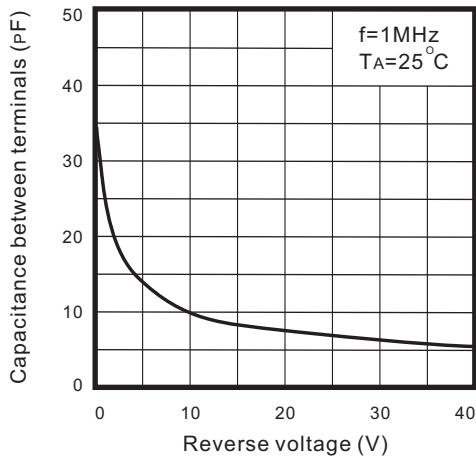


Fig.4 - Current derating curve

