



Solid State Devices, Inc.


14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

**SHM15 - SHM100
 and
 SHM15SMS - SHM100SMS**

**100-250 mA
 1500 – 10000 VOLTS
 5 µsec
 HIGH VOLTAGE
 RECTIFIER**

Designer's Data Sheet

Part Number / Ordering Information ^{1/}

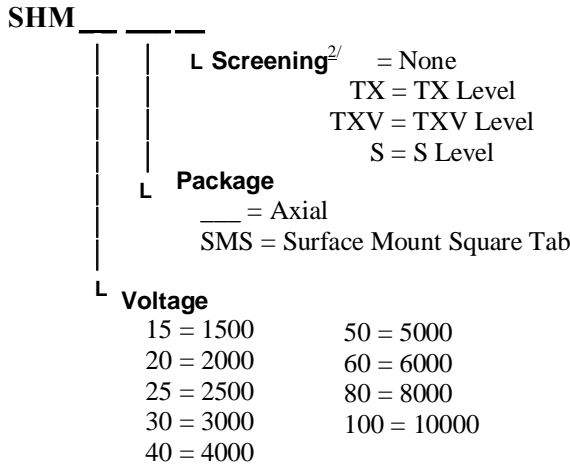

FEATURES:

- Standard Recovery: 5 µsec Maximum
- PIV to 10000 Volts
- Hermetically Sealed
- Void-Free Construction
- Metallurgically Bonded
- 175°C Maximum Operating Temperature
- TX, TXV, and Space Level Screening Available^{2/}

ELECTRICAL CHARACTERISTICS

Part Number	Peak Inverse Voltage	Average Rectifier Current		Maximum Reverse Current		Maximum Forward Voltage	Maximum Surge Current (1 Cycle)	Maximum Reverse Recovery Time	Maximum Junction Capacitance	Typical Thermal Impedance		
Symbol	PIV	I ₀		IR @ PIV		V _F	I _{FSM}	t _{RR}	C _J	θ _{JL}	θ _{JE}	
Units	Volts	mA		µA		Volts	Amps	µsec	pF	°C/W		
Conditions	Volts	25°C	100°C		25°C	100°C	25°C	25°C	25°C	VR = 100V fT = 1MHZ	°C/W	
			L	SMS								
SHM15	1500	250	185	215	1.0	25	6	15	5	8	65	55
SHM20	2000	250	185	215	1.0	25	6	15	5	8	65	55
SHM25	2500	250	185	215	1.0	25	6	15	5	8	65	55
SHM30	3000	150	110	130	1.0	25	10	10	5	4	65	55
SHM40	4000	150	110	130	1.0	25	10	10	5	4	65	55
SHM50	5000	150	110	130	1.0	25	10	10	5	4	65	55
SHM60	6000	100	75	85	1.0	25	16	5	5	2	65	55
SHM80	8000	100	75	85	1.0	25	16	5	5	2	65	55
SHM100	10000	100	75	85	1.0	25	16	5	5	2	65	55

^{1/} For Ordering Information, Price, Operating Curves, and Availability – Contact Factory.

^{2/} Screening based on MIL-PRF-19500. Screening flows available on request.

^{3/} Operating and testing over 10,000 V/inch may require encapsulation or immersion in a suitable dielectric material.


^{4/} Max. forward voltage measured with instantaneous forward pulse of 300µsec minimum.

^{5/} Max. lead temp. for soldering is 250°C, 3/8" from the case for 5 sec maximum.


^{6/} Operating and storage temperature: -65°C to +175°C.

^{7/} Reverse Recovery Test Conditions: IF=50mA, IR=100mA, IRR=25mA, TA=25°C.

Axial



SMS (Square)



NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RV0007B

DOC





Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

**SHM15 - SHM100
 and
 SHM15SMS - SHM100SMS**

PACKAGE OUTLINE: AXIAL RECTIFIER

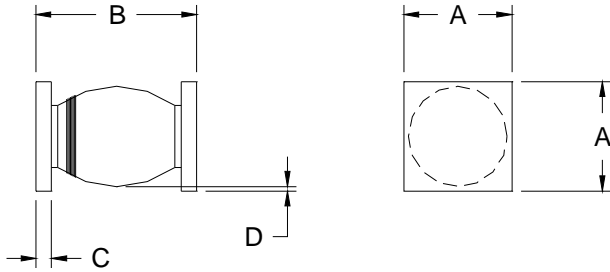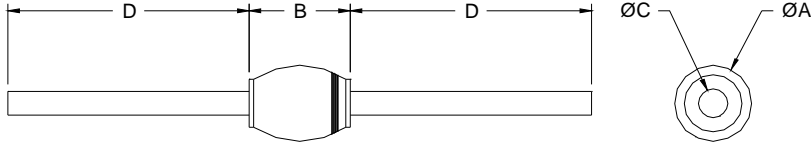

DIMENSIONS: SHM15-50		
DIM	MIN	MAX
A	---	.140"
B	---	.300"
C	0.025"	0.033"
D	1.0"	---

DIMENSIONS: SHM60-100		
DIM	MIN	MAX
A	---	.140"
B	---	.400"
C	0.025"	0.033"
D	1.0"	---

DIMENSIONS: SHM15-50		
DIM	MIN	MAX
A	.127"	.140"
B	.280"	.320"
C	0.022"	0.028"
D	.002"	---

DIMENSIONS: SHM60-100		
DIM	MIN	MAX
A	.127"	.140"
B	.360"	.450"
C	0.022"	0.028"
D	.002"	---

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RV0007B

DOC