
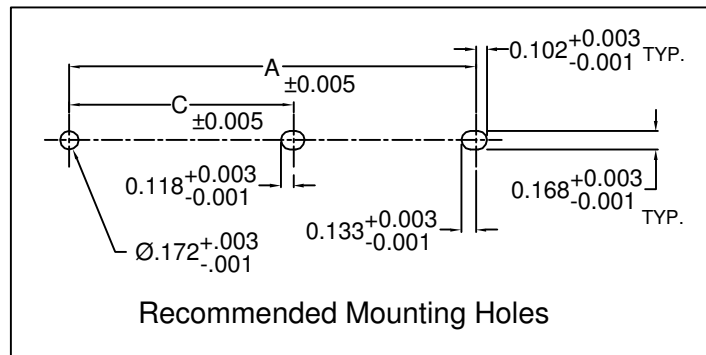


| REV. | DESCRIPTION | DATE | APPROVED |
|------|--------------------------------|----------|----------|
| C | Engineering Update w/o Changes | 02/26/04 | M. C. |
| | | | |
| | | | |
| | | | |

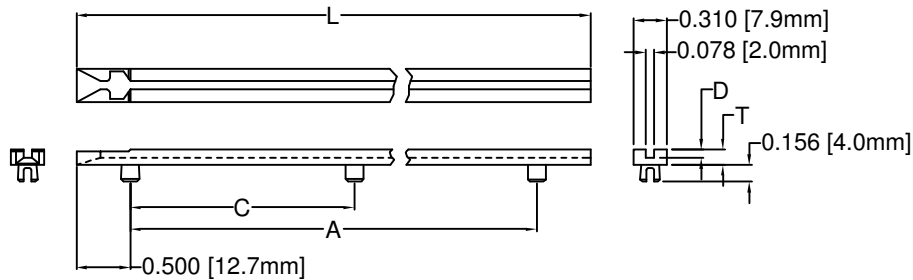

| PART NO. | L ±.062 (1.6) | A ±.032 (.81) | C +.016 (.41) -.032 (.81) | D ±.005 (.1) | T ±.005 (.1) |
|----------|------------------|------------------|---------------------------------|-----------------|-----------------|
| FR-200 | 1.969 (50.0) | .984 (25.0) | N/A | .078 (2.0) | .125 (3.2) |
| FR-250 | 2.469 (62.7) | | | | |
| FR-300 | 2.969 (75.4) | 1.484 (37.7) | N/A | .078 (2.0) | .125 (3.2) |
| FR-350 | 3.469 (88.1) | | | | |
| FR-400 | 3.939 (100.0) | | | | |
| FR-450 | 4.438 (112.7) | 2.969 (75.4) | N/A | .078 (2.0) | .125 (3.2) |
| FR-500 | 4.938 (125.4) | | | | |
| FR-550 | 5.438 (138.1) | | | | |
| FR-600 | 5.906 (150.0) | 4.953 (125.8) | N/A | .078 (2.0) | .125 (3.2) |
| FR-650 | 6.406 (162.7) | | | | |
| FR-700 | 6.875 (174.6) | | | | |
| FR-750 | 7.375 (187.3) | 5.969 (151.6) | N/A | .078 (2.0) | .125 (3.2) |
| FR-800 | 7.875 (200.0) | | | | |

| PART NO. | L ±.062 (1.6) | A +.016 (.41) -.047 (1.2) | C +.016 (.41) -.032 (.81) | D ±.005 (.1) | T ±.007 (.2) |
|----------|------------------|---------------------------------|---------------------------------|-----------------|-----------------|
| FR-850 | 8.375 (212.7) | | | | |
| FR-900 | 8.875 (225.4) | 7.469 (189.7) | 3.735 (94.9) | .078 (2.0) | .141 (3.6) |
| FR-950 | 9.375 (238.1) | | | | |
| FR-1000 | 9.875 (250.8) | | | | |
| FR-1050 | 10.375 (263.5) | 8.938 (227.0) | 4.469 (113.5) | .078 (2.0) | .141 (3.6) |
| FR-1100 | 10.875 (276.2) | | | | |
| FR-1150 | 11.344 (288.1) | | | | |
| FR-1200 | 11.844 (300.8) | 10.406 (264.3) | 5.203 (132.2) | .093 (2.4) | .156 (4.0) |
| FR-1250 | 12.344 (313.5) | | | | |
| FR-1300 | 12.812 (325.4) | | | | |
| FR-1350 | 13.312 (338.1) | 11.906 (302.4) | 5.953 (151.2) | .093 (2.4) | .156 (4.0) |
| FR-1400 | 13.812 (350.8) | | | | |

2. MATERIAL: NYLON 6/6, 94V-0, RUST. BIVAR MATERIAL CODE 20-RT.
RTP NYLON 6/6 0299 X 65077 B SC-92053, RUST OR MODIFIED PLASTICS MN6/6-SE RUST.
1. GENERAL SPECIFICATIONS: BIVAR MOLDED COMPONENT SPECIFICATION BV00-E101.

| STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) | |
|--|---------|
| DECIMALS | ANGULAR |
| .X ±.1 | X° ±1° |
| .XX ±.01 | |
| .XXX ±.005 | |

BIVAR[®]
4 THOMAS, IRVINE, CA. 92618
TEL: (949) 951-8808 FAX: (949) 951-3974



TITLE:
FLAME RETARDANT CARD GUIDE

DESIGNED:
David Green

DATE:
01/22/03

PART NO:
FR-XXX

REVISION:
C

CHECKED:
M. Chen

DATE:
01/22/03

CAGE CODE : 32559 SHEET # 1 OF 1
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.