



Thomas Research Products

SSL Solutions Faster Than The Speed Of Light®

**LED-60W Series– Fixed Output and Dimmable
Switch Mode LED Drivers
Constant Current & Constant Voltage with Isolation
Black Magic Thermal Advantage™ Aluminum Housing**

**Total Power: 60 Watts
Input Voltage: 100 - 277 Vac Nom.
Outputs: Single from 4 - 170 Vdc
Indoor or Outdoor Applications, IP66
High Power Factor
UL8750, EN61347, CSA 22.2
EN61000-3-2, EN61000-3-3 Class C**

Electrical Specifications

Input Voltage Range:	100-277 Vac Nom. (90-305 V Min/Max)
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Power Factor:	>0.90 @ full load, 100V through 277V
Inrush Current:	<30.0 Amps max @ 230 Vac, cold start 25°C
Input Current:	0.90 Amps max
Maximum Power:	60W
Current Accuracy:	± 1% Over input line variation
Load Regulation:	± 3%
THD:	≤ 20% @ full load
Leakage Current:	400 µA Typical
Hold Up Time:	Half Cycle
Protection:	Output Over-Voltage, Output Over-Current, and Output Short Circuit Protection reset by power cycling

Environmental Specifications

Operating Temperature:	-30°C to +65°C
Maximum Case Temp.	90°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 95%
Cooling:	Convection
Vibration Frequency:	5 to 55 Hz/2g, 30 minutes
MTBF:	418,000 Hours at full load and 40°C ambient conditions per MIL-217F Notice 2
EMC:	FCC 47CFR Part 15 Class B compliant



Constant Current - Product Specifications

Model Number	Output Current (mA ±3%)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency
LED60W-170-C0350-XX	350	56-170	60	92%
LED60W-134-C0450-XX	450	44-134	60	92%
LED60W-086-C0700-XX	700	28-86	60	92%
LED60W-058-C1050-XX	1050	19-58	60	91%
LED60W-048-C1250-XX	1250	16-48	60	91%
LED60W-043-C1400-XX	1400	14-43	60	91%
LED60W-036-C1670-XX	1670	12-36	60	91%
LED60W-027-C2300-XX	2300	9-27	60	90%
LED60W-024-C2500-XX	2500	8-24	60	90%
LED60W-022-C2720-XX	2720	7-22	60	89%
LED60W-020-C3000-XX	3000	7-20	60	89%
LED60W-018-C3330-XX	3330	6-18	60	88%
LED60W-015-C4000-XX	4000	5-15	60	87%
LED60W-012-C5000-XX	5000	4-12	60	87%

-XX indicates dimming options are available. See options at left. Blank = fixed current output

Constant Voltage - Product Specifications

Model Number	Output Voltage (Vdc ±5%)	Output Current Range (mA)	Max. Output Power (W)	Typical Efficiency
LED60W-170	170	88-350	60	92%
LED60W-134	134	113-450	60	92%
LED60W-086	86	175-700	60	92%
LED60W-058	58	263-1050	60	91%
LED60W-048	48	313-1250	60	91%
LED60W-043	43	350-1400	60	91%
LED60W-036	36	418-1670	60	91%
LED60W-027	27	575-2300	60	90%
LED60W-024	24	625-2500	60	90%
LED60W-022	22	680-2720	60	89%
LED60W-020	20	750-3000	60	89%
LED60W-018	18	833-3300	60	88%
LED60W-015	15	1000-4000	60	87%
LED60W-012	12	1250-5000	60	87%

Class 2: US/Canada US Only

Ordering Options:

- D: 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Gray on the output side. -D 0-10V Dimming is compatible with most quality 0-10V wall dimmers. See page 3 for additional specifications.
- PD: PWM Dimmable version comes with an extra two wires +Purple/-Gray on the output side. PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 200Hz to 1KHz, 0-10V Pulse. See page 4 for additional specifications.



Note:
LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED driver, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.

Specifications subject to change without notice.




Thomas Research Products

SSL Solutions Faster Than The Speed Of Light®


LED60W

Pg 2 of 4


Dimensions - mm

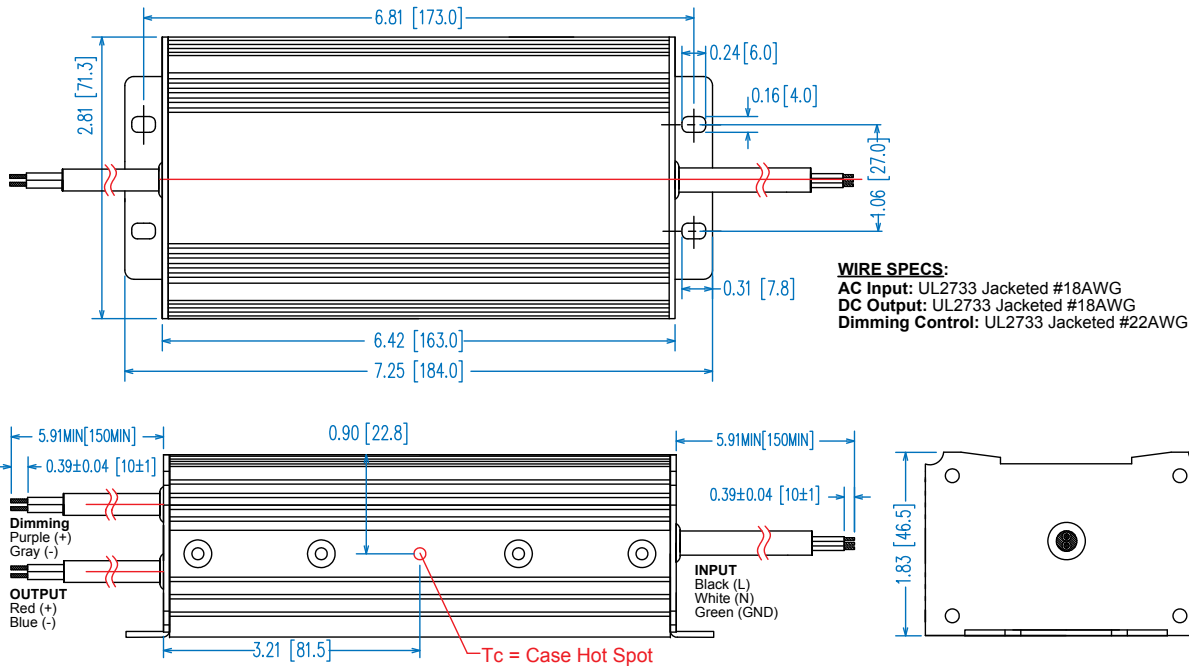


Power Factor / Load

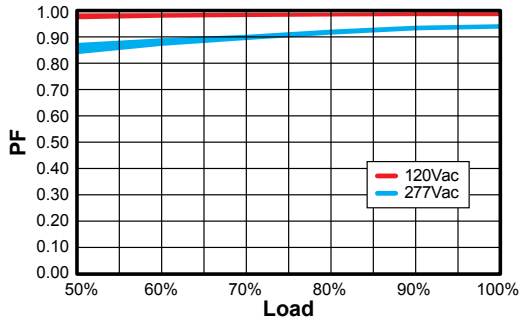

THD / Load

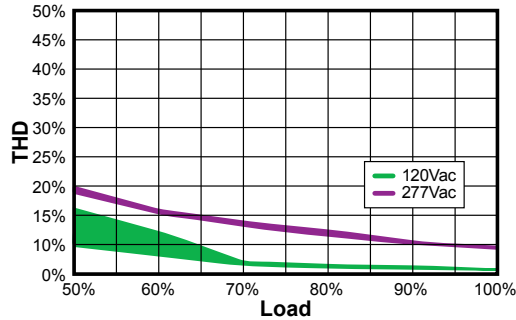

Lifetime / Case Temperature
 (Full Load @ 120Vac)

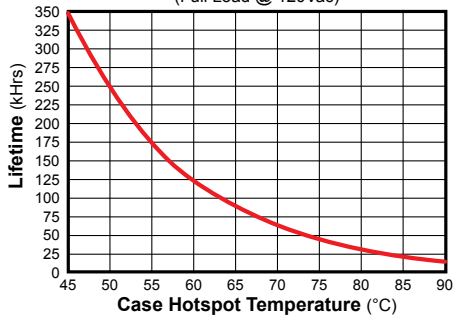

UL Conditions of Acceptability


See website for additional information



“-D” Option: 0-10VDC and Resistance Dimming


Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0 mA	—	10 mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0 V	—	+15 V

Typical Dimming Circuit

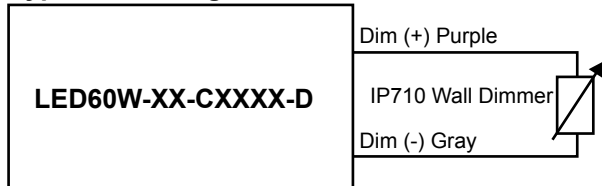

(Dimmer must be current-sink type control)

Output Current / 0-10VDC Dimming Input

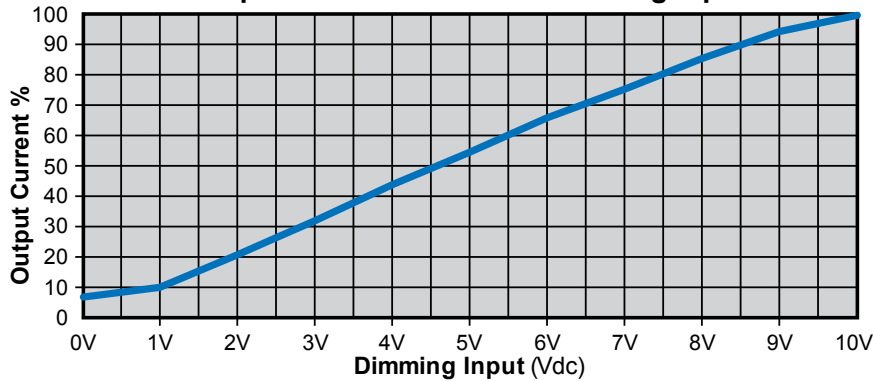

Notes:


1. 0-10V dimmable version comes with an extra two wires +Purple/-Gray on the output side.
2. Compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent
3. 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
4. 0-10V dimmable version output will be 100% with Purple/Gray open and minimum with Purple/Gray Shorted.




“-PD” Option: PWM Dimming

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+28V
Input LOW Level Voltage Range (Purple Wire)	-2.0	0V	+7.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0	10V	28V
Sink Current into PWM Input (Purple Wire)	0mA	—	1.2mA
PWM Input Signal Frequency	200Hz	—	1000Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%

PWM Positive Dimming Typical Circuit

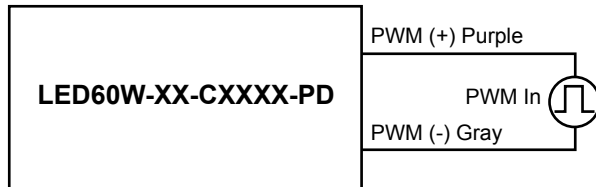

Output Current / Positive Duty Cycle

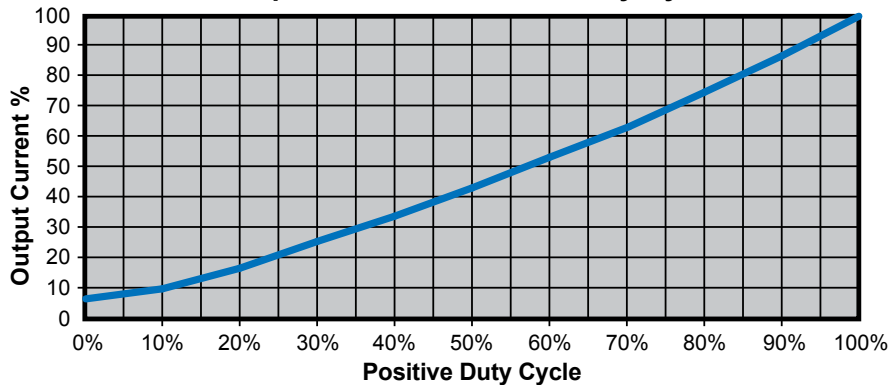

Notes:

1. PWM Dimmable version comes with an extra 2 wires +Purple/-Gray on the output side.
2. Below 10% Duty cycle proper dimming operation is not assured. Unit is not intended to turn off at <10% Duty Cycle.
3. PWM dimmable version output will be 100% with Purple/Gray open and minimum with Purple/Gray Shorted.