


Electrical

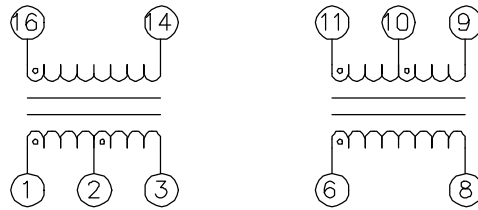


SCHEMATIC

ELECTRICAL SPECIFICATIONS @ 25°C

<p> TURNS RATIO (16-14):(1-2-3) : 1 : 1.36 CT± 3% TURNS RATIO (6-8 TO 11-10-9) : 1 : 2 CT± 5% PHASING : 1,6,11 AND 16 OCL (16-14 AND 6-8) : 1.50mH MIN @ 10mV MAX, 10KHz MIN L_L (16-14 AND 6-8) (1,2,3 AND 9,10,11)SH : 0.5 μH MAX @ 1MHz MIN C_{ww} (16,14) TO (1,2,3) : 35 pF @ 100KHz C_{ww} (6,8) TO (9,10,11) : 40 pF @ 100KHz DCR (16-14) = (6-8) : 0.9Ω MAX (1-2-3) = (11-10-9) : 1.3Ω MAX HI POT (PRI-SEC) : 1500Vrms </p>
--

Mechanical

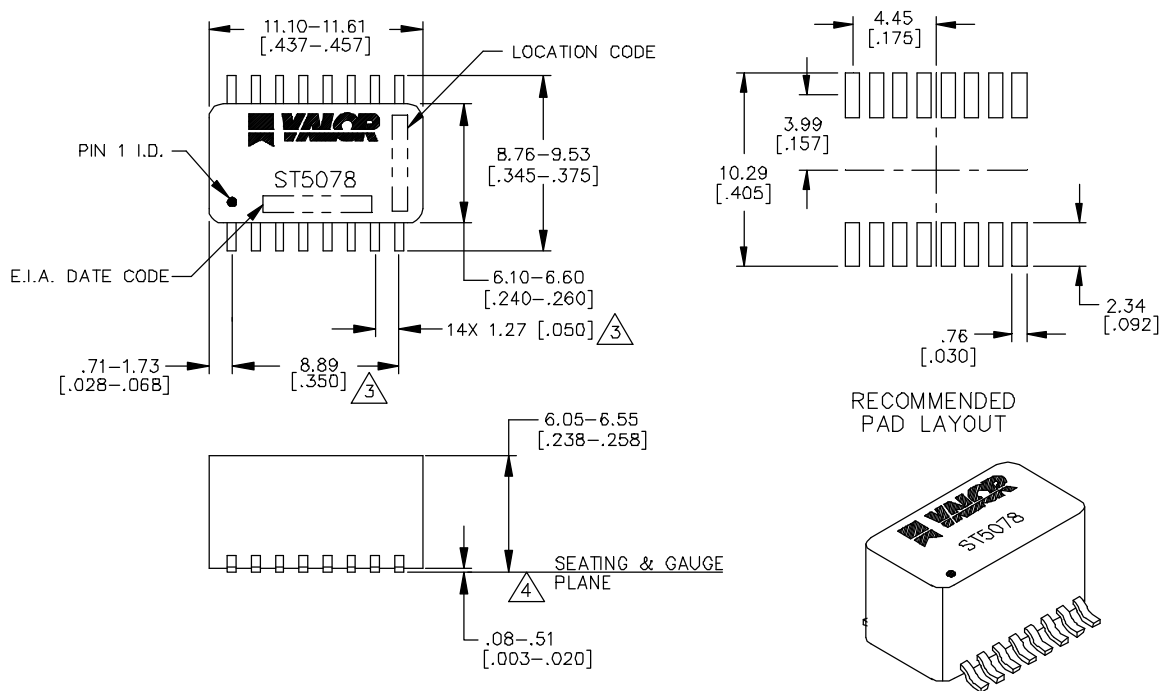

WEBSITE www.valorinc.com E-MAIL marketing@valorinc.com

NORTH AMERICA
 tel 1-800-31 VALOR
 fax 619-537-2525

ASIA/PACIFIC
 tel +852-2953-1000
 fax +852-2953-1333

EUROPE
 tel +44-1727-824 875
 fax +44-1727-824 898