


Electrical

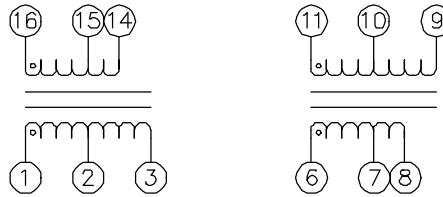


SCHEMATIC

ELECTRICAL SPECIFICATIONS @ 25°C

TURNS RATIO (1-2-3) : (16-15-14) TURNS RATIO (11-10-9) : (6-7-8) PHASING OCL (16-14) AND (6-8) L _L (16-14 AND 6-8) (1,2,3 AND 9,10,11) SHORT C _{ww} (16,15,14) TO (1,2,3) C _{ww} (6,7,8) TO (9,10,11) DCR (1,2,3) = (11,10,9) (16-14) = (6-8) HI POT (PRI-SEC)	: 2 CT : 1.26 TAP @ 1 (OR 1.587) ± 3% : 2 CT : 1.26 TAP @ 1 (OR 1.587) ± 3% : 1,6,11 AND 16 : 1.5mH MIN @ 10mV MAX, 10KHz MIN : 0.5 μH MAX @ 1MHz MIN : 40 pF MAX @ 100KHz : 35 pF MAX @ 100KHz : 1.0Ω MAX 0.7Ω MAX : 1500Vrms
--	---

Mechanical

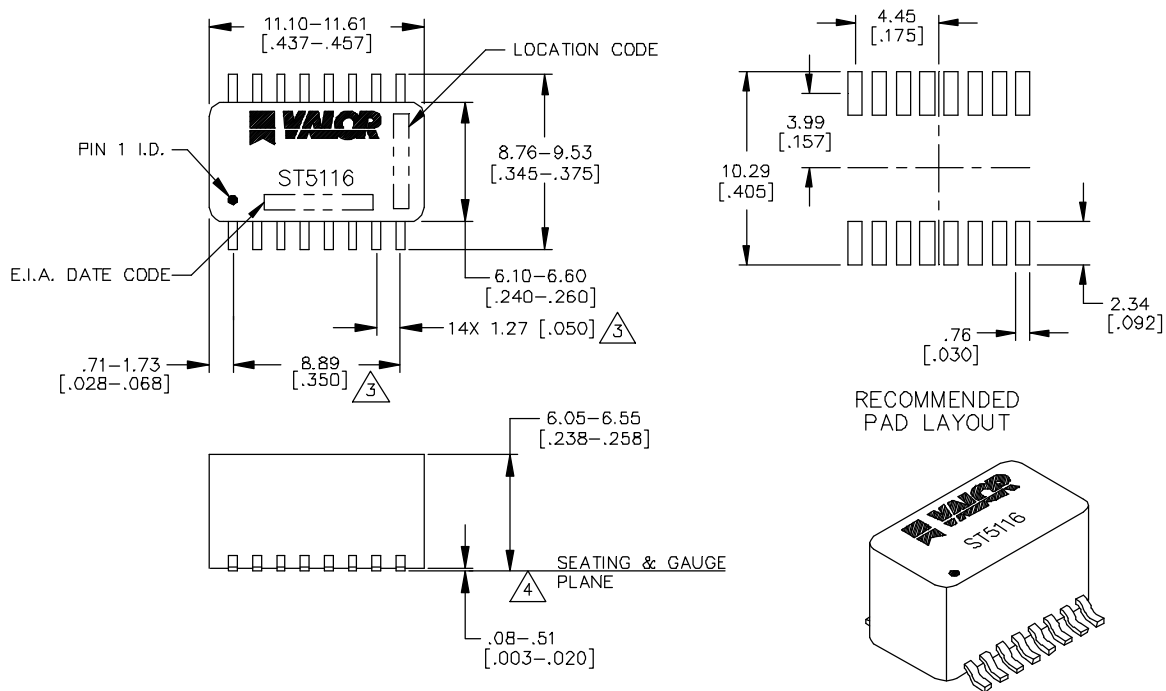

WEBSITE www.valorinc.com E-MAIL marketing@valorinc.com

NORTH AMERICA
 tel 1-800-31 VALOR
 fax 619-537-2525

ASIA/PACIFIC
 tel +852-2953-1000
 fax +852-2953-1333

EUROPE
 tel +44-1727-824 875
 fax +44-1727-824 898