

TUNABLE 1/4 WAVE 136-960 MHz


TUNABLE 1/4 WAVE COILS/WHIPS

Model	Frequency (MHz)	Gain (dBd/dBi)	Max Height (In)	Power Rating (Watts)	Whip Color	Cable Assembly
NMOQSPEC	136-960	0/2	22	200	Stainless	Order Separately
NMOQSPECB	136-960	0/2	22	200	Black	Order Separately
NMOQC	136-512	0/2	23	200	Stainless	Order Separately
NMOQB	136-512	0/2	23	200	Black	Order Separately
PQ	136-512	0/2	22	200	Stainless	Order Separately
Q	136-512	0/2	22	200	Stainless	Order Separately
QB	136-512	0/2	22	200	Black	Order Separately



TUNABLE 1/4 WAVE MAGNETIC MOUNTS

Model	Frequency (MHz)	Gain (dBd/dBi)	Max Height (In)	Power Rating (Watts)	Whip Color	Cable Assembly	Connector
MSTFME	144-965	0/2	21	50	Black	12' RG-174	FME Crimp

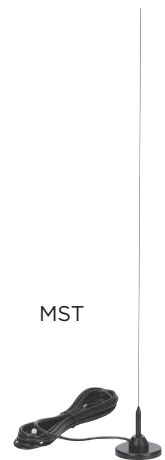

The most commonly used cable assembly/mount is the NMOKHFUD (27 MHz to 6 GHz) with 17' of UD (RG-58/U Dual Shield).

1 800 ANTENNA (268-3662)

NOTE: Antennas are not to scale