


Wireless External Dual Band Antenna for 2.4 GHz & 5.0 GHz Applications

Pulse Part Number W1043



The W1043 series offers superior transmission and reception between wireless access points and devices on a WLAN (Wireless Local Area Network). Wireless networks, especially those that are indoors, often have physical barriers which inhibit communication between wireless devices. These barriers cause blind spots, intermittent signal quality and interference. Selecting the correct external antenna can improve the range and reliability of wireless networks.

W1043 antennas offers an economical solution for OEMs of wireless devices. These antennas are compatible with IEEE 802.11a/b/g/n, Bluetooth® and ZigBee™ applications, as well as other 2.4 GHz and 5 GHz ISM frequency band uses. This dual-band antenna covers the 2.4 GHz and 5.0 GHz frequencies plus 5.15 GHz and 5.85 GHz.

Features

- Dual band, blade style antenna
- Omni directional radiation pattern provides broad 360° coverage
- RF efficient PCB radiator design
- RoHS Compliant Product

Applications

- WLAN devices using WiFi (802.11a/b/g), Bluetooth and ZigBee
- In-building wireless access points (AP)
- Replacements for wireless routers
- Spatial Diversity AP configurations

Electrical Specifications

Frequency 1 [MHz]		2400 - 2500
Frequency 2 [MHz]		4900 - 5825
Nominal Impedance [Ω]		50
VSWR	Freq 1	2:1
	Freq 2	2:1
Gain	Freq 1 [dBi avg]	2
	Freq 2 [dBi avg]	4
Radiation Pattern		Omni
Polarization		Linear Vertical
Power Rating [W]		3
Connector		RP SMA*

Environmental Specifications

Operating Temperature [°C]	-30 to +75
Storage Temperature [°C]	-30 to +85

Mechanical Specifications

Radome Material	PBT/PC+ABS
Color	Black*
Weight [oz/g]	.64 / 18.21
Dimensions [in/mm]	6.2 / 157.5

* Default configuration. For other colors/connector options, please contact Pulse for assistance.

Wireless External Dual Band Antenna for 2.4 GHz & 5.0 GHz Applications

Pulse Part Number W1043



Application Notes:

Omn-directional antennas provide a uniform, donut-shaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it can also be used for a variety of other applications within the specified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.



Radiation Patterns

NOTE: Tested in bent (articulated) position.

Horizontal Plane

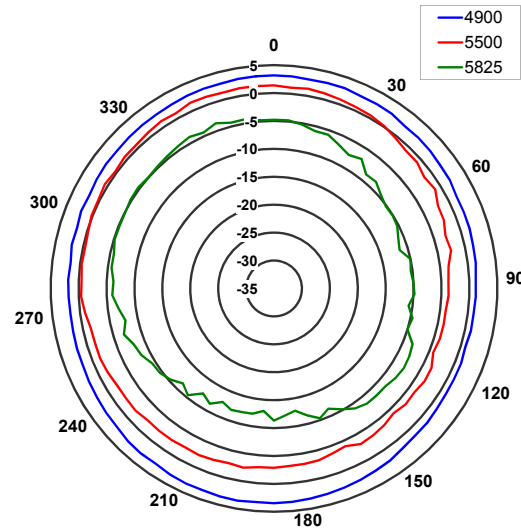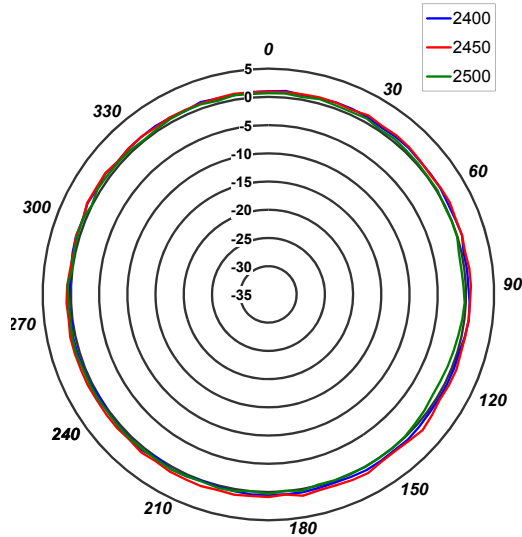

Vertical Plane

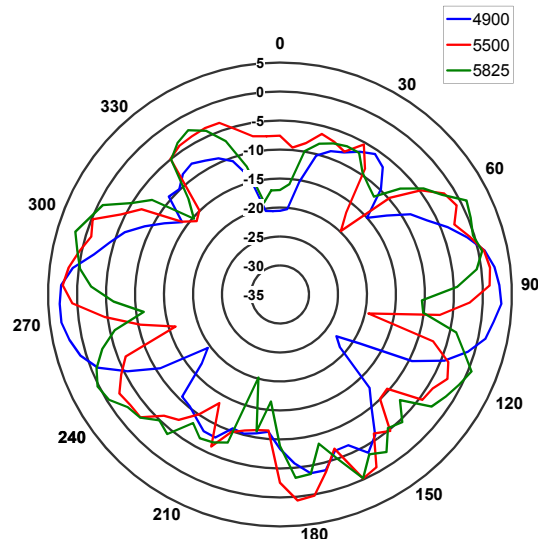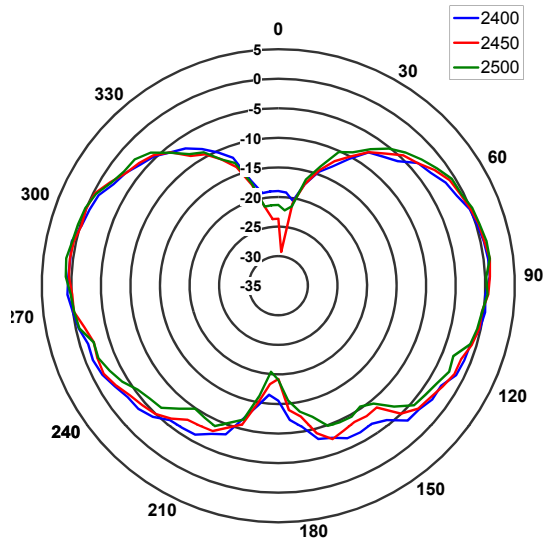

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Larsen Brand Antennas
3611 NE 112th Avenue
Vancouver, WA 98682
USA

Europe Headquarters
Pulse GmbH & Co. KG
Zeppelinstrasse 15
Herrenberg
Germany

Asia Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg,
10th Kejian Road, High-Tech Zone
Nanshan District, Shenzhen, PR China 518057

Pulse North Asia
3F, No. 198, Zhongyuan Road
Zhongli City, Taoyuan County 320
Taiwan R. O. C.

Pulse (Suzhou) Wireless Products Co., Inc.
99 Huo Ju Road, (#29 Bldg, 4th Phase)
Suzhou New District
Science & Tech Industrial Park
Jiangsu Province, Suzhou 215009 PR China

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 360 944 7551
Fax: 360 944 7556

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 886 3 4356768
Fax: 886 3 4356823

Tel: 86 512 6807 9998
Fax: 86 512 6809 8023

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2010, Pulse Electronics, Inc. All rights reserved.