



**Switch-Hitter™**

Constant Current LED Driver

**Model Number  
AC-40CDI.05ATAE**

Input Voltage: 120-277V  
Input Frequency: 50/60Hz  
Side Mount/Leads


✓ **MULTI-CURRENT SWITCHING & DIMMING**

✓ **CREE APPROVED**

**ELECTRICAL SPECIFICATIONS:**

Output Power Max.	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	Efficiency Up To	Dimming Protocol	Dimming Range
35W	44W @ 120V 43W @ 277V	0.35A @ 120V 0.16A @ 277V	>0.95	<20%	22-38V	900mA±5%	90° C	-40° C	83%	0 to 10V	10 to 100%
26W	31W @ 120V 30W @ 277V	0.26A @ 120V 0.11A @ 277V	>0.95	<20%	22-38V	700mA±5%	90° C	-40° C	82%	0 to 10V	10 to 100%
19W	23W @ 120V 22W @ 277V	0.19A @ 120V 0.08A @ 277V	>0.95	<20%	22-38V	500mA±5%	90° C	-40° C	82%	0 to 10V	10 to 100%


**WIRING:**

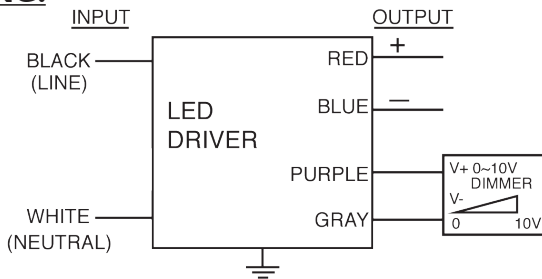

**Lead Lengths**

Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

**PHYSICAL:**

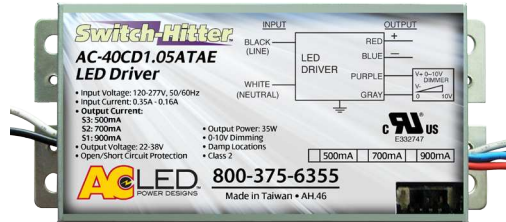

**Dimensions**

Length	6.5"	Mounting Length	5.9"
Width	2.9"	Weight	0.83 lbs.
Height	1.18"	Case Qty.	40 pcs.

**SAFETY & PERFORMANCE:**

- cUL Class 2
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- IP66
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C\*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

**INSTALLATION:**

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



\*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See [aceleds.com](http://aceleds.com) for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.