




Model Number AC-7ICD700UVHN

Type: Constant Current LED Driver Max Output Power: 7IW

ELECTRICAL SPECIFICATIONS:

Input Voltages	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Maximum	Minimum Starting Temp.	Efficiency Up To	Dimming Protocol	Dimming Range	IP Rating
120 to 277V 50/60Hz	0.7A @ I20V 0.3A @ 277V	>0.98	<20%	90 to 112V	700mA±5%	90° C	-30° C	85%	0 to 10V	10 to 100%	IP66

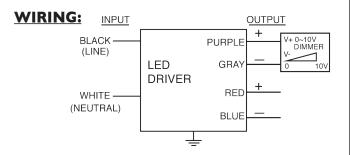

Wiring Lead	Wiring Lead Lengths					
White	5.9"					
Black	5.9"					
Red	5.9"					
Blue	5.9"					
Gray	5.9"					
Purple	5.9"					

PHYSICAL:



Dimensions					
Length	9.5" 2.4" 1.46"				
Width					
Height					
Mounting Length	8.9"				
Weight	1.78 lbs.				
Case Qty.	20 pcs.				

SAFETY & PERFORMANCE:

- · Class A sound rating
- No PCBs

- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required to use in installation LED driver cases should be grounded
- Max Remote installation distance is 18 ft



*A.C.E. warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See www.ace-ballast.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.