
UNCONTROLLED DOCUMENT

| PART | NUMBER |
|--------|----------|
| SSL-LX | (203CSOT |

REV.

| REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE |
|------|-------------------------------------|---------|
| Α | E.C.N. #11126. | 5.13.04 |

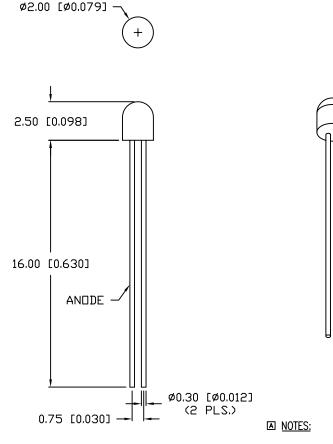

| ELECTRO-OPTICAL CH | ARACTERIS | TICS TA=25°C | | $I_f = 20 \text{mA}$ | |
|--------------------|-----------|--------------|-----|----------------------|-----------------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 610 | | nm | |
| FORWARD VOLTAGE | | 2.0 | 2.5 | v_f | |
| REVERSE VOLTAGE | 5.0 | | | V_r | I _r =100μΑ |
| AXIAL INTENSITY | | 10 | | mcd | $I_f = 20 \text{mA}$ |
| VIEWING ANGLE | | 160 | | 2x theta | |
| EMITTED COLOR: | ORANGE | | | | |
| EPOXY LENS FINISH: | ORANGE | TRANSPARENT | | | |

LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER | MAX | UNITS |
|-----------------------|---------------|------------|
| PEAK FORWARD CURRENT* | 150 | mA |
| STEADY CURRENT | 30 | mA |
| POWER DISSIPATION | 105 | mW |
| DERATE FROM 25°C | - 1.6 | mW/°C |
| OPERATING TEMP. | -25 TO +75 | . C |
| STORAGE TEMP. | - 25 TO + 100 | . C |
| SOLDERING TEMP. | + 260 | . C |
| 2.0mm FROM BODY | | 3 SEC. MAX |

^{*} t<10µS

1. ANODE MARK IS INDICATED BY A SMALL MARKING ON THE SIDE OF THE CERAMIC SURFACE.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002). MIN=+DECIMAL PR

REV. PART NUMBER SSL-LX203CSOT

T-2 CERAMIC STEM LED,

610nm SUPER ORANGE LED, ORANGE TRANSPARENT LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY:

2.9.01 PAGE: 1 OF 1

SCALE: N/A