
## UNCONTROLLED DOCUMENT

Ø9.00	[ø0.354] —	ø7.20	[ø0.283]
	/		
ø5.00	[ø0.197] $\overline{}$		

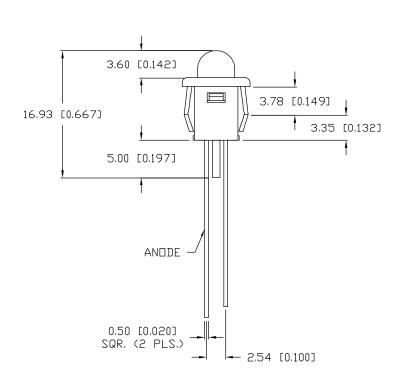

## PART NUMBER SSI-LXH387ID-4

E.C.N. NUMBER AND REVISION COMMENTS DATE E.C.N. #10BRDR. & REDRAWN. 8.2.01

REV.

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA						
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		635		nm		
FORWARD VOLTAGE		2.0	2.5	٧f		
REVERSE VOLTAGE	5.0			$V_r$	1 <sub>r</sub> =100,uA	
AXIAL INTENSITY		40		mcd	$I_f = 20 \text{mA}$	
VIEWING ANGLE		60		2x theta		
EMITTED COLOR:	RED					
EPOXY LENS FINISH:	RED DIFF	FUSED				

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-40  TO  +85	<b>.</b> C
SOLDERING TEMP.	+ 260	<b>°</b> C
2.0mm FROM BODY		3 SEC. MAX

\* t<10µS

## NOTES:

- 1. SSL-LX5093ID LED.
- 2. HOLDER: LXP-SSI-387BSH, LXP-SSI-387BZL.
- 3. PANEL HOLE CUT OUT: 5/16" DIAMETER.

UNCONTROLLED DOCUMENT 

REV. PART NUMBER SSI-LXH387ID-4

T-5 PANEL MOUNT INDICATOR. 635nm RED LED, RED DIFFUSED LENS.

CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR

IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY:

APPROVED BY: DATE: 8.26.96 PAGE: 1 OF 1 SCALE: N/A