
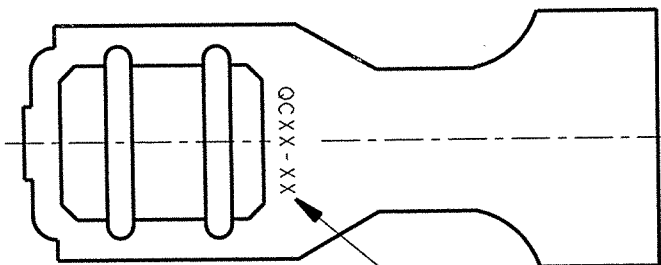
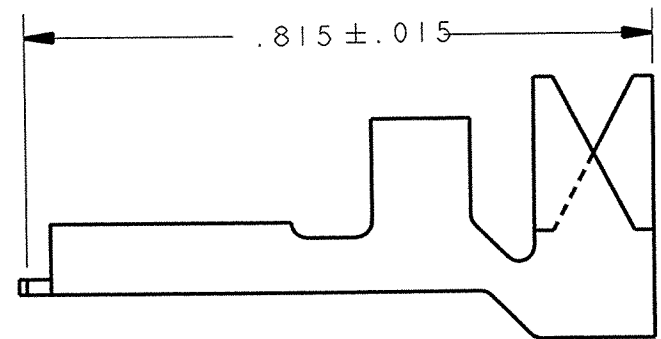


DEPT	1
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: FEMALE TERMINAL

**CUSTOMER DRAWING**





PART NO: 3000H 109/

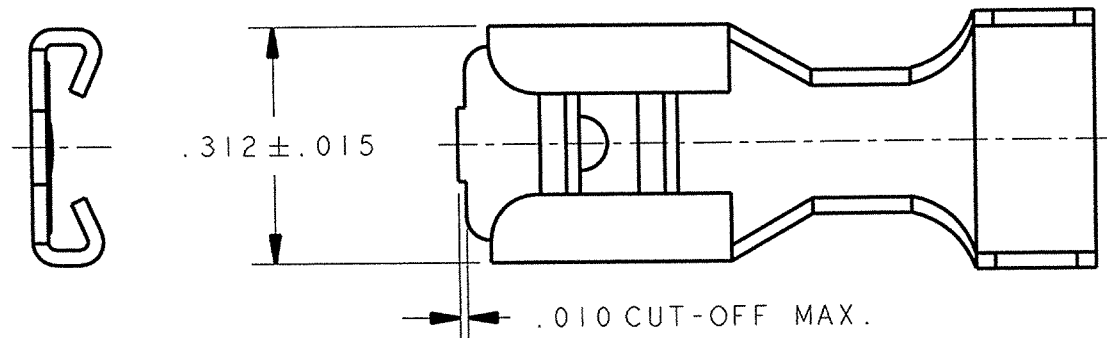

SEE TABLE FOR Q.C. STAMP

ARK-LES LETTERING THIS SIDE

ARK-LES LETTERING THIS SIDE



STANDARD REELING  
(I.E. 3000H 109A)

REVERSE REELING  
(I.E. 3000H 109AR)


REELING DIAGRAMS

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H 109A	.020 ±.001 THK. BRASS	PRETINNED	10-18
3000H 109AB	.020 ±.001 THK. BRASS	NONE	12-18
3000H 109AC	.020 ±.001 THK. BRASS	SILVER PLATE	10-18
3000H 109AN	.020 ±.001 THK. BRASS	NICKEL PLATE	12-18

NOTES:

1. TO MATE WITH .250 X .032 MALE TAB.
2. TO ACCOMMODATE #10-#18 GAUGE WIRE.
3. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 3000H 109AR)
4. INSULATION RANGE: .150-.250 DIA.
5. RECOMMENDED WIRE STRIP LENGTH: 5/32 #1/32.
6. FOR TERMINAL LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H 109A-1)

**ARK-LES UNCONTROLLED**

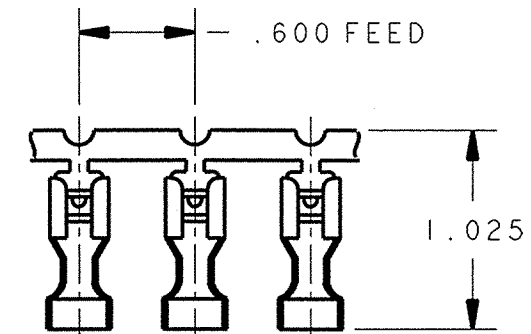

FABRICATED TERMINAL STRIP

SCALE: FULL

PROD. REL.	PER CAB	7/23/73	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:
QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
DR:	R. TASTULA	2/10/97		MATERIAL: SEE TABLE
CHK'D:	D. O'Neill	11/15/04		FINISH: SEE TABLE
S	REVISED PER ECR# S000085	9/27/04	DON	PART NO: 3000H 109/
R	REDRAWN, REV R WAS K PER ECR #11210	2/10/97	RT	
REV.	DESCRIPTION	DATE	DR.	SCALE: 4:1 CAD NO: 3000H_109-REVS_CUST.DR

ORIGINAL IF RED